VIBIA

Technical Catalogue February 2024

VIBIA

Recommended sales prices - vat not included this price list updates models and finishes in production, which may differ from photographs published in catalogue

Index

Africa
264

Algorithm Grid
68

Algorithm Free
62

Alpha
396

Array
112

Balance
236

Bamboo
218

Big
54

Big Built-in
58

Break
188

Break Plus
190

Brisa
206

Class
166

Cosmos
156

Dama
170

Domo
400

Dots
208

Dots Outdoor
212

Duo
222

Empty
192

Flamingo
96

Flamingo Mini
100

Flat
292

Fold Surface
194

Funnel
122

Ghost
232

Guise
130

Halo Circular
138

Halo Lineal
142

Halo Jewel
146

Halo Wall
154

I. Cono
60

Jazz
94

June
216

Knit
380

Kontur
356

Match
404

Mayfair
256

Mayfair Mini
254

Meridiano
214

Musa
378

North
266

Origami
200

Out
196

Palma
174

Palo Alto
204

Pin
104

Plis Outdoor
182

Plusminus
328

Puck
238

Puck Wall Art
242

Quadra Ice
90

Rhythm Horizontal
124

Rhythm Vertical
128

Set
390

Skan
10

Slim
80

Spa
306

Sticks Connectable
362

Sticks Stand-alone
376

Structural
160

Suite
312

Tempo
280

Top
92

Tube
320

Up
198

Vol
8

Warm
226

Wind
184

Wireflow
20

Wireflow Chandelier
50

Wireflow Freeform
36

Wireflow Lineal
32

45°
402

Bulbs
408

Professional area at vibia.com
409

Item coding
6

Glossary
410

Lighting control systems
411


Item coding

Some pendant models offer different electrical connection typology, these will require additional coding.

ITEM CODING

Reference

1160 10 / 1A _ 18

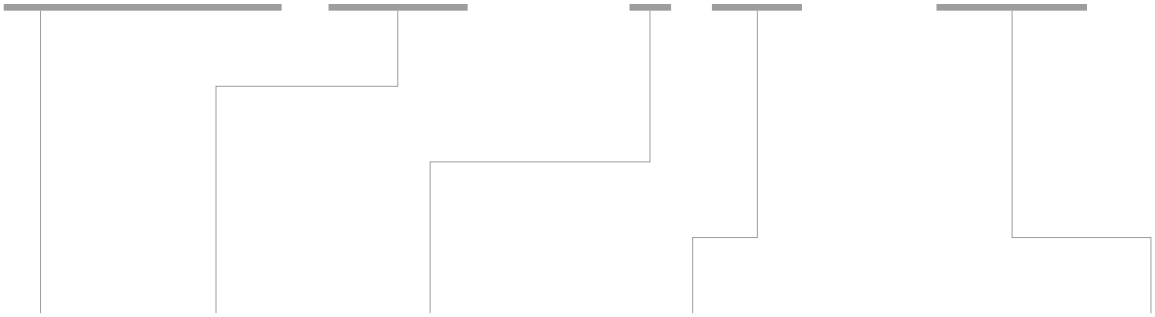


Model	Finish	LED temperature colour	Control	Electrical connection	
4 digits	2 digits	1 digit	1 digit	2 digits	
				Type	Model
		0 Without LED **1** 2700 K **2** 3000 K **3** 3500 K **4** 4000 K **7** 2200 K	**0** On/ Off **1** DALI **2** 0-10V **3** 1-10V **4** TRIAC **5** Push **6** Sensor **A** 1+3+5 (DALI + 1-10V + Push) **B** 3+5 (1-10V + Push) **C** 1+3 (DALI + 1-10V) **E** Casambi P2P + On/ Off **F** Simultaneous line DALI + 1-10V + Push + Casambi **Z** Casambi * **M** Without driver	**1** Surface **2** Built-in **3** Remote **4** Bolt-down	**0** Basic **1** Micro **2** XXS **3** XS **4** S **5** M **6** L **8** Free wire **9** Mud kit

* Casambi refers to wireless dimming solutions. Ask for more information.

Should you need a non-standard product. Please, request sales conditions.

Over the course of this year we shall proceed to standardise our finish codes.

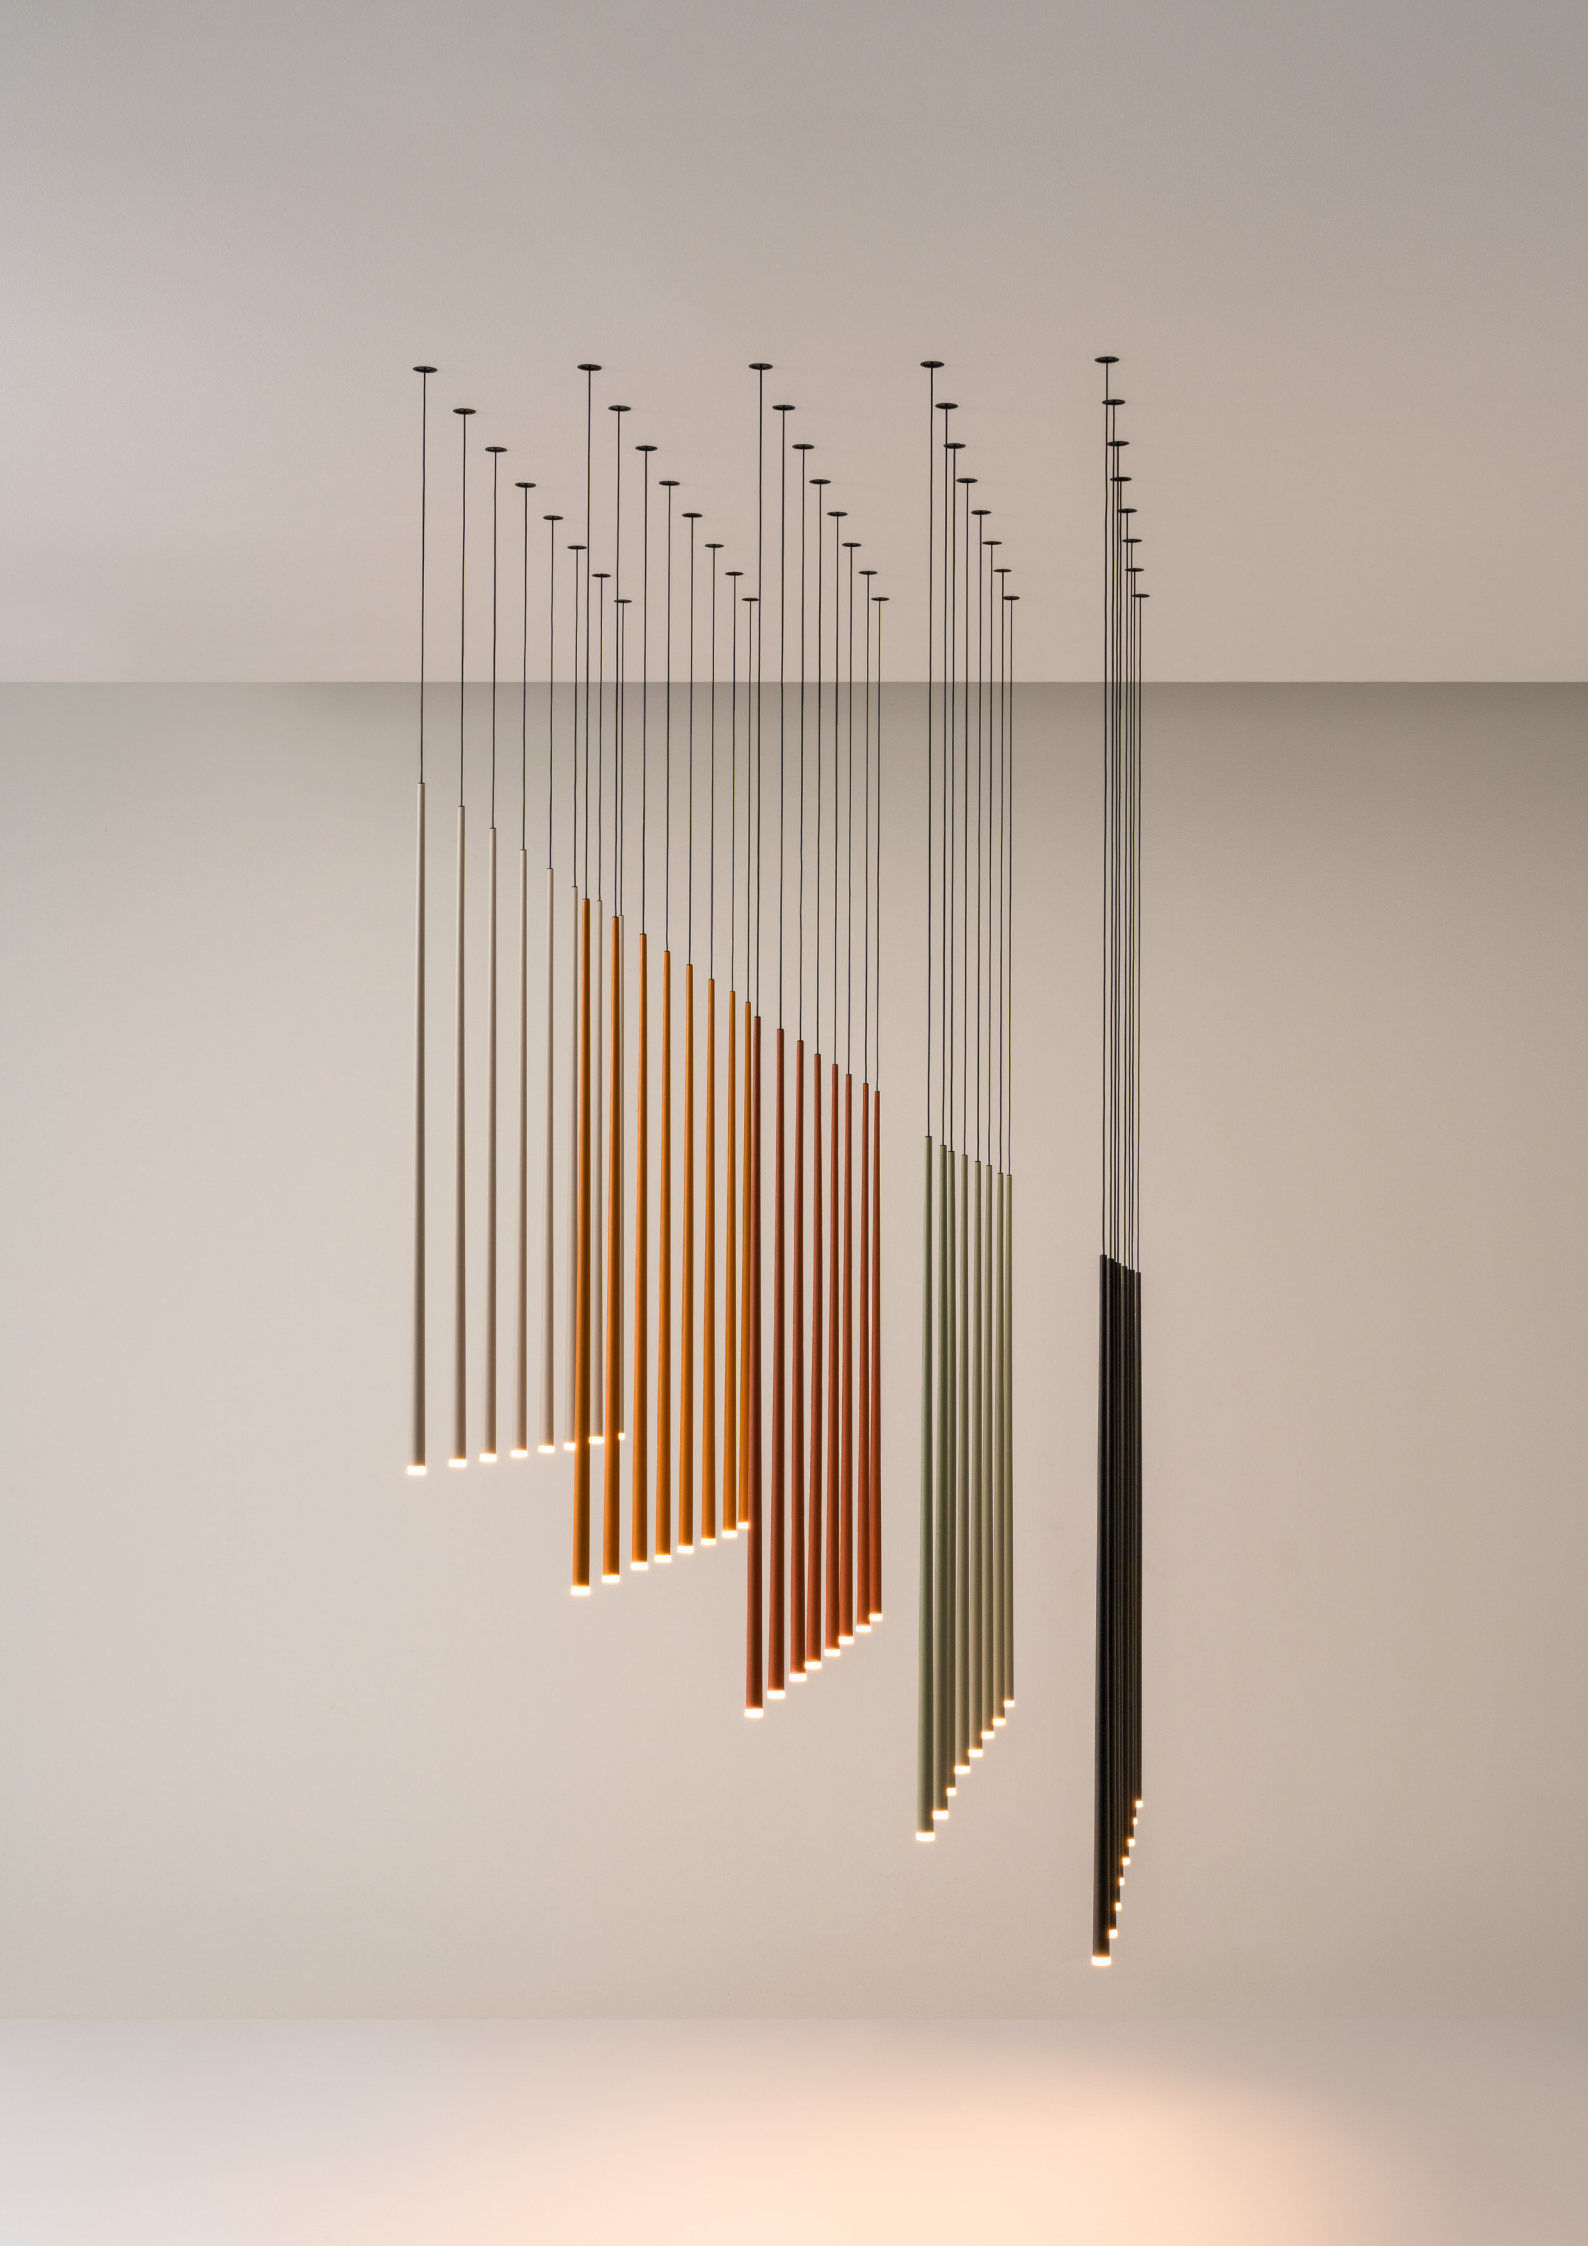

Vol

Design by Lievore, Altherr, Molina

Vol combines traditional techniques
and cutting-edge lighting capabilities.
Smooth and streamlined, the simple oval
forms create a delicate focal point in a space.


Pendants



ø 60 cm

0225

0225



Finishes
03 White
(RAL 9016)

LED temperature colour
2700 K 800 lm/W

0225 03

Materials
Shade: Glass. Disc: Aluminum.

Light Source and electronics
4 x LED E27 230V 9 W

Packaging
1 Box 0,78 x 0,78 x 0,50 m
Vol 0,3000 m³
Gross weight 11 Kg Net weight 9 Kg

Notes
Extra cable length.
UNTIL STOCK RUNS OUT

IP20 CE EAC

Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 | 10 | /1 | A
Model | Finish | LED temperature colour | Control




Skan


Design by Lievore, Altherr, Molina

Minimal volume and maximum lighting functionality.
Skan represents a return to what is essential: pure, delicate lines in which the light is the fundamental element while the shape is almost invisible.

Floor

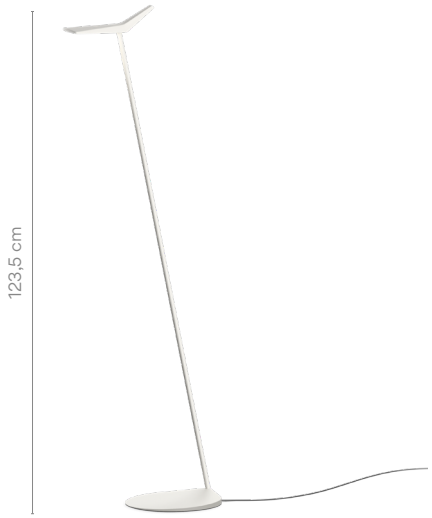


0250

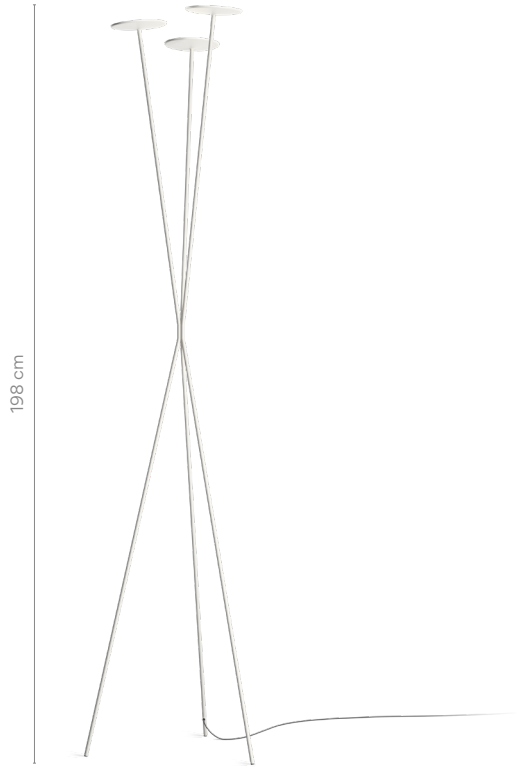

0260

0250



Finishes

10/ _ _ White
(NCS S 0300-N)

11/ _ _ Black
(NCS S 8500-N)

37/ _ _ Terra Red
(NCS S4040-Y70R)

Finish customization
(Available options:
Vibia colour palette)

LED temperature colour

/2 _ 3000 K
CRI >80 339,2 lm 42,4 lm/W

Control

0250 _ _ **/** _ **6**
Optical Sensor

Materials

Head: Aluminum. Diffuser: Methacrylate.
Base: Zamak.

Light Source and electronics

1 x LED PLATE 24V 8 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

1 Box 1,50 x 0,34 x 0,32 m
Vol 0,0418 m^3
Gross weight 6 Kg Net weight 3 Kg

Notes

UNTIL STOCK RUNS OUT

LED IP20 CE EAC

Dimmer Bi-volt


Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 | 10 | /1 | A

Model
Finish
LED temperature colour
Control



0260



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **37/** _ _ Terra Red (NCS S4040-Y70R)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K C
CRI >90 4430,16 lm 159 lm/W

/2 _ 3000 K E
CRI >90 3792,73 lm 136 lm/W

/3 _ 3500 K D
CRI >90 4799,9 lm 172,0 lm/W

Control

0260 _ _ **/** _ **5**
Push

Materials

Head: Aluminum. Diffuser: Methacrylate.
Vertical tube: Steel.

Light Source and electronics

3 x LED 9,2 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging


1 Box 2,11 x 0,60 x 0,60 m
Vol 0,7596 m³
Gross weight 5,4 Kg Net weight 2,5 Kg

LED IP20 CE EAC

Dimmer Bi-volt


Pendants

0270

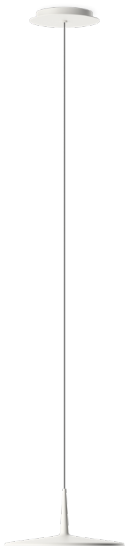


ø 30 cm

0271

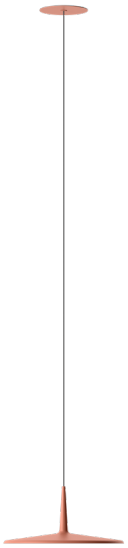


ø 30 cm

0275

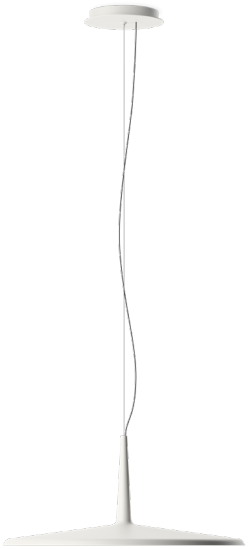


ø 60 cm

0276

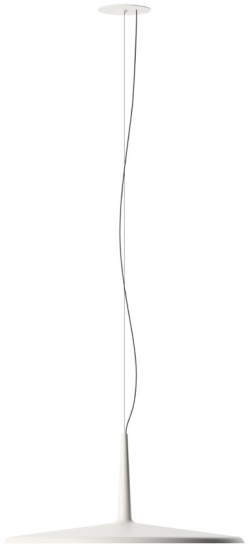

ø 60 cm

0280

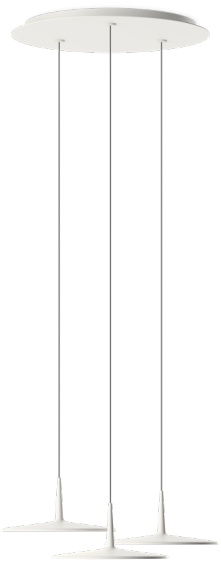

ø 30 cm

0282




ø 30 cm

Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 | 10 | /1 | A | _18

Model
Finish
LED temperature colour
Control
Electrical connection
Only for pendants

0270



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization (Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K D
CRI >90 1269 lm 141 lm/W

/2 _ 3000 K D
CRI >80 1123 lm 125 lm/W

/3 _ 3500 K G
CRI >90 1374,9 lm 152,8 lm/W

Control

0270 _ _ **/** _ **1**
DALI-2

0270 _ _ **/** _ **2**
0-10V

0270 _ _ **/** _ **Z**
Casambi

Materials

Body: Aluminum. Diffuser: Methacrylate.
Canopy Plate: Steel.

Light Source and electronics

1 x LED 9,3 W 350 mA
Constant Current 350 mA
110~277V 50/60Hz

Packaging

1 Box 0,29 x 0,38 x 0,38 m
Vol 0,0418 m³
Gross weight 2,6 Kg Net weight 1,4 Kg


Notes

Surface.

Extra cable length.

LED IP20 CE EAC Bi-volt

0271



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization (Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K D
CRI >90 1269 lm 141 lm/W

/2 _ 3000 K D
CRI >80 1269 lm 125 lm/W

/3 _ 3500 K G
CRI >90 1374,9 lm 152,8 lm/W

Control

0271 _ _ **/** _ **1**
DALI

0271 _ _ **/** _ **B**
1-10V, Push

0271 _ _ **/** _ **Z**
Casambi

Materials

Body: Aluminum. Diffuser: Methacrylate.
Canopy Plate: Steel.

Light Source and electronics

1 x LED 9,3 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,29 x 0,38 x 0,38 m
Vol 0,0418 m³
Gross weight 2,5 Kg Net weight 1,4 Kg

Notes

Built-in.

Extra cable length.


UNTIL STOCK RUNS OUT

LED IP20 CE EAC
Bi-volt ø 11,5 cm

Electrical connection

- Surface
- **_18** Free Wire
- **_23** Built-in
- **_31** Remote Micro for plaster ceilings
- **_32** Remote XXS for all types of drop ceilings

0275



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization (Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K F
CRI >90 1269 lm 91 lm/W

/2 _ 3000 K E
CRI >80 1575 lm 113 lm/W

/3 _ 3500 K F
CRI >90 1375,3 lm 98,9 lm/W

Control

0275 _ _ **/** _ **1**
DALI-2

0275 _ _ **/** _ **B**
1-10V, Push

0275 _ _ **/** _ **Z**
Casambi

Materials

Body: Aluminum. Diffuser: Methacrylate.
Canopy Plate: Steel.

Light Source and electronics

1 x LED 13,9 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging

1 Box 0,42 x 0,71 x 0,66 m
Vol 0,2000 m³
Gross weight 7 Kg Net weight 4,4 Kg


Notes

Surface.

Extra cable length.

LED IP20 CE EAC Bi-volt

0276



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization (Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K F
CRI >90 1269 lm 91 lm/W

/2 _ 3000 K E
CRI >80 1575 lm 113 lm/W

/3 _ 3500 K F
CRI >90 1375,3 lm 98,9 lm/W

Control

0276 _ _ **/** _ **1**
DALI-2

0276 _ _ **/** _ **B**
1-10V, Push

0276 _ _ **/** _ **Z**
Casambi

Materials

Body: Aluminum. Diffuser: Methacrylate.
Canopy Plate: Steel.

Light Source and electronics

1 x LED 13,9 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging

1 Box 0,42 x 0,71 x 0,66 m
Vol 0,2000 m³
Gross weight 7 Kg Net weight 4,4 Kg

Notes

Suitable for built-in and surface fitting.


Extra cable length.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC
Bi-volt ø 11,5 cm

Product specifications subject to change without notice. Please check vibia.com for updated information.

0280



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

- **/1** _ 2700 K E
  CRI >90 3123 lm 112 lm/W
- **/2** _ 3000 K E
  CRI >80 3369 lm 121 lm/W
- **/3** _ 3500 K E
  CRI >90 4124,7 lm 147,8 lm/W

Control

- **0280** _ _ / _ **1**
  DALI-2
- **0280** _ _ / _ **B**
  1-10V, Push
- **0280** _ _ / _ **Z**
  Casambi

Materials

Body: Aluminum. Diffuser: Methacrylate.
Canopy Plate: Steel.

Light Source and electronics

3 x LED 9,3 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,2226 m^3
Gross weight 13,7 Kg Net weight 9,2 Kg

Notes

Surface.
Extra cable length.

LED IP20 CE EAC Bi-volt

0282



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

- **/1** _ 2700 K E
  CRI >90 5205 lm 112 lm/W
- **/2** _ 3000 K E
  CRI >80 5615 lm 121 lm/W
- **/3** _ 3500 K E
  CRI >90 6874,5 lm 147,8 lm/W

Control

- **0282** _ _ / _ **1**
  DALI-2
- **0282** _ _ / _ **B**
  1-10V, Push
- **0282** _ _ / _ **Z**
  Casambi

Materials

Body: Aluminum. Diffuser: Methacrylate.
Canopy Plate: Steel.

Light Source and electronics

5 x LED 9,3 W 350mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,3290 m^3
Gross weight 36,9 Kg Net weight 29 Kg


Notes

Surface.
Extra cable length.


LED IP20 CE EAC Bi-volt

Composing pendants


Next sketches are composed by one or more compositions

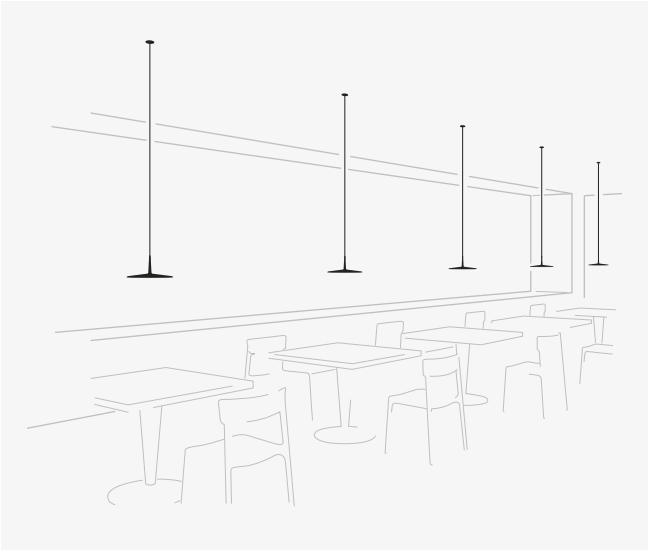

5 x 0270.

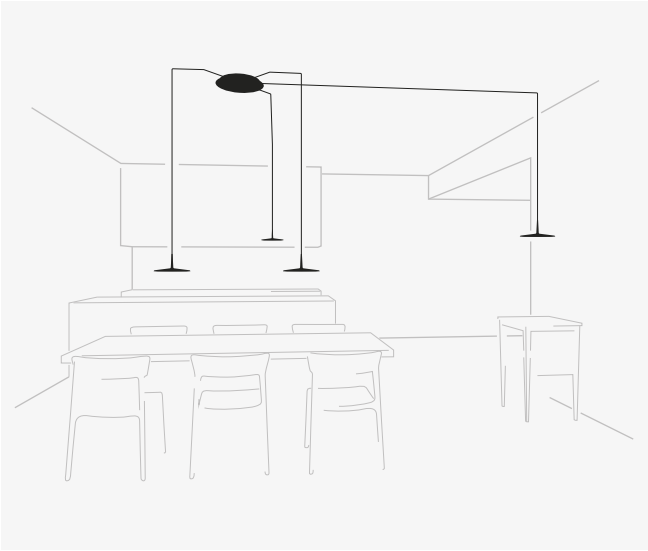

4 x 0270.

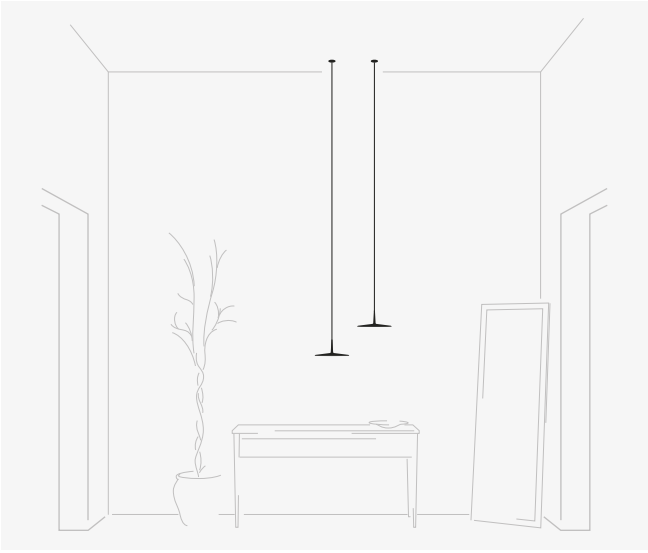

2 x 0270.

Each project is unique. Visit vibia.com and chose among multiple compositions designed and adapted to your project needs.

Personalise your own Skan composition quick and easy at vibia.com



Electrical connection options for model 0270

Choose your preferred installation option accordingto your needs.
For each composition, the optimal minimum number of drivers will be delivered.

Drop ceiling

The innovative remote and built-in fittings accentuate the silkiness and lightness of compositions on suspended ceilings, its great visual grandeur taking center stage.

For Ref. 0270

Remote



Micro ø 3 cm
height 7 cm
for plaster ceilings. Black finish.





XXS ø 6 cm
height 6 cm
for all types of drop ceilings. Match with fixture finish.

Built-in



ø 8 cm
height 6 cm
match with fixture finish.







Product specifications subject to change without notice. Please check vibia.com for updated information.

Regular ceiling

When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.

For Ref. 0270


Surface




ø 17,3 cm

match with fixture finish.


Free Wire




ø 20 cm



ø 22 cm





ø 36 cm



ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendants.







Wireflow

Design by Arik Levy


Crafted of black, electrical cables, Volumetric's airy, three-dimensional outline lends it the feeling of being at once present and absent. The geometric volumes are tipped with LED light terminals in a contemporary take on the traditional chandelier.



Product specifications subject to change without notice. Please check vibia.com for updated information.


Each project is unique. Visit vibia.com and chose among multiple compositions designed and adapted to your project needs.

Personalise your own Wireflow composition quick and easy at vibia.com

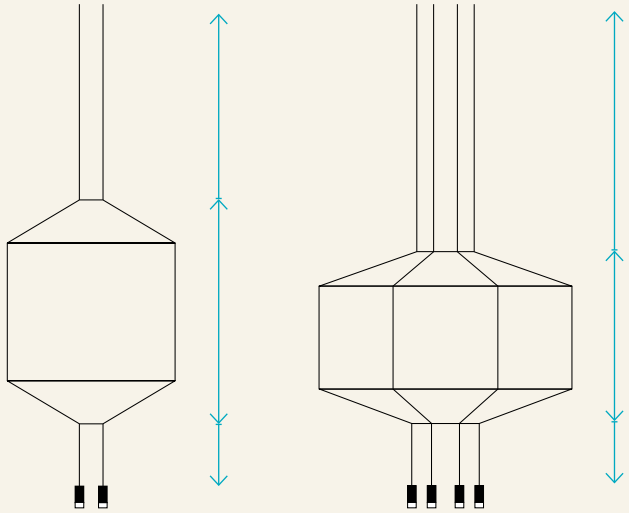


Pressed-glass diffuser.
*Without pressed-glass diffuser.





0299



Finishes

04/ _ _ Black
(RAL 9005)

LED temperature colour

/1 _ 2700 K D
CRI >90 3880 lm 121 lm/W

/2 _ 3000 K E
CRI >90 3880 lm 121 lm/W

/3 _ 3500 K E
CRI >90 4002,4 lm 125,1 lm/W

Control

0299 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0299 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Pressed-glass. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.

Light Source and electronics

8 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,3245 m³
Gross weight 20,6 Kg Net weight 9,6 Kg


Notes

Pressed-glass diffuser.

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply

LED IP20 CE EAC Bi-volt

0300



Finishes

● **04/** _ _ Black
(RAL 9005)

LED temperature colour

/1 _ 2700 K D
CRI >90 3880 lm 121 lm/W

/2 _ 3000 K E
CRI >90 3880 lm 121 lm/W

/3 _ 3500 K E
CRI >90 4002,4 lm 125,1 lm/W

Control

0300 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0300 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Pressed-glass. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.

Light Source and electronics

8 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,3246 m³
Gross weight 19,95 Kg Net weight 8,95 Kg


Notes

Pressed-glass diffuser.

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply

LED IP20 CE EAC Bi-volt

0301



Finishes

● **04/** _ _ Black
(RAL 9005)

LED temperature colour

/1 _ 2700 K D
CRI >90 3880 lm 121 lm/W

/2 _ 3000 K E
CRI >90 3880 lm 121 lm/W

/3 _ 3500 K E
CRI >90 4002,4 lm 125,1 lm/W

Control

0301 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0301 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Pressed-glass. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.

Light Source and electronics

8 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,2100 m³
Gross weight 17,75 Kg Net weight 8,75 Kg


Notes

Pressed-glass diffuser.

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

LED IP20 CE EAC Bi-volt

0302



Finishes

● **04/** _ _ Black
(RAL 9005)

LED temperature colour

/1 _ 2700 K D
CRI >90 3880 lm 121 lm/W

/2 _ 3000 K E
CRI >90 3880 lm 121 lm/W

/3 _ 3500 K E
CRI >90 4002,4 lm 125,1 lm/W

Control

0302 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0302 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Pressed-glass. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.

Light Source and electronics

8 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,1558 m³
Gross weight 14,6 Kg Net weight 8,6 Kg


Notes

Pressed-glass diffuser.

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

LED IP20 CE EAC Bi-volt

0303



Finishes
● **04/** _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 3880 lm 121 lm/W
/2 _ 3000 K E
CRI >90 3880 lm 121 lm/W
/3 _ 3500 K E
CRI >90 4002,4 lm 125,1 lm/W

Control
0303 _ _ **/** _ **A**
DALI-2, 1-10V, Push
0303 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Pressed-glass. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.


Light Source and electronics
8 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1558 m³
Gross weight 13 Kg Net weight 8,5 Kg

Notes
Pressed-glass diffuser.
Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

LED IP20 CE EAC Bi-volt

0304



Finishes
● **04/** _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 2910 lm 121 lm/W
/2 _ 3000 K E
CRI >90 2910 lm 121 lm/W
/3 _ 3500 K E
CRI >90 3001,8 lm 125,1 lm/W

Control
0304 _ _ **/** _ **A**
DALI-2, 1-10V, Push
0304 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Pressed-glass. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.


Light Source and electronics
6 x LED 4,5W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,3245 m³
Gross weight 15,55 Kg Net weight 5,65 Kg

Notes
Pressed-glass diffuser.
Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0305



Finishes
● **04/** _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 2910 lm 121 lm/W
/2 _ 3000 K E
CRI >90 2910 lm 121 lm/W
/3 _ 3500 K E
CRI >90 3001,8 lm 125,1 lm/W

Control
0305 _ _ **/** _ **A**
DALI-2, 1-10V, Push
0305 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Pressed-glass. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.


Light Source and electronics
6 x LED 4,5W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,2100 m³
Gross weight 13,2 Kg Net weight 3,5 Kg

Notes
Pressed-glass diffuser.
Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0306



Finishes

● **04/** _ _ Black
(RAL 9005)

LED temperature colour

/1 _ 2700 K D
CRI >90 2910 lm 121 lm/W

/2 _ 3000 K E
CRI >90 2910 lm 121 lm/W

/3 _ 3500 K E
CRI >90 3001,8 lm 125,1 lm/W

Control

0306 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0306 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Pressed-glass. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.

Light Source and electronics

6 x LED 4,5W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,2100 m³
Gross weight 13,1 Kg Net weight 5,2 Kg

Notes


Pressed-glass diffuser.

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0307



Finishes

● **04/** _ _ Black
(RAL 9005)

LED temperature colour

/1 _ 2700 K D
CRI >90 2910 lm 121 lm/W

/2 _ 3000 K E
CRI >90 2910 lm 121 lm/W

/3 _ 3500 K E
CRI >90 3001,8 lm 125,1 lm/W

Control

0307 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0307 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Pressed-glass. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.

Light Source and electronics

6 x LED 4,5W 350mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,1558 m³
Gross weight 10 Kg Net weight 5,1 Kg

Notes


Pressed-glass diffuser.

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0308



Finishes

● **04/** _ _ Black
(RAL 9005)

LED temperature colour

/1 _ 2700 K D
CRI >90 2910 lm 121 lm/W

/2 _ 3000 K E
CRI >90 2910 lm 121 lm/W

/3 _ 3500 K E
CRI >90 3001,8 lm 125,1 lm/W

Control

0308 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0308 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Pressed-glass. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.

Light Source and electronics

6 x LED 4,5W 350mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,1238 m³
Gross weight 8,4 Kg Net weight 5 Kg

Notes


Pressed-glass diffuser.

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0309



Finishes
● **04/** _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 1940 lm 121 lm/W
/2 _ 3000 K E
CRI >90 1940 lm 121 lm/W
/3 _ 3500 K E
CRI >90 2001,2 lm 125,1 lm/W

Control
0309 _ _ **/** _ **A**
DALI-2, 1-10V, Push
0309 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Pressed-glass. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.


Light Source and electronics
4 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,2100 m³
Gross weight 12,3 Kg Net weight 5,3 Kg

Notes
Pressed-glass diffuser.
Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

LED IP20 CE EAC Bi-volt

0310



Finishes
● **04/** _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 1940 lm 121 lm/W
/2 _ 3000 K E
CRI >90 1940 lm 121 lm/W
/3 _ 3500 K E
CRI >90 2001,2 lm 125,1 lm/W

Control
0310 _ _ **/** _ **A**
DALI-2, 1-10V, Push
0310 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Pressed-glass. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.


Light Source and electronics
4 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,2100 m³
Gross weight 11,8 Kg Net weight 4,8 Kg

Notes
Pressed-glass diffuser.
Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply

LED IP20 CE EAC Bi-volt

0311



Finishes
● **04/** _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 1940 lm 121 lm/W
/2 _ 3000 K E
CRI >90 1940 lm 121 lm/W
/3 _ 3500 K E
CRI >90 2001,2 lm 125,1 lm/W

Control
0311 _ _ **/** _ **A**
DALI-2, 1-10V, Push
0311 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Pressed-glass. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.


Light Source and electronics
4 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1558 m³
Gross weight 8,7 Kg Net weight 4,7 Kg

Notes
Pressed-glass diffuser.
Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply

LED IP20 CE EAC Bi-volt

0312



Finishes

● **04/** _ _ Black
(RAL 9005)

LED temperature colour

/1 _ 2700 K D
CRI >90 1940 lm 121 lm/W

/2 _ 3000 K E
CRI >90 1940 lm 121 lm/W

/3 _ 3500 K E
CRI >90 2001,2 lm 125,1 lm/W

Control

0312 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0312 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Pressed-glass. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.

Light Source and electronics

8 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,1558 m³
Gross weight 8,6 Kg Net weight 4,6 Kg


Notes

Pressed-glass diffuser.

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply

LED IP20 CE EAC Bi-volt

0313



Finishes

● **04/** _ _ Black
(RAL 9005)

LED temperature colour

/1 _ 2700 K D
CRI >80 1961 lm 109 lm/W

Control

0313 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0313 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Pressed-glass. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.

Light Source and electronics

4 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,1238 m³
Gross weight 7 Kg Net weight 4,5 Kg

Notes


Pressed-glass diffuser.

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0399



Finishes

● **04/** _ _ Black
(RAL 9005)

LED temperature colour

/1 _ 2700 K D
CRI >90 3880 lm 121 lm/W

Control

0399 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0399 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.

Light Source and electronics

8 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,3245 m³
Gross weight 20,6 Kg Net weight 9,6 Kg

Notes


Without pressed-glass diffuser.

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0400



Finishes
04/ _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 3880 lm 121 lm/W

Control
0400 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0400 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Polycarbonate. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.

Light Source and electronics
8 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,3245 m³
Gross weight 20,20 Kg Net weight 8,95 Kg


Notes
Without pressed-glass diffuser.

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0401



Finishes
04/ _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 3880 lm 121 lm/W

Control
0401 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0401 _ **/** _ **Z**
Casambi

Materials
Diffuser: Polycarbonate. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.

Light Source and electronics
8 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,2100 m³
Gross weight 17,75 Kg Net weight 8,75 Kg


Notes
Without pressed-glass diffuser.

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0402



Finishes
04/ _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 3880 lm 121 lm/W

Control
0402 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0402 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Polycarbonate. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.

Light Source and electronics
8 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1558 m³
Gross weight 16,95 Kg Net weight 8,6 Kg


Notes
Without pressed-glass diffuser.

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0403



Finishes
● **04/** _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 3880 lm 121 lm/W

Control
0403 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0403 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Polycarbonate. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.

Light Source and electronics
8 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1558 m³
Gross weight 16,65 Kg Net weight 8,5 Kg


Notes
Without pressed-glass diffuser.

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0404



Finishes
● **04/** _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 2910 lm 121 lm/W

Control
0404 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0404 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Polycarbonate. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.

Light Source and electronics
6 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,3245 m³
Gross weight 15,55 Kg Net weight 5,65 Kg


Notes
Without pressed-glass diffuser.

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0405



Finishes
● **04/** _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 2910 lm 121 lm/W

Control
0405 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0405 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Polycarbonate. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.

Light Source and electronics
6 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,3245 m³
Gross weight 15,55 Kg Net weight 5,65 Kg


Notes
Without pressed-glass diffuser.

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0406



Finishes
04/ _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 2910 lm 121 lm/W

Control
0406 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0406 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Polycarbonate. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.

Light Source and electronics
6 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,2100 m³
Gross weight 13,1 Kg Net weight 5,2 Kg


Notes
Without pressed-glass diffuser.

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0407



Finishes
04/ _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 2910 lm 121 lm/W

Control
0407 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0407 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Polycarbonate. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.

Light Source and electronics
6 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1558 m³
Gross weight 10 Kg Net weight 5,1 Kg


Notes
Without pressed-glass diffuser.

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0408



Finishes
04/ _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 2910 lm 121 lm/W

Control
0408 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0408 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Polycarbonate. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.

Light Source and electronics
6 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1238 m³
Gross weight 8,4 Kg Net weight 5 Kg


Notes
Without pressed-glass diffuser.

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0409



Finishes
● **04/** _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 1940 lm 121 lm/W

Control
0409 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0409 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Polycarbonate. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.


Light Source and electronics
4 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,2100 m³
Gross weight 12,3 Kg Net weight 5,3 Kg

Notes
Without pressed-glass diffuser.
Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0410



Finishes
● **04/** _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 1940 lm 121 lm/W

Control
0410 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0410 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Polycarbonate. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.


Light Source and electronics
4 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,2100 m³
Gross weight 11,8 Kg Net weight 4,8 Kg

Notes
Without pressed-glass diffuser.
Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0411



Finishes
● **04/** _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 1940 lm 121 lm/W

Control
0411 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0411 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Polycarbonate. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.


Light Source and electronics
4 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1558 m³
Gross weight 11,4 Kg Net weight 4,7 Kg

Notes
Without pressed-glass diffuser.
Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0412



Finishes
● **04/** _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 1940 lm 121 lm/W

Control
0412 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0412 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Polycarbonate. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.

Light Source and electronics
4 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1558 m³
Gross weight 11,2 Kg Net weight 4,6 Kg


Notes
Without pressed-glass diffuser.

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0413



Finishes
● **04/** _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 1940 lm 121 lm/W

Control
0413 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0413 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Polycarbonate. Horizontal rods: Steel.
Body: Aluminum Canopy: Steel.

Light Source and electronics
4 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1238 m³
Gross weight 7 Kg Net weight 4,5 Kg

Notes
Without pressed-glass diffuser.

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt



Wireflow Lineal


Design by Arik Levy

Crafted of black, electrical cables and lacquered metal rods, Linear traces an airy, two-dimensional outline that lends it a powerful graphic presence. The slim cables are tipped with LED terminals and can be customised.

Pendants


0320

57 cm




0325

155 cm

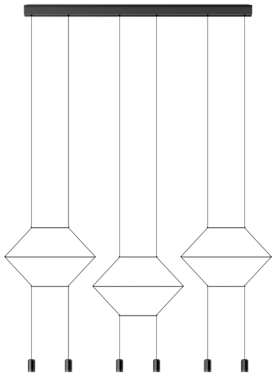


0330

275 cm

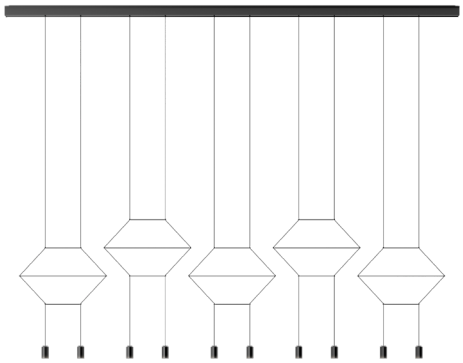


0332

275 cm

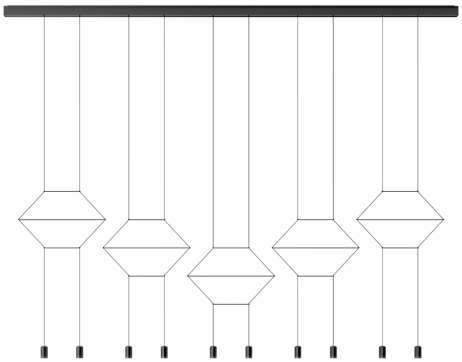


0338

145 cm

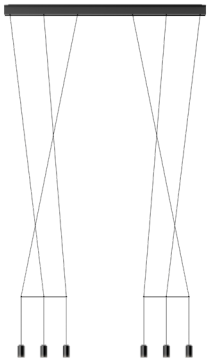

0340

205 cm

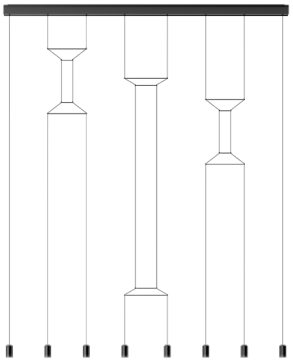


Product specifications subject to change without notice. Please check vibia.com for updated information.

Each project is unique. Visit vibia.com and chose among multiple compositions designed and adapted to your project needs.


Personalise your own Wireflow composition quick and easy at vibia.com



Without pressed-glass diffuser.

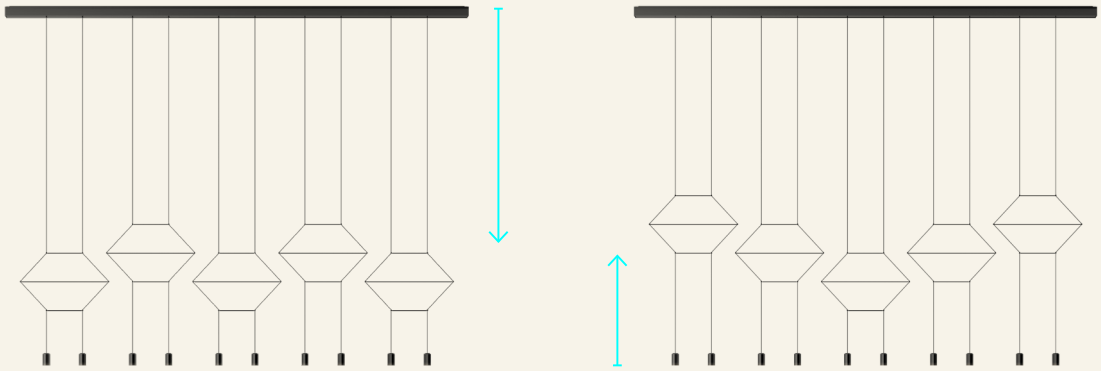

0320



Finishes

04/ _ _ Black
(RAL 9005)

LED temperature colour

/1 _ 2700 K D
CRI >90 970 lm 121 lm/W

/2 _ 3000 K E
CRI >90 970 lm 121 lm/W

/3 _ 3500 K E
CRI >90 1000,6 lm 125,1 lm/W

Control

0320 _ _ **/** _ **1**
DALI

0320 _ _ **/** _ **B**
1-10V, Push

0320 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Horizontal rods: Steel.
Body: Aluminum. Canopy: Aluminum.

Light Source and electronics

2 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging


1 Box 0,20 x 0,075 x 0,70 m
Vol 0,0150 m³
Gross weight 5,1 Kg Net weight 2,6 Kg

Notes

Linear canopy

LED IP20 EAC Bi-volt

0325



Finishes

● **04/** _ _ Black
(RAL 9005)

LED temperature colour

/1 _ 2700 K D
CRI >90 2910 lm 121 lm/W

/2 _ 3000 K E
CRI >90 2910 lm 121 lm/W

/3 _ 3500 K E
CRI >90 3001,8 lm 125,1 lm/W

Control

0325 _ _ **/** _ **1**
DALI

0325 _ _ **/** _ **B**
1-10V, Push

0325 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Horizontal rods: Steel.
Body: Aluminum. Canopy: Aluminum.

Light Source and electronics

6 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging


1 Box 0,20 x 0,075 x 2,30 m
Vol 0,0345 m³
Gross weight 8 Kg Net weight 4,5 Kg

Notes

Linear canopy

LED IP20 CE EAC Bi-volt

0330



Finishes

● **04/** _ _ Black
(RAL 9005)

LED temperature colour

/1 _ 2700 K D
CRI >90 4850 lm 121 lm/W

/2 _ 3000 K E
CRI >90 4850 lm 121 lm/W

/3 _ 3500 K E
CRI >90 5003,0 lm 125,1 lm/W

Control

0330 _ _ **/** _ **1**
DALI

0330 _ _ **/** _ **B**
1-10V, Push

0330 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Horizontal rods: Steel.
Body: Aluminum. Canopy: Aluminum.

Light Source and electronics

10 x LED 4,5 W 700 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging


1 Box 0,20 x 0,075 x 3,30 m
Vol 0,0495 m³
Gross weight 9,5 Kg Net weight 5,0 Kg

Notes

Linear canopy

LED IP20 CE EAC

0332



Finishes

● **04/** _ _ Black
(RAL 9005)

LED temperature colour

/1 _ 2700 K D
CRI >80 4902,7 lm 109 lm/W

Control

0332 _ _ **/** _ **1**
DALI

0332 _ _ **/** _ **B**
1-10V, Push

0332 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Horizontal rods: Steel.
Body: Aluminum. Canopy: Aluminum.

Light Source and electronics

10 x LED 4,5 W 700 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging

1 Box 0,20 x 0,075 x 3,30 m
Vol 0,0345 m³
Gross weight 9,2 Kg Net weight 8,3 Kg

Notes


Linear canopy.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC

Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 | 10 | /1 | A
Model
Finish
LED temperature colour
Control

0338



Finishes
● **04/** _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 2910 lm 121 lm/W
/3 _ 3500 K E
CRI >90 3001,8 lm 125,1 lm/W

Control
0338 _ _ **/** _ **1**
DALI
0338 _ _ **/** _ **B**
1-10V, Push
0338 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Polycarbonate. Horizontal rods: Steel.
Body: Aluminum. Canopy: Aluminum.


Light Source and electronics
6 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
1 Box 0,20 x 0,075 x 3,30 m
Vol 0,0495 m³
Gross weight 9,5 Kg Net weight 5,0 Kg

Notes
Linear canopy

LED IP20 CE EAC Bi-volt

0340



Finishes
● **04/** _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 3922 lm 109 lm/W

Control
0340 _ _ **/** _ **1**
DALI
0340 _ _ **/** _ **B**
1-10V, Push
0340 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Polycarbonate. Horizontal rods: Steel.
Body: Aluminum. Canopy: Aluminum.

Light Source and electronics
8 x LED 4,5 W 700 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
1 Box 0,20 x 0,075 x 2,30 m
Vol 0,0345 m³
Gross weight 10,2 Kg Net weight 9,3 Kg

Notes
Linear canopy.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC




Wireflow FreeForm

Design by Arik Levy

Crafted of lean, electrical cables that trace airy, geometric outlines, Free Form is equal parts light and fluidity. The customisable fixture features endlessly adjustable shapes and heights, LED light points, and a wall or ceiling canopy to suit any space.

Pendants



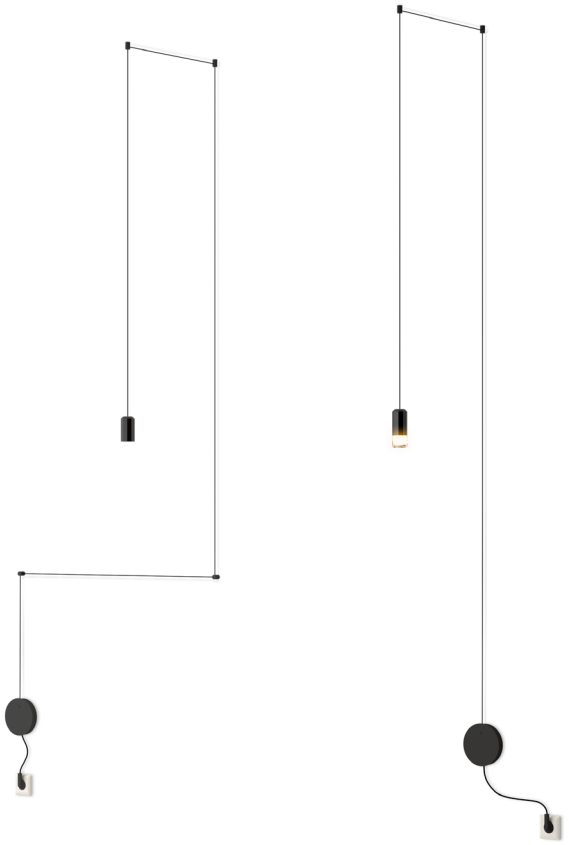

Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 10 /1A _18


Model
Finish
LED temperature colour
Control
Electrical connection
Only for pendants


Each project is unique. Visit vibia.com and chose among multiple compositions designed and adapted to your project needs.

Personalise your own Wireflow composition quick and easy at vibia.com




Pressed-glass diffuser.
*Without pressed-glass diffuser.

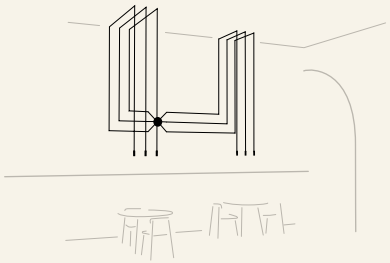

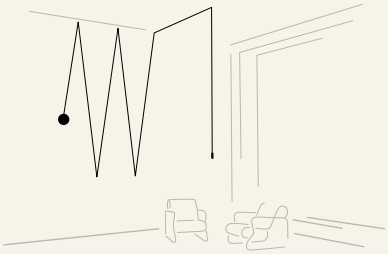



0345



Finishes

04/ _ _ Black
(RAL 9005)

LED temperature colour

/1 _ 2700 K D
CRI >90 485 lm 121 lm/W

/2 _ 3000 K E
CRI >90 485 lm 121 lm/W

/3 _ 3500 K E
CRI >90 500,3 lm 125,1 lm/W

Control

0345 _ _ **/** _ **1**
DALI-2

0345 _ _ **/** _ **B**
1-10V, Push

0345 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Pressed-glass. Body: Aluminum.
Canopy: Steel.

Light Source and electronics

1 x LED 4,5 W 700 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,25 x 0,42 x 0,42 m
Vol 0,0441 m^3
Gross weight 2,6 Kg Net weight 2,34 Kg

Notes


Pressed-glass diffuser.
Extra cable length.

LED IP20 CE EAC Bi-volt

Electrical connection

Surface
_18 Free Wire
_23 Built-in
_31 Remote Micro
for plaster ceilings
_32 Remote XXS
for all types of drop ceilings

0347



Finishes
04/ _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >80 490 lm 109 lm/W

Control
0347 _ _ **/** _ **5**
Push

Materials
Diffuser: Polycarbonate. Body: Aluminum.
Canopy: Steel.


Light Source and electronics
1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,13 x 0,20 x 0,20 m
Vol 0,0055 m³
Gross weight 1,5 Kg Net weight 1,35 Kg

Notes
Electric cable 2,5 m. With plug.
Dimmer push button on the wall plate.
Without pressed-glass diffuser.

LED IP20 CE EAC Bi-volt

0348



Finishes
04/ _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >80 490 lm 109 lm/W

Control
0348 _ _ **/** _ **5**
Push

Materials
Diffuser: Pressed-glass. Body: Aluminum.
Canopy: Steel.


Light Source and electronics
1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0175 m³
Gross weight 1,9 Kg Net weight 1,71 Kg

Notes
Electric cable 2,5 m. With plug.
Dimmer push button on the wall plate.
Without pressed-glass diffuser.

LED IP20 CE EAC Bi-volt

0349



Finishes
04/ _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 970 lm 121 lm/W
/2 _ 3000 K E
CRI >90 970 lm 121 lm/W
/3 _ 3500 K E
CRI >90 1000,6 lm 125,1 lm/W

Control
0349 _ _ **/** _ **A**
DALI-2, 1-10V, Push
0349 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Pressed-glass. Body: Aluminum.
Canopy: Steel.


Light Source and electronics
2 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 4,6 Kg Net weight 4,14 Kg

Notes
Pressed-glass diffuser.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0350



Finishes
04/ _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 1455 lm 121 lm/W
/2 _ 3000 K E
CRI >90 1455 lm 121 lm/W
/3 _ 3500 K E
CRI >90 1500,9 lm 125,1 lm/W

Control
0350 _ _ **/** _ **A**
DALI-2, 1-10V, Push
0350 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Pressed-glass. Body: Aluminum.
Canopy: Steel.


Light Source and electronics
3 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 5,2 Kg Net weight 4,68 Kg

Notes
Pressed-glass diffuser.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0351



Finishes
04/ _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 1940 lm 121 lm/W
/2 _ 3000 K E
CRI >90 1940 lm 121 lm/W
/3 _ 3500 K E
CRI >90 2001,2 lm 125,1 lm/W

Control
0351 _ _ **/** _ **A**
DALI, 1-10V, Push
0351 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Pressed-glass. Body: Aluminum.
Canopy: Steel.


Light Source and electronics
4 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 5,6 Kg Net weight 5,04 Kg

Notes
Pressed-glass diffuser.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0353



Finishes
04/ _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 2425 lm 121 lm/W
/2 _ 3000 K E
CRI >90 2425 lm 121 lm/W
/3 _ 3500 K E
CRI >90 2501,5 lm 125,1 lm/W

Control
0353 _ _ **/** _ **A**
DALI, 1-10V, Push
0353 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Pressed-glass. Body: Aluminum.
Canopy: Steel.


Light Source and electronics
5 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 6,1 Kg Net weight 5,49 Kg

Notes
Pressed-glass diffuser.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0355



Finishes
04/ _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 2910 lm 121 lm/W
/2 _ 3000 K E
CRI >90 2910 lm 121 lm/W
/3 _ 3500 K E
CRI >90 3001,8 lm 125,1 lm/W

Control
0355 _ _ **/** _ **A**
DALI, 1-10V, Push
0355 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Pressed-glass. Body: Aluminum.
Canopy: Steel.


Light Source and electronics
6 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 6,7 Kg Net weight 6,03 Kg

Notes
Pressed-glass diffuser.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0356



Finishes
04/ _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 3395 lm 121 lm/W
/2 _ 3000 K E
CRI >90 3395 lm 121 lm/W
/3 _ 3500 K E
CRI >90 3502,1 lm 125,1 lm/W

Control
0356 _ _ **/** _ **A**
DALI, 1-10V, Push
0356 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Pressed-glass. Body: Aluminum.
Canopy: Steel.


Light Source and electronics
7 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 7,9 Kg Net weight 7,11 Kg

Notes
Pressed-glass diffuser.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0358



Finishes
04/ _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 3880 lm 121 lm/W
/2 _ 3000 K E
CRI >90 3880 lm 121 lm/W
/3 _ 3500 K E
CRI >90 4002,4 lm 125,1 lm/W

Control
0358 _ _ **/** _ **A**
DALI, 1-10V, Push
0358 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Pressed-glass. Body: Aluminum.
Canopy: Steel.

Light Source and electronics
8 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 8,4 Kg Net weight 7,56 Kg

Notes
Pressed-glass diffuser.
UNTIL STOCK RUNS OUT


LED IP20 CE EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 10 /1 A _18

Model
Finish
LED temperature colour
Control
Electrical connection
Only for pendants

0360



Finishes
● **04/** _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 4365 lm 121 lm/W
/2 _ 3000 K E
CRI >90 4365 lm 121 lm/W
/3 _ 3500 K E
CRI >90 4502,7 lm 125,1 lm/W

Control
0360 _ _ **/** _ **A**
DALI, 1-10V, Push
0360 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Pressed-glass. Body: Aluminum.
Canopy: Steel.


Light Source and electronics
9 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 9,1 Kg Net weight 8,19 Kg

Notes
Pressed-glass diffuser.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0361



Finishes
● **04/** _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 485 lm 121 lm/W
/2 _ 3000 K E
CRI >90 485 lm 121 lm/W
/3 _ 3500 K E
CRI >90 500,3 lm 125,10 lm/W

Control
0361 _ _ **/** _ **1**
DALI
0361 _ _ **/** _ **B**
1-10V, Push
0361 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Polycarbonate. Body: Aluminum.
Canopy: Steel.


Light Source and electronics
1 x LED 4,5 W 700 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,25 x 0,42 x 0,42 m
Vol 0,0441 m³
Gross weight 2,6 Kg Net weight 2,34 Kg

Notes
Without pressed-glass diffuser.
Additional cable length personalisation

LED IP20 CE EAC Bi-volt

0362



Finishes
● **04/** _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >80 980 lm 109 lm/W

Control
0362 _ _ **/** _ **A**
DALI-2, 1-10V, Push
0362 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Polycarbonate. Body: Aluminum.
Canopy: Steel.

Light Source and electronics
2 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz


Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 4,6 Kg Net weight 4,14 Kg

Notes
Without pressed-glass diffuser.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

Electrical connection
Surface
_18 Free Wire
_23 Built-in
_31 Remote Micro
for plaster ceilings
_32 Remote XXS
for all types of drop ceilings

0363



Finishes
● **04/** _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >80 1471 lm 109 lm/W

Control
0363 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0363 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Polycarbonate. Body: Aluminum.
Canopy: Steel.


Light Source and electronics
3 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 5,2 Kg Net weight 4,68 Kg

Notes
Without pressed-glass diffuser.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0364



Finishes
● **04/** _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >80 1471 lm 109 lm/W

Control
0364 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0364 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Polycarbonate. Body: Aluminum.
Canopy: Steel.


Light Source and electronics
4 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 5,6 Kg Net weight 5,04 Kg

Notes
Without pressed-glass diffuser.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0365



Finishes
● **04/** _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >80 2451 lm 109 lm/W

Control
0365 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0365 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Polycarbonate. Body: Aluminum.
Canopy: Steel.


Light Source and electronics
5 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 5,04 Kg Net weight 5,49 Kg

Notes
Without pressed-glass diffuser.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0366



Finishes
● **04/** _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >80 2942 lm 109 lm/W

Control
0366 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0366 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Polycarbonate. Body: Aluminum.
Canopy: Steel.

Light Source and electronics
6 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz


Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 6,7 Kg Net weight 6,03 Kg

Notes
Without pressed-glass diffuser.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

0367



Finishes
● **04/** _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >80 3432 lm 109 lm/W

Control
0367 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0367 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Polycarbonate. Body: Aluminum.
Canopy: Steel.


Light Source and electronics
7 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 7,9 Kg Net weight 7,11 Kg

Notes
Without pressed-glass diffuser.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0368



Finishes
● **04/** _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >80 3922 lm 109 lm/W

Control
0368 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0368 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Polycarbonate. Body: Aluminum.
Canopy: Steel.


Light Source and electronics
8 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 8,4 Kg Net weight 7,56 Kg

Notes
Without pressed-glass diffuser.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0369



Finishes
● **04/** _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >80 4412 lm 109 lm/W

Control
0369 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0369 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Polycarbonate. Body: Aluminum.
Canopy: Steel.

Light Source and electronics
9 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz


Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 9,1 Kg Net weight 8,19 Kg

Notes
Without pressed-glass diffuser.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

Composing pendants


Next sketches are composed by one or more compositions

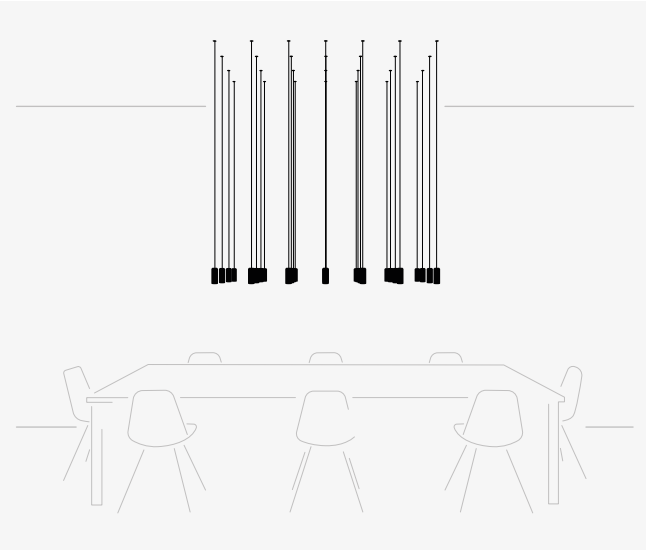


28 x 0361.




28 x 0345.

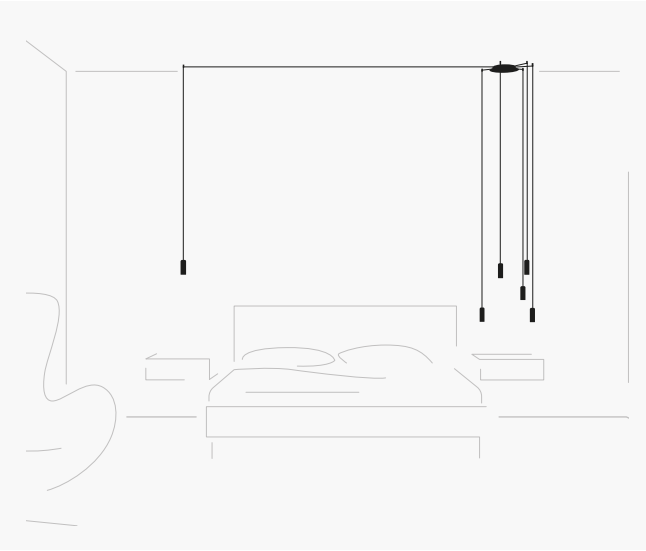


6 x 0345.

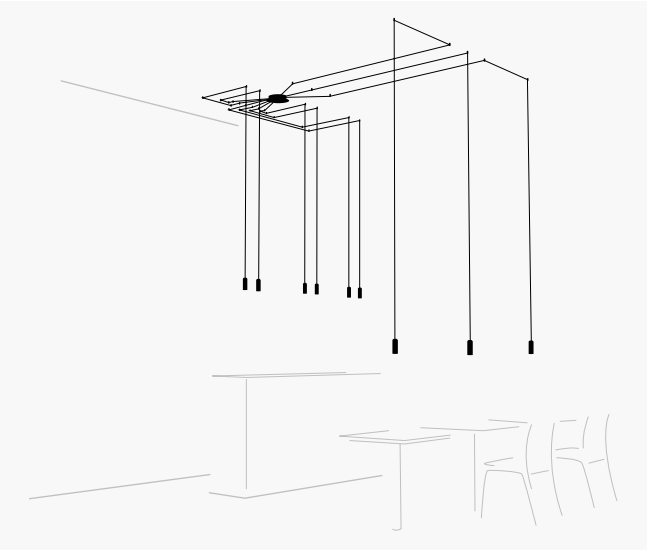


9 x 0361.

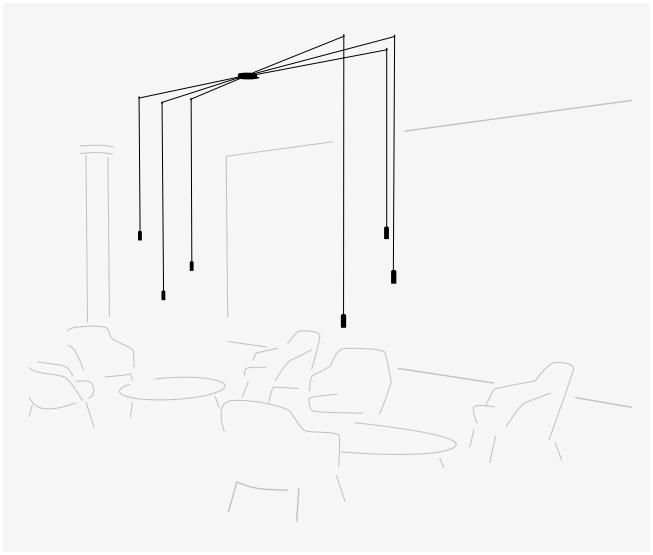


6 x 0361.

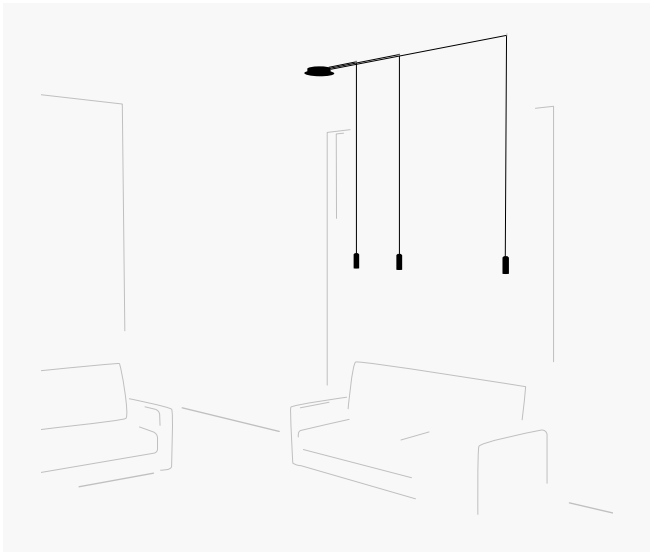

3 x 0361.

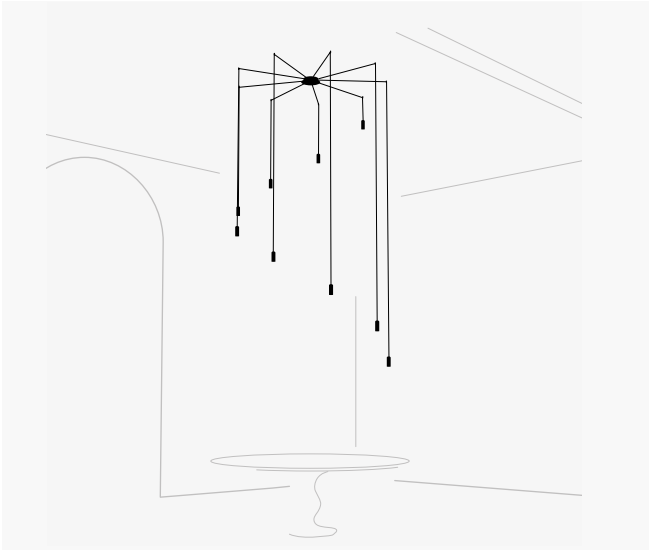


9 x 0345.

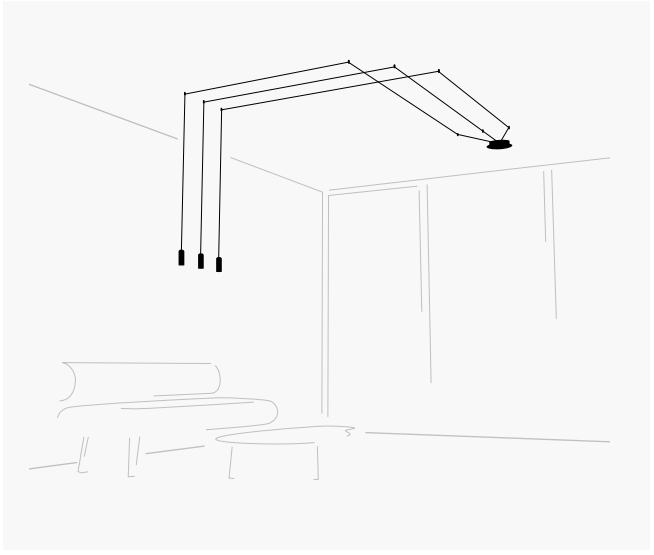

3 x 0361.

Composing pendants


Next sketches are composed by one or more compositions

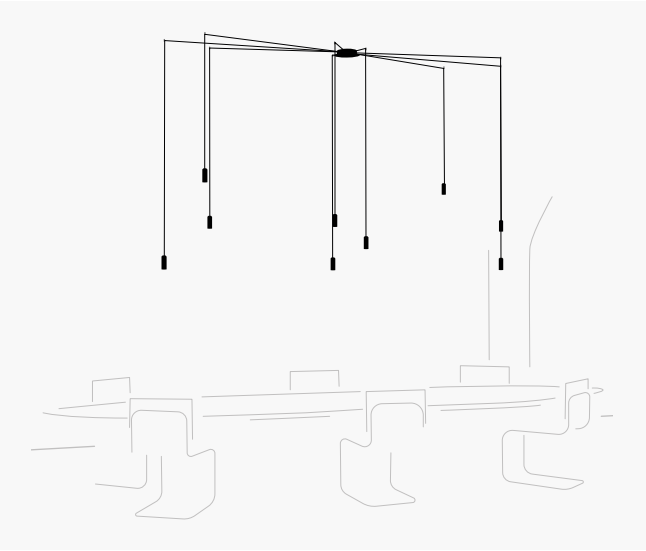

9 x 0361.

Each project is unique. Visit vibia.com and chose among multiple compositions designed and adapted to your project needs.

Personalise your own Wireflow FreeForm composition quick and easy at vibia.com

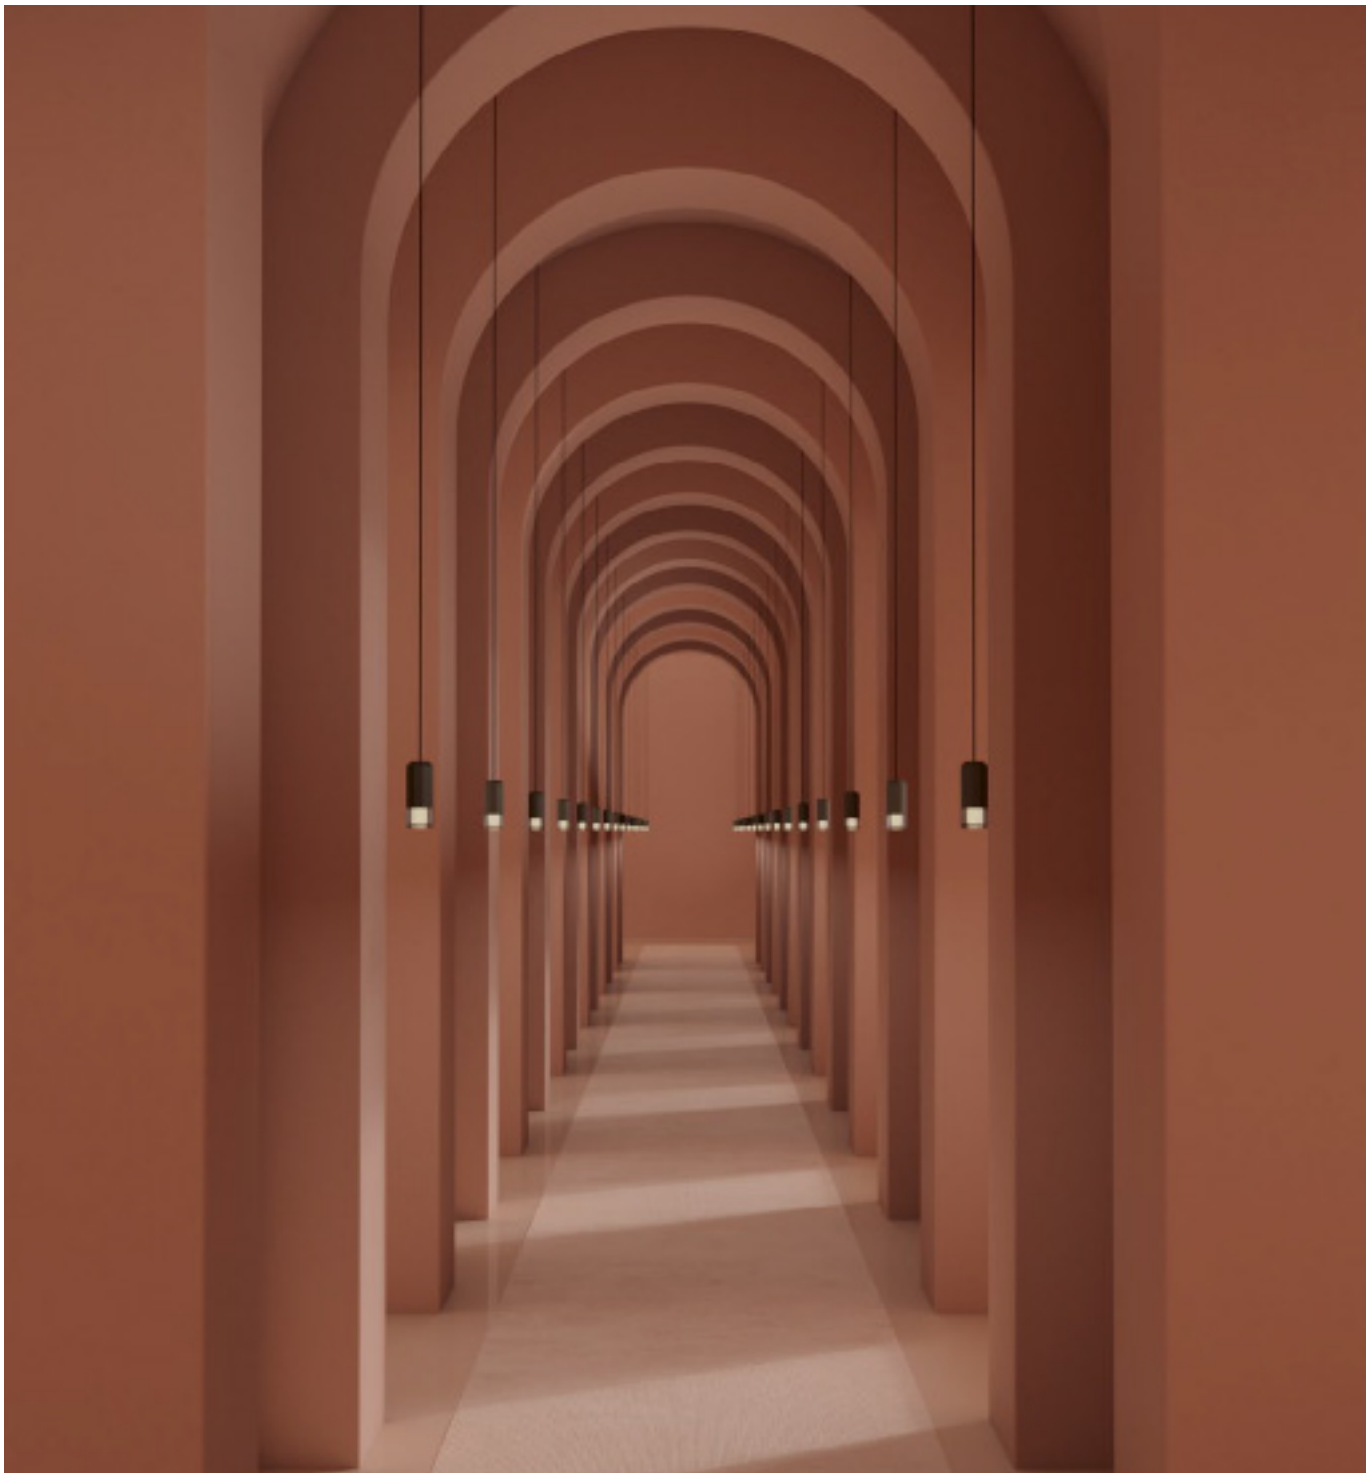

Electrical connection options for models 0345 / 0361

Choose your preferred installation option accordingto your needs.
For each composition, the optimal minimum number of drivers will be delivered.

Drop ceiling

The innovative remote and built-in fittings accentuate the silkiness and lightness of compositions on suspended ceilings, its great visual grandeur taking center stage.

For Ref. 0345 / 0361

Remote



Micro ø 3 cm
height 7 cm
for plaster ceilings. Black finish.





XXS ø 6 cm
height 6 cm
for all types of drop ceilings. Match with fixture finish.

Built-in



ø 8 cm
height 6 cm
match with fixture finish.







Product specifications subject to change without notice. Please check vibia.com for updated information.

Regular ceiling

When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.

For Ref. 0345 / 0361


Surface




ø 20 cm

match with fixture finish.


Free Wire



ø 20 cm





ø 36 cm



ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendants.








Wireflow Chandelier

Design by Arik Levy


Wireflow is a collection of pendant lights that are at once presence and absence. Featuring slender black, electrical cables tipped with LED light terminals, its three-dimensional forms represent a contemporary reinterpretation of the traditional chandelier.

Pendants


0315

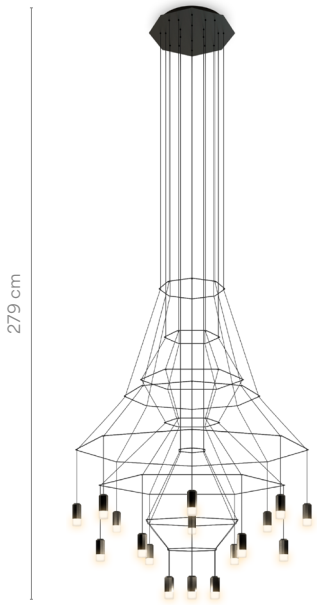


0374

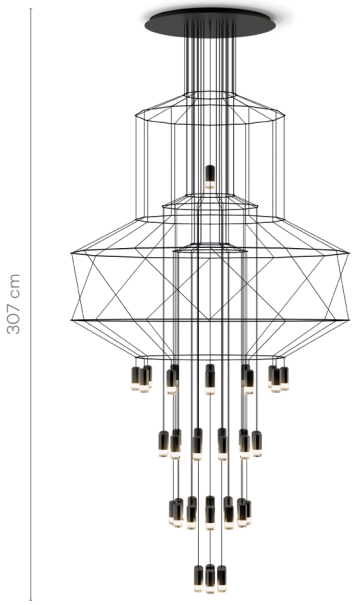


0375

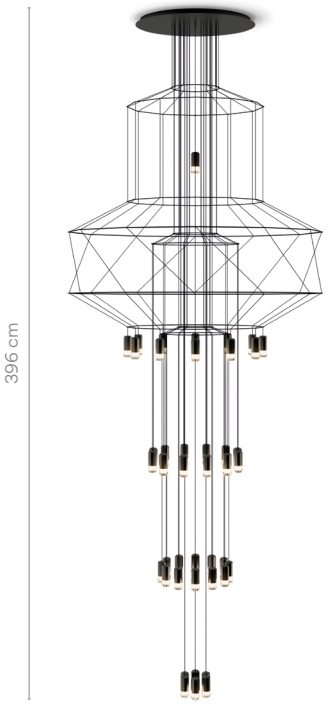


0376

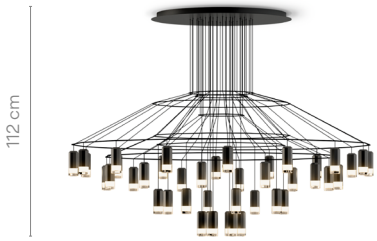

0377

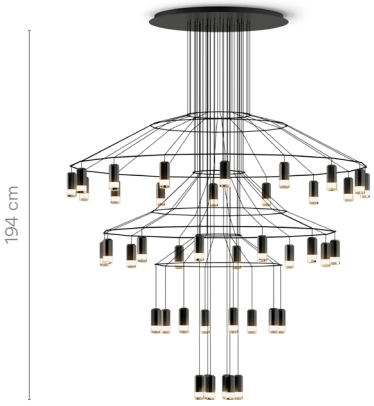


0378

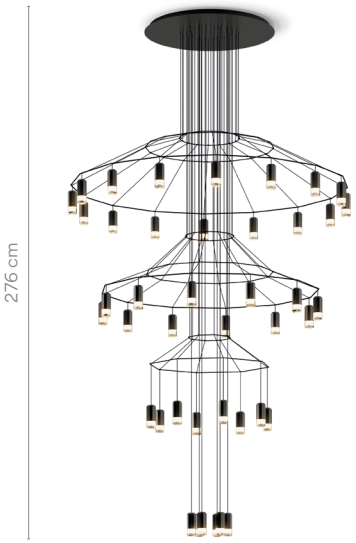



Product specifications subject to change without notice. Please check vibia.com for updated information.

Each project is unique. Visit vibia.com and chose among multiple compositions designed and adapted to your project needs.

Personalise your own Wireflow composition quick and easy at vibia.com

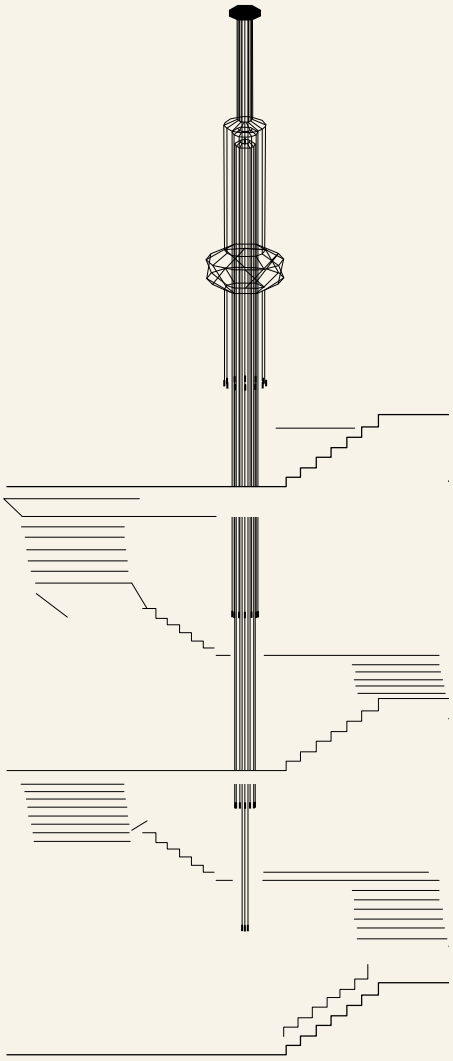

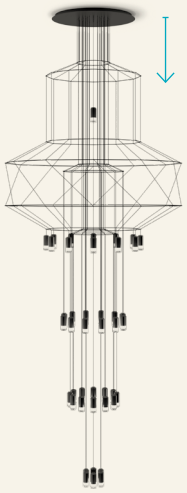


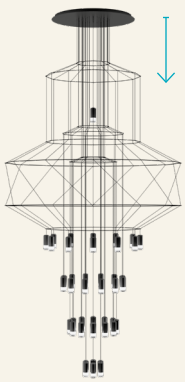

For configurations longer than 9 m, please ask Vibia customer service.



0315

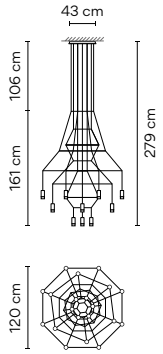

Finishes

● **04/** _ _ Black
(RAL 9005)

LED temperature colour

/1 _ 2700 K D
CRI >90 9700 lm 121 lm/W

/2 _ 3000 K E
CRI >90 9700 lm 121 lm/W

/3 _ 3500 K E
CRI >90 10006,1 lm 125,1 lm/W

Control

0315 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0315 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Pressed-glass. Body: Aluminum.
Canopy and horizontal rods: Steel.

Light Source and electronics

20 x LED 4,5 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,3832 m³
Gross weight 32 Kg Net weight 18 Kg

Notes

Configuration layout at vibia.com

LED IP20 CE EAC Bi-volt

0374

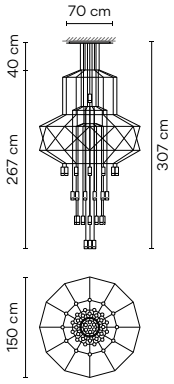

Finishes

● **04/** _ _ Black
(RAL 9005)

LED temperature colour

/1 _ 2700 K D
CRI >90 20855 lm 121 lm/W

/2 _ 3000 K E
CRI >90 20855 lm 121 lm/W

/3 _ 3500 K E
CRI >90 21513,1 lm 125,1 lm/W

Control

0374 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0374 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Pressed-glass. Body: Aluminum.
Canopy and horizontal rods: Steel.

Light Source and electronics

43 x LED 4,5 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,5000 m³
Gross weight 57 Kg Net weight 47 Kg

Notes

Configuration layout at vibia.com

LED IP20 CE EAC Bi-volt

0375

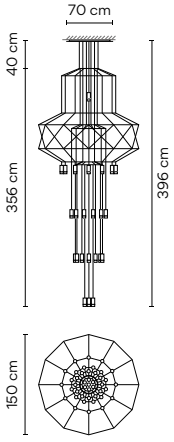

Finishes

● **04/** _ _ Black
(RAL 9005)

LED temperature colour

/1 _ 2700 K D
CRI >90 20855 lm 121 lm/W

/2 _ 3000 K E
CRI >90 20855 lm 121 lm/W

/3 _ 3500 K E
CRI >90 21513,1 lm 125,1 lm/W

Control

0375 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0375 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Pressed-glass. Body: Aluminum.
Canopy and horizontal rods: Steel.

Light Source and electronics

43 x LED 4,5 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,5000 m³
Gross weight 57 Kg Net weight 47 Kg

Notes

Configuration layout at vibia.com

LED IP20 CE EAC Bi-volt

0376



Finishes
04/ _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 20370 lm 121 lm/W
/2 _ 3000 K E
CRI >90 20370 lm 121 lm/W
/3 _ 3500 K E
CRI >90 21012,8 lm 125,1 lm/W

Control
0376 _ _ **/** _ **A**
DALI-2, 1-10V, Push
0376 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Pressed-glass. Body: Aluminum.
Canopy and horizontal rods: Steel.


Light Source and electronics
42 x LED 4,5 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,5000 m³
Gross weight 56 Kg Net weight 46 Kg

Notes
Configuration layout at vibia.com

LED IP20 CE EAC Bi-volt

0377



Finishes
04/ _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 20370 lm 121 lm/W
/2 _ 3000 K E
CRI >90 20370 lm 121 lm/W
/3 _ 3500 K E
CRI >90 21012,8 lm 125,1 lm/W

Control
0377 _ _ **/** _ **A**
DALI-2, 1-10V, Push
0377 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Pressed-glass. Body: Aluminum.
Canopy and horizontal rods: Steel.


Light Source and electronics
42 x LED 4,5 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,5000 m³
Gross weight 56 Kg Net weight 46 Kg

Notes
Configuration layout at vibia.com

LED IP20 CE EAC Bi-volt

0378

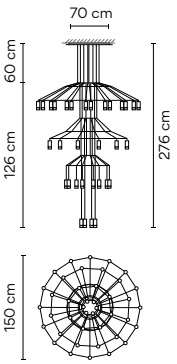

Finishes
04/ _ _ Black
(RAL 9005)

LED temperature colour
/1 _ 2700 K D
CRI >90 20370 lm 121 lm/W
/2 _ 3000 K E
CRI >90 20370 lm 121 lm/W
/3 _ 3500 K E
CRI >90 21012,8 lm 125,1 lm/W

Control
0378 _ _ **/** _ **A**
DALI-2, 1-10V, Push
0378 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Pressed-glass. Body: Aluminum.
Canopy and horizontal rods: Steel.

Light Source and electronics
42 x LED 4,5 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,5000 m³
Gross weight 56 Kg Net weight 46 Kg

Notes
Configuration layout at vibia.com

LED IP20 CE EAC Bi-volt

Big

Design by Lievore, Altherr, Molina

Big breaks new ground in terms of scale and technology, revolutionising the ceiling light fitting.

Ceiling

0530 0532

ø 120 cm




0531 0533

ø 100 cm



0530



Finishes

01 Chrome
(Metallic finish)
93 White
(RAL 9016)

0530 _ _

Materials

Shade: Aluminum. Diffuser: Methacrylate.
Ring: Steel.

Light Source and electronics

2 x 2G11 230V 36 W
2 x 2G11 230V 24 W

Packaging


1 Box 0,38 x 1,37 x 1,37 m
Vol 0,7080 m³
Gross weight 21 Kg Net weight 18,9 Kg

Notes

Easy-to-install and replace bulb system.
UNTIL STOCK RUNS OUT

IP20 CE EAC

0531



Finishes

01 Chrome
(Metallic finish)
93 White
(RAL 9016)

0531 _ _

Materials

Shade: Aluminum. Diffuser: Methacrylate.
Ring: Steel.

Light Source and electronics

2 x 2G11 230V 36 W
2 x 2G11 230V 24 W

Packaging

1 Box 0,34 x 1,14 x 1,14 m
Vol 0,4420 m³
Gross weight 15,2 Kg Net weight 13,68 Kg


Notes

Easy-to-install and replace bulb system.
UNTIL STOCK RUNS OUT

IP20 CE EAC

Product specifications subject to change without notice. Please check vibia.com for updated information.

0532



Finishes

01/ _ _ Chrome
(Metallic finish)

93/ _ _ White
(RAL 9016)

LED temperature colour

/2 _ 3000 K E
CRI >90 8944 lm 132 lm/W

Control

0532 _ _ **/** _ **1**
DALI-2

0532 _ _ **/** _ **B**
1-10V, Push

0532 _ _ **/** _ **Z**
Casambi

Materials

Shade: Aluminum. Diffuser: Methacrylate.
Ring: Steel.

Light Source and electronics

4 x LED Quadrant 18,9 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging


1 Box 0,38 x 1,36 x 1,36 m
Vol 0,7080 m^3
Gross weight 21 Kg Net weight 18,9 Kg

Notes

UNTIL STOCK RUNS OUT

LED IP20 CE EAC

0533



Finishes

01/ _ _ Chrome
(Metallic finish)

93/ _ _ White
(RAL 9016)

LED temperature colour

/2 _ 3000 K E
CRI >90 8944 lm 132 lm/W

Control

0533 _ _ **/** _ **1**
DALI-2

0533 _ _ **/** _ **B**
1-10V, Push

0533 _ _ **/** _ **Z**
Casambi

Materials

Shade: Aluminum. Diffuser: Methacrylate.
Ring: Steel.

Light Source and electronics

4 x LED Quadrant 18,9 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging

1 Box 0,34 x 1,14 x 1,14 m
Vol 0,4420 m^3
Gross weight 15,2 Kg Net weight 13,68 Kg

Notes

UNTIL STOCK RUNS OUT

LED IP20 CE EAC

Easy-to-install and
replace bulb system.



Pendants



ø 120 cm


0530 0532



ø 100 cm

0536 0538

0535

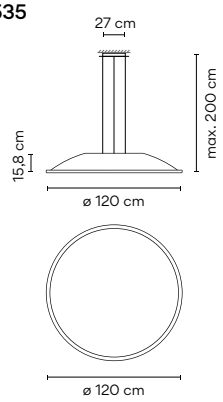

Finishes

01 Chrome
(Metallic finish)
93 White
(RAL 9016)

0535 _ _

Materials

Shade: Aluminum. Diffuser: Methacrylate.
Ring: Steel. Canopy: Steel.

Light Source and electronics

2 x 2G11 230V 36 W
2 x 2G11 230V 24 W

Packaging


1 Box 0,38 x 1,37 x 1,37 m
Vol 0,7080 m^3
Gross weight 25,6 Kg Net weight 23,04 Kg

Notes

Easy-to-install and replace bulb system
Extra cable length.
UNTIL STOCK RUNS OUT

IP20 CE EAC

0536

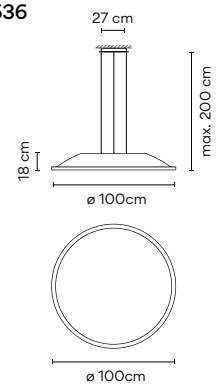

Finishes

01 Chrome
(Metallic finish)
93 White
(RAL 9016)

0536 _ _

Materials

Shade: Aluminum. Diffuser: Methacrylate.
Ring: Steel. Canopy: Steel.

Light Source and electronics

2 x 2G11 230V 36 W
2 x 2G11 230V 24 W

Packaging

1 Box 0,34 x 1,14 x 1,14 m
Vol 0,4420 m^3
Gross weight 19,6 Kg Net weight 17,64 Kg

Notes


Easy-to-install and replace bulb system
Extra cable length.
UNTIL STOCK RUNS OUT

IP20 CE EAC

Product specifications subject to change without notice. Please check vibia.com for updated information.



0537

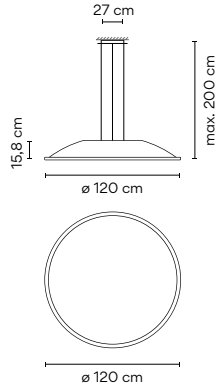

Finishes

01/ _ _ Chrome
(Metallic finish)
93/ _ _ White
(RAL 9016)

LED temperature colour

/2 _ 3000 K E
CRI >90 8944 lm 132 lm/W

Control

0537 _ _ **/** _ **1**
DALI-2

0537 _ _ **/** _ **B**
1-10V, Push

0537 _ _ **/** _ **Z**
Casambi

Materials

Shade: Aluminum. Diffuser: Methacrylate.
Ring: Steel. Canopy: Steel.

Light Source and electronics

4 x LED Quadrant 18,9 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging


1 Box 0,38 x 1,36 x 1,36 m
Vol 0,7080 m^3
Gross weight 25,6 Kg Net weight 23,04 Kg

Notes

Extra cable length.
UNTIL STOCK RUNS OUT

LED IP20 EAC

0538

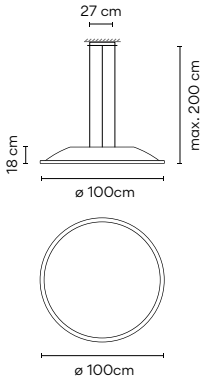

Finishes

01/ _ _ Chrome
(Metallic finish)
93/ _ _ White
(RAL 9016)

LED temperature colour

/2 _ 3000 K C
CRI >90 8944 lm 132 lm/W

Control

0538 _ _ **/** _ **1**
DALI-2

0538 _ _ **/** _ **B**
1-10V, Push

0538 _ _ **/** _ **Z**
Casambi

Materials

Shade: Aluminum. Diffuser: Methacrylate.
Ring: Steel. Canopy: Steel.

Light Source and electronics

4 x LED Quadrant 18,9 W 500mA E
Constant Current 500 mA
220~240V 50/60Hz

Packaging

1 Box 0,38 x 1,36 x 1,36 m
Vol 0,7080 m^3
Gross weight 19,6 Kg Net weight 17,64 Kg

Notes

Extra cable length.
UNTIL STOCK RUNS OUT

LED IP20 EAC

Big Built-in

Design by Lievore, Altherr, Molina

Big reimagines the utilitarian ceiling light with an enlarged diffuser that covers nearly the entire chrome fitting. The simple, oversized shape evokes a glowing orb overhead, its pure, geometric silhouette mimicking the effect of a skylight.

Ceiling

0540

ø 123 cm



0546 0547

ø 36 cm



0543 0544


ø 60 cm



Chrome ring.
Easy-to-install and replace bulb system.



0540



Finishes

01 Chrome
(Metallic finish)

93 White
(RAL 9016)

0540 _ _

Materials

Diffuser: Methacrylate. Built-in body: Aluminum.
Ring: Steel.

Light Source and electronics

2 x G5 230V 24 W (T5)
2 x G5 230V 39 W (T5)
2 x G5 230V 54 W (T5)

Packaging

1 Box 0,38 x 1,37 x 1,37 m
Vol 0,7080 m³
Gross weight 23 Kg Net weight 1 Kg

Notes


Built-in

UNTIL STOCK RUNS OUT

IP20 CE EAC ø 121 cm

Product specifications subject to change without notice. Please check vibia.com for updated information.

0543



Finishes
01 Chrome
(Metallic finish)
93 White
(RAL 9016)

0543 _ _

Materials
Diffuser: Methacrylate. Built-in body: Aluminum.
Ring: Steel.


Light Source and electronics
2 x 2G11 230V 24 W
2 x 2G11 230V 36 W

Packaging
1 Box 0,27 x 0,76 x 0,76 m
Vol 0,1550 m³
Gross weight 7 Kg Net weight 4,50 Kg

Notes
Built-in
UNTIL STOCK RUNS OUT

IP20 CE EAC ø 58,7 cm

0544



Finishes
01 Chrome
(Metallic finish)
93 White
(RAL 9016)

0544 _ _

Materials
Diffuser: Methacrylate. Built-in body: Aluminum.
Ring: Steel.


Light Source and electronics
2 x 2G11 230V 24 W
2 x 2G11 230V 36 W

Packaging
1 Box 0,27 x 0,76 x 0,76 m
Vol 0,1550 m³
Gross weight 8 Kg Net weight 5 Kg

Notes
Built-in
UNTIL STOCK RUNS OUT

IP20 CE EAC ø 58,7 cm

0546



Finishes
01 Chrome
(Metallic finish)
93 White
(RAL 9016)

0546 _ _

Materials
Diffuser: Methacrylate. Built-in body: Aluminum.
Ring: Steel.


Light Source and electronics
1 x 2GX13 230V 55W (T5C)

Packaging
1 Box 0,25 x 0,42 x 0,42 m
Vol 0,0440 m³
Gross weight 2,5 Kg Net weight 2 Kg

Notes
Built-in
UNTIL STOCK RUNS OUT

IP20 CE EAC ø 34 cm

0547



Finishes
01 Chrome
(Metallic finish)
93 White
(RAL 9016)

0547 _ _

Materials
Diffuser: Methacrylate. Built-in body: Aluminum.
Ring: Steel.

Light Source and electronics
1 x 2GX13 230V 55 W (T5C)

Packaging
1 Box 0,25 x 0,42 x 0,42 m
Vol 0,0440 m³
Gross weight 2,5 Kg Net weight 2 Kg

Notes
Built-in
UNTIL STOCK RUNS OUT


IP20 CE EAC ø 34 cm

I.Cono

Design by Lievore, Altherr, Molina

Exuding a poised, Scandinavian presence, I.Cono is distinguished by its signature visor-shaped shade that's sleekly angled for a stylish look. Ideal for precision lighting or reading, its pure and clean design conceals its rotation mechanisms.

Table Floor Wall

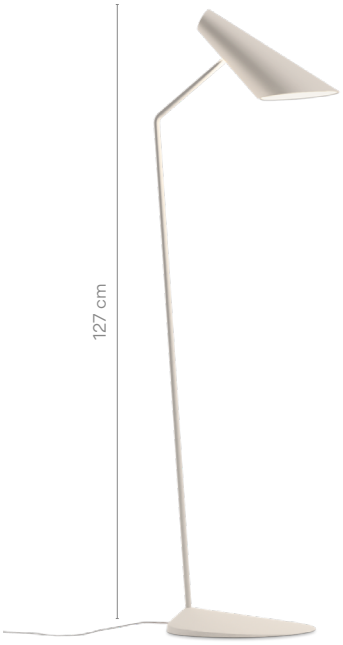

0712




0720



0700

0700



Finishes

- **10** White (NCS S 0300-N)
- **21** Black Grey (NCS S 7000-N)
- **25** Beige D1 (NCS S 4005-G80Y)
- **37** Terra Red (NCS S 4040-Y70R)
- **42** Blue M1 (NCS S 5010-B10G)

LED temperature colour

2700 K 800 lm/W

0700 _ _

Materials

Shade: Polycarbonate. Base: Zamak.
Vertical tube: Steel.

Light Source and electronics

1 x LED E14 230V 7 W

Packaging

1 Box 0,81 x 0,31 x 0,33 m
Vol 0,0828 m^3
Gross weight 5,2 Kg Net weight 3,2 Kg


Notes

Switch on the base.
Electric cable 2 m

IP20 CE EAC

Product specifications subject to change without notice. Please check vibia.com for updated information.

0712



Finishes
- **10** White (NCS S 0300-N)
- **21** Black Grey (NCS S 7000-N)
- **25** Beige D1 (NCS S 4005-G80Y)
- **37** Terra Red (NCS S 4040-Y70R)
- **42** Blue M1 (NCS S 5010-B10G)

LED temperature colour
2700 K 800 lm/W

0712 _ _

Materials
Shade: Polycarbonate. Base: Zamak.
Vertical tube: Steel.


Light Source and electronics
1 x LED E14 230V 7 W

Packaging
1 Box 0,34 x 1,50 x 0,32 m
Vol 0,1632 m³
Gross weight 16 Kg Net weight 11,8 Kg

Notes
Switch on the cable.
Electric cable 1,5 m

IP20 CE EAC

0720



Finishes
- **10** White (NCS S 0300-N)
- **21** Black Grey (NCS S 7000-N)
- **25** Beige D1 (NCS S 4005-G80Y)
- **37** Terra Red (NCS S 4040-Y70R)
- **42** Blue M1 (NCS S 5010-B10G)

LED temperature colour
2700 K 800 lm/W

0720 _ _

Materials
Shade: Polycarbonate.
Wall plate: Zamak.

Light Source and electronics
1 x LED E14 230V 7 W

Packaging
1 Box 0,21 x 0,48 x 0,21 m
Vol 0,0212 m³
Gross weight 2,2 Kg Net weight 1 Kg

Notes
On/off switch on the wall plate

IP20 CE EAC





Algorithm Free


Design by Toan Nguyen

Like a cloud of frozen rain, this collection brings together beauty and geometry. Mathematical order provides a magical harmony with an astonishing range of permutations and compositions. Can be customized to suit any space.


Pendants

*** Built-in version**

0820 *0822

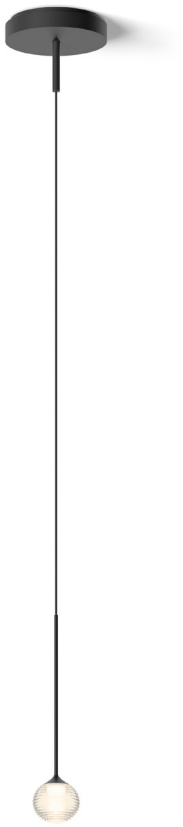

0820



Finishes

18/ _ _ Graphite
(ADAPTA RF9913WX)

93/ _ _ White
(RAL 9016)

LED temperature colour

/1 _ 2700 K E
CRI >90 312,28 lm 90 lm/W

/3 _ 3500 K F
CRI >90 312,3 lm 99,1 lm/W

Control

0820 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0820 _ _ **/** _ **Z**
Casambi

Materials

Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

Light Source and electronics

1 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging

1 Box 0,18 x 0,55 x 0,55 m
Vol 0,0131 m³
Gross weight 2,17 Kg Net weight 1,57 Kg

Notes

Surface.

Extra cable length. **16,00 €/m**

LED IP20 CE EAC Bi-volt

Electrical connection

Surface
_18 Free Wire
_23 Built-in
_31 Remote Micro
for plaster ceilings
_32 Remote XXS
for all types of drop ceilings


Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 10 /1 A _18

Model
Finish
LED temperature colour
Control
Electrical connection
Only for pendants



0822



Finishes

18/ _ _ Graphite
(ADAPTA RF9913WX)

93/ _ _ White
(RAL 9016)

LED temperature colour

/1 _ 2700 K E
CRI >90 312,28 lm 90 lm/W

/3 _ 3500 K F
CRI >90 312,3 lm 99,1 lm/W

Control

0822 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0822 _ _ **/** _ **Z**
Casambi

Materials

Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

Light Source and electronics

1 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging

1 Box 0,18 x 0,55 x 0,55 m
Vol 0,0131 m³
Gross weight 2,17 Kg Net weight 1,57 Kg

Notes

Built-in.

Extra cable length.


UNTIL STOCK RUNS OUT

LED IP20 CE EAC


Bi-volt ø 10,5 cm

Composing pendants


Next sketches are composed by one or more compositions

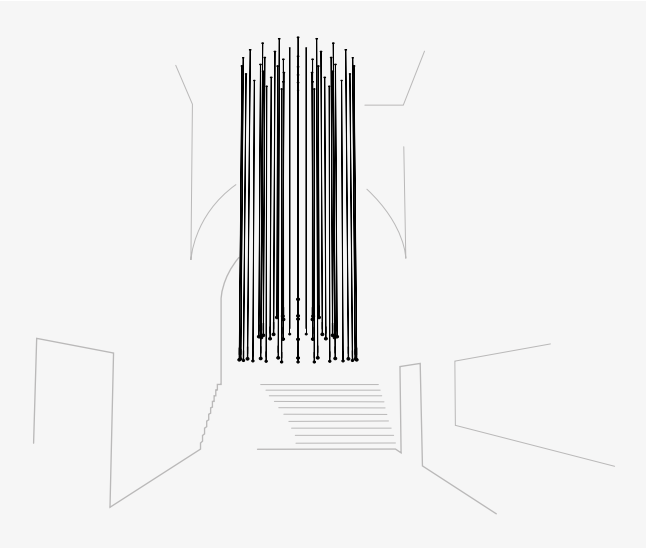

52 x 0820.

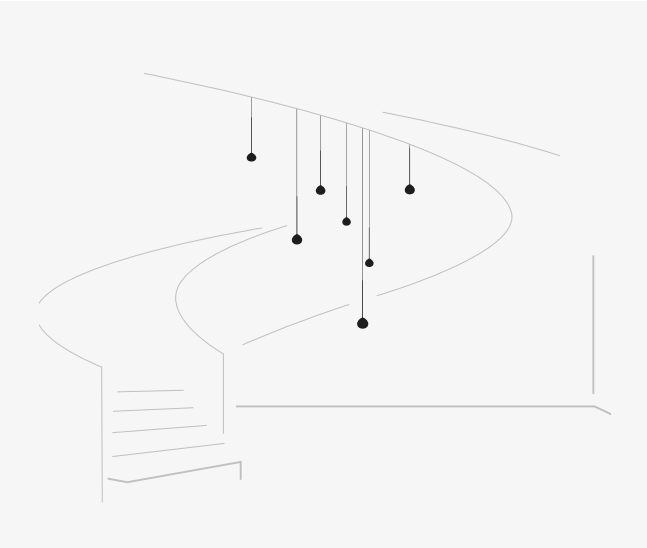

7 x 0820.

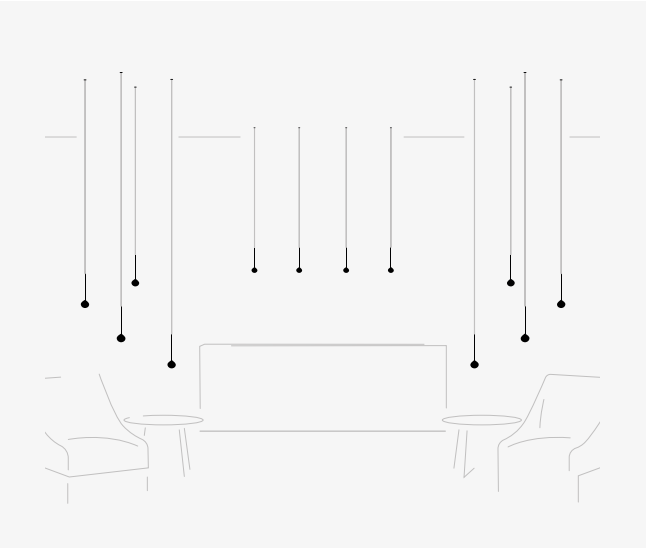

12 x 0820.

Each project is unique. Visit vibia.com and chose among multiple compositions designed and adapted to your project needs.

Personalise your own Algorithm composition quick and easy at vibia.com



Electrical connection options for model 0820

Drop ceiling

The innovative remote and built-in fittings accentuate the silkiness and lightness of compositions on suspended ceilings, its great visual grandeur taking center stage.

For Ref. 0820

Remote



Micro ø 3 cm
height 7 cm
for plaster ceilings. Black finish.





XXS ø 6 cm
height 6 cm
for all types of drop ceilings. Match with fixture finish.

Built-in



ø 8 cm
height 6 cm
match with fixture finish.







Product specifications subject to change without notice. Please check vibia.com for updated information.

Regular ceiling

When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.

For Ref. 0820


Surface




ø 19 cm

match with fixture finish.


Free Wire



ø 22 cm





ø 36 cm



ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendants.







Algorithm Grid

Design by Toan Nguyen

Like a cloud of frozen rain, this collection brings together beauty and geometry. Mathematical order provides a magical harmony with an astonishing range of permutations and compositions. Can be customized to suit any space.


Pendants

*** Built-in version**



75 cm

0825 *0827




89 cm

0880 *0882




160 cm

0885 *0887




123 cm

0830 *0832



214 cm


0835 *0837

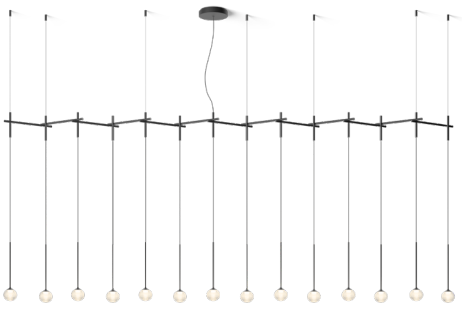

305 cm

0840 *0842

Product specifications subject to change without notice. Please check vibia.com for updated information.



183 cm

0845 *0847




399 cm

0850 *0852



60 cm

0855 *0857




110 cm

0860 *0862




160 cm

0865 *0867




110 cm


0870 *0872





185 cm


0875 *0877

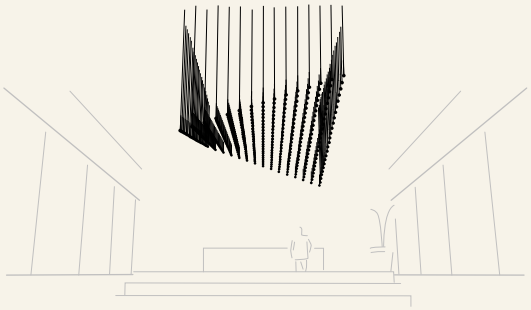

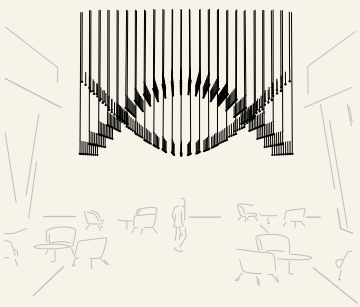

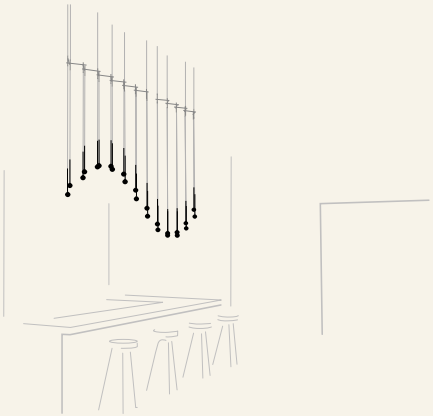

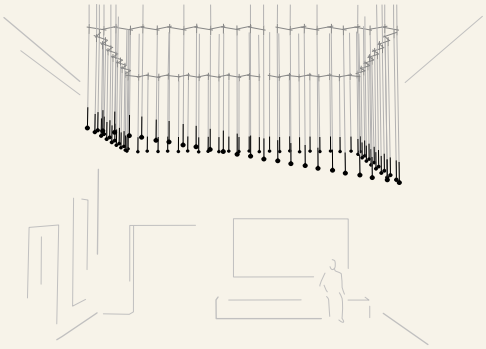


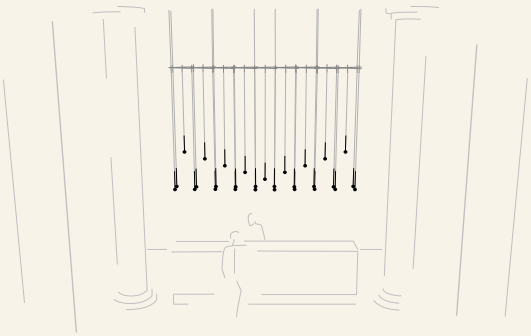




Surface.

Built-in.
11,5 cm Die-cut diameter,
12 cm minimum height in ceiling.

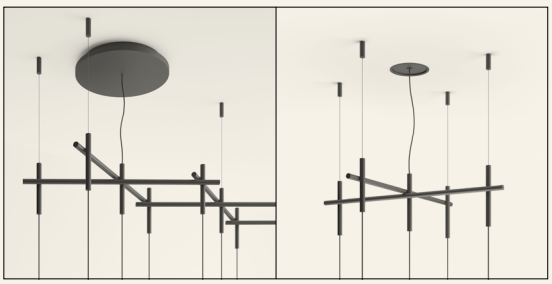

Adjustable cable installation.

Rigid stem installation.
Fixed at 25 cm.

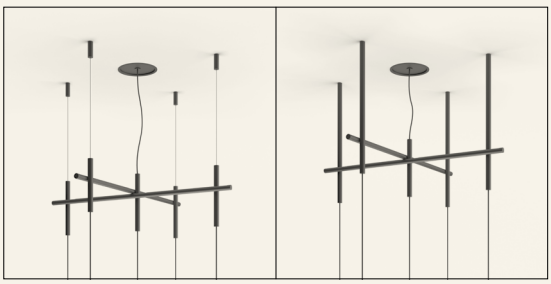


Product specifications subject to change without notice. Please check vibia.com for updated information.

Adjust height of standard model


To personalize luminaire height,
without adjusting diffusers layout.

The steel cables that go from the structure to the ceiling are the only ones that allow the height of the lamp to be adjusted. The installation manual describes how to do this and how to cut the cables.

Personalise your own Algorithm composition quick and easy at vibia.com

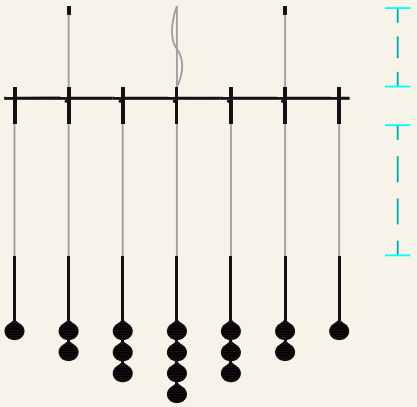

0825



Finishes

18/ _ _ Graphite
(ADAPTA RF9913WX)
93/ _ _ White
(RAL 9016)

LED temperature colour

/1 _ 2700 K F
CRI >90 3122,8 lm 99 lm/W
/3 _ 3500 K F
CRI >90 3122,8 lm 99,1 lm/W

Control

0825 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0825 _ _ **/** _ **Z**
Casambi

Materials

Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

Light Source and electronics

10 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging


2 Boxes
Total Vol. 0,324 m³
Gross weight 15,5 Kg Net weight 10,5 Kg

Notes

Surface

LED IP20 CE EAC Bi-volt

0827



Finishes

18/ _ _ Graphite
(ADAPTA RF9913WX)
93/ _ _ White
(RAL 9016)

LED temperature colour

/1 _ 2700 K F
CRI >90 3122,8 lm 99 lm/W
/3 _ 3500 K F
CRI >90 3122,8 lm 99,1 lm/W

Control

0827 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0827 _ _ **/** _ **Z**
Casambi

Materials

Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

Light Source and electronics

10 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging


2 Boxes
Total Vol. 0,324 m³
Gross weight 15,5 Kg Net weight 10,5 Kg

Notes

Built-in

LED IP20 CE EAC
Bi-volt ø 10,5 cm

0830



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour
- **/1** _ 2700 K F — CRI >90 1873,68 lm 99 lm/W
- **/3** _ 3500 K F — CRI >90 1873,7 lm 99,1 lm/W

Control
- **0830** _ _ **/** _ **A** — DALI-2, 1-10V, Push
- **0830** _ _ **/** _ **Z** — Casambi

Materials
Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.


Light Source and electronics
6 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol. 0,1705 m³
Gross weight 3,5 Kg Net weight 5,8 Kg

Notes
Surface

LED IP20 CE EAC Bi-volt

0832



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour
- **/1** _ 2700 K F — CRI >90 1873,68 lm 99 lm/W
- **/3** _ 3500 K F — CRI >90 1873,7 lm 99,1 lm/W

Control
- **0832** _ _ **/** _ **A** — DALI-2, 1-10V, Push
- **0832** _ _ **/** _ **Z** — Casambi

Materials
Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.


Light Source and electronics
6 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol. 0,1705 m³
Gross weight 3,5 Kg Net weight 5,8 Kg

Notes
Built-in

LED IP20 CE EAC
Bi-volt ø 10,5 cm

0835



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour
- **/1** _ 2700 K F — CRI >90 3122,8 lm 99 lm/W
- **/3** _ 3500 K F — CRI >90 3122,8 lm 99,1 lm/W

Control
- **0835** _ _ **/** _ **A** — DALI-2, 1-10V, Push
- **0835** _ _ **/** _ **Z** — Casambi

Materials
Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

Light Source and electronics
10 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz


Packaging
2 Boxes
Total Vol. 0,3220 m³
Gross weight 15,5 Kg Net weight 10,5 Kg

Notes
Surface

LED IP20 CE EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

0837



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour
- **/1** _ 2700 K F
  CRI >90 3122,8 lm 99 lm/W
- **/3** _ 3500 K F
  CRI >90 3122,8 lm 99,1 lm/W

Control
- **0837** _ _ **/** _ **A**
  DALI-2, 1-10V, Push
- **0837** _ _ **/** _ **Z**
  Casambi

Materials
Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.


Light Source and electronics
10 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol. 0,3220 m³
Gross weight 15,5 Kg Net weight 10,5 Kg

Notes
Built-in

LED IP20 EAC Bi-volt ø 10,5 cm

0840



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour
- **/1** _ 2700 K F
  CRI >90 4371,92 lm 99 lm/W
- **/3** _ 3500 K F
  CRI >90 4371,92 lm 99,1 lm/W

Control
- **0840** _ _ **/** _ **A**
  DALI-2, 1-10V, Push
- **0840** _ _ **/** _ **Z**
  Casambi

Materials
Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.


Light Source and electronics
14 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
3 Boxes
Total Vol. 0,5275 m³
Gross weight 17,3 Kg Net weight 11,3 Kg

Notes
Surface

LED IP20 EAC Bi-volt

0842



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour
- **/1** _ 2700 K F
  CRI >90 4371,92 lm 99 lm/W
- **/3** _ 3500 K F
  CRI >90 4371,92 lm 99,1 lm/W

Control
- **0842** _ _ **/** _ **A**
  DALI-2, 1-10V, Push
- **0842** _ _ **/** _ **Z**
  Casambi

Materials
Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.


Light Source and electronics
14 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
3 Boxes
Total Vol. 0,5275 m³
Gross weight 17,3 Kg Net weight 11,3 Kg

Notes
Built-in

LED IP20 EAC Bi-volt ø 10,5 cm

0845



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour

/1 _ 2700 K F
CRI >90 4371,92 lm 99 lm/W

/3 _ 3500 K F
CRI >90 4371,92 lm 99,1 lm/W

Control

0845 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0845 _ _ **/** _ **Z**
Casambi

Materials

Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

Light Source and electronics

14 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging


2 Boxes
Total Vol. 0,3220 m³
Gross weight 18,3 Kg Net weight 13,3 Kg

Notes

Surface

LED IP20 CE EAC Bi-volt

0847



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour

/1 _ 2700 K F
CRI >90 4371,92 lm 99 lm/W

/3 _ 3500 K F
CRI >90 4371,92 lm 99,1 lm/W

Control

0847 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0847 _ _ **/** _ **Z**
Casambi

Materials

Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

Light Source and electronics

14 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging


2 Boxes
Total Vol. 0,3220 m³
Gross weight 18,3 Kg Net weight 13,3 Kg

Notes

Built-in

LED IP20 CE EAC Bi-volt ø 10,5 cm

0850



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour

/1 _ 2700 K F
CRI >90 9056,12 lm 99 lm/W

/3 _ 3500 K F
CRI >90 9056,12 lm 99,1 lm/W

Control

0850 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0850 _ _ **/** _ **Z**
Casambi

Materials

Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

Light Source and electronics

29 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol. 0,6260 m³
Gross weight 26 Kg Net weight 20 Kg


Notes

Surface

LED IP20 CE Dimmer Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

0852



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour
- **/1** _ 2700 K F
  CRI >90 9056,12 lm 99 lm/W
- **/3** _ 3500 K F
  CRI >90 9056,12 lm 99,1 lm/W

Control
- **0852** _ _ **/** _ **A**
  DALI-2, 1-10V, Push
- **0852** _ _ **/** _ **Z**
  Casambi

Materials
Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.


Light Source and electronics
29 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol. 0,6260 m³
Gross weight 26 Kg Net weight 20 Kg

Notes
Built-in

LED IP20 EAC
Bi-volt ø 10,5 cm

0855



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour
- **/1** _ 2700 K F
  CRI >90 1561,4 lm 99 lm/W
- **/3** _ 3500 K G
  CRI >90 1130,4 lm 71,8 lm/W

Control
- **0855** _ _ **/** _ **A**
  DALI-2, 1-10V, Push
- **0855** _ _ **/** _ **Z**
  Casambi

Materials
Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.


Light Source and electronics
5 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol. 0,115 m³
Gross weight 8,5 Kg Net weight 5,8 Kg

Notes
Surface.
UNTIL STOCK RUNS OUT

LED IP20 EAC
Dimmer Bi-volt

0857



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour
- **/1** _ 2700 K F
  CRI >90 1561,4 lm 99 lm/W
- **/3** _ 3500 K G
  CRI >90 1130,4 lm 71,8 lm/W

Control
- **0857** _ _ **/** _ **A**
  DALI-2, 1-10V, Push
- **0857** _ _ **/** _ **Z**
  Casambi

Materials
Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.


Light Source and electronics
5 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol. 0,115 m³
Gross weight 8,5 Kg Net weight 5,8 Kg

Notes
Built-in.
UNTIL STOCK RUNS OUT

LED IP20 EAC
Bi-volt ø 10,5 cm

0860



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour

/1 _ 2700 K F
CRI >90 4059,64 lm 99 lm/W

/3 _ 3500 K F
CRI >90 4059,64 lm 99,1 lm/W

Control

0860 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0860 _ _ **/** _ **Z**
Casambi

Materials

Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

Light Source and electronics

13 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging


2 Boxes
Total Vol. 0,3290 m^3
Gross weight 17,35 Kg Net weight 11,85 Kg

Notes

Surface

LED IP20 CE EAC Bi-volt

0862



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour

/1 _ 2700 K F
CRI >90 4059,64 lm 99 lm/W

/3 _ 3500 K F
CRI >90 4059,64 lm 99,1 lm/W

Control

0862 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0862 _ _ **/** _ **Z**
Casambi

Materials

Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

Light Source and electronics

13 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging


2 Boxes
Total Vol. 0,3290 m^3
Gross weight 17,35 Kg Net weight 11,85 Kg

Notes

Built-in

LED IP20 CE EAC
Bi-volt ø 10,5 cm

0865



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour

/1 _ 2700 K F
CRI >90 7807 lm 99 lm/W

/3 _ 3500 K F
CRI >90 7807 lm 99,1 lm/W

Control

0865 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0865 _ _ **/** _ **Z**
Casambi

Materials

Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

Light Source and electronics

25 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol. 0,7280 m^3
Gross weight 25,25 Kg Net weight 20,25 Kg


Notes

Surface

LED IP20 CE EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

0867



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour
- **/1** _ 2700 K F
  CRI >90 7807 lm 99 lm/W
- **/3** _ 3500 K F
  CRI >90 7807 lm 99,1 lm/W

Control
- **0867** _ _ **/** _ **A**
  DALI-2, 1-10V, Push
- **0867** _ _ **/** _ **Z**
  Casambi

Materials
Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.


Light Source and electronics
25 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol. 0,7280 m³
Gross weight 25,25 Kg Net weight 20,25 Kg

Notes
Built-in

LED IP20 CE EAC Bi-volt ø 10,5 cm

0870



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour
- **/1** _ 2700 K F
  CRI >90 4684,2 lm 99 lm/W
- **/3** _ 3500 K F
  CRI >90 4684,2 lm 99,1 lm/W

Control
- **0870** _ _ **/** _ **A**
  DALI-2, 1-10V, Push
- **0870** _ _ **/** _ **Z**
  Casambi

Materials
Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.


Light Source and electronics
15 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol. 0,2679 m³
Gross weight 18,25 Kg Net weight 13,75 Kg

Notes
Surface

LED IP20 CE EAC Bi-volt

0872



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour
- **/1** _ 2700 K F
  CRI >90 4684,2 lm 99 lm/W
- **/3** _ 3500 K F
  CRI >90 4684,2 lm 99,1 lm/W

Control
- **0872** _ _ **/** _ **A**
  DALI-2, 1-10V, Push
- **0872** _ _ **/** _ **Z**
  Casambi

Materials
Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.


Light Source and electronics
15 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol. 0,2679 m³
Gross weight 18,25 Kg Net weight 13,75 Kg

Notes
Built-in

LED IP20 CE EAC Bi-volt ø 10,5 cm

0875



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour

/1 _ 2700 K F
CRI >90 7494,72 lm 99 lm/W

/3 _ 3500 K F
CRI >90 7494,72 lm 99,1 lm/W

Control

0875 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0875 _ _ **/** _ **Z**
Casambi

Materials

Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

Light Source and electronics

24 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging


2 Boxes
Total Vol. 0,4500 m³
Gross weight 30,1 Kg Net weight 22,1 Kg

Notes

Surface

LED IP20 CE EAC Bi-volt

0877



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour

/1 _ 2700 K F
CRI >90 7494,72 lm 99 lm/W

/3 _ 3500 K F
CRI >90 7494,72 lm 99,1 lm/W

Control

0877 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0877 _ _ **/** _ **Z**
Casambi

Materials

Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

Light Source and electronics

24 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging


2 Boxes
Total Vol. 0,4500 m³
Gross weight 30,1 Kg Net weight 22,1 Kg

Notes

Built-in

LED IP20 CE EAC
Bi-volt ø 10,5 cm

0880



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour

/1 _ 2700 K F
CRI >90 3747,4 lm 99 lm/W

/3 _ 3500 K G
CRI >90 2712,9 lm 71,8 lm/W

Control

0880 _ _ **/** _ **A**
DALI-2, 1-10V, Push

0880 _ _ **/** _ **Z**
Casambi

Materials

Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

Light Source and electronics

12 x LED 3,15W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol. 0,3290 m³
Gross weight 16,5 Kg Net weight 11,4 Kg


Notes

Surface.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

0882



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour
- **/1** _ 2700 K F — CRI >90 3747,4 lm 99 lm/W
- **/3** _ 3500 K G — CRI >90 2712,9 lm 71,8 lm/W

Control
- **0882** _ _ **/** _ **A** — DALI-2, 1-10V, Push
- **0882** _ _ **/** _ **Z** — Casambi

Materials
Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.


Light Source and electronics
12 x LED 3,15W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol. 0,3290 m³
Gross weight 16,5 Kg Net weight 11,4 Kg

Notes
Built-in.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt ø 10,5 cm

0885

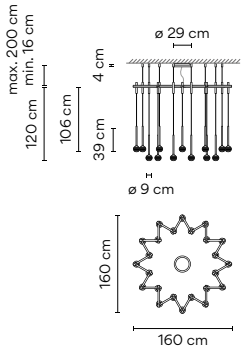

Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour
- **/1** _ 2700 K F — CRI >90 7494,7 lm 99 lm/W
- **/3** _ 3500 K G — CRI >90 5425,9 lm 71,8 lm/W

Control
- **0885** _ _ **/** _ **A** — DALI-2, 1-10V, Push
- **0885** _ _ **/** _ **Z** — Casambi

Materials
Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.


Light Source and electronics
24 x LED 3,15W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol. 0,7280 m³
Gross weight 25,25 Kg Net weight 20,25 Kg

Notes
Surface.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0887

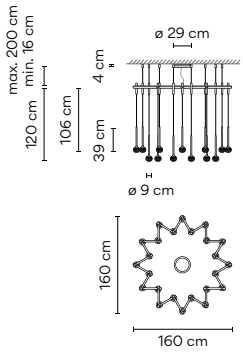

Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour
- **/1** _ 2700 K F — CRI >90 7494,7 lm 99 lm/W
- **/3** _ 3500 K G — CRI >90 5425,9 lm 71,8 lm/W

Control
- **0887** _ _ **/** _ **A** — DALI-2, 1-10V, Push
- **0887** _ _ **/** _ **Z** — Casambi

Materials
Ball: Blowed glass. Glass fixation: Aluminum.
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

Light Source and electronics
24 x LED 3,15W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol. 0,7280 m³
Gross weight 25,25 Kg Net weight 20,25 Kg

Notes
Built-in.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt ø 10,5 cm

Slim

Design by Jordi Vilardell

Elegant and magical, like drops of light falling from the sky, Slim's long, slender strands are suspended by fibre cords to draw the eye upwards.

Pendants

0916

ø 40 cm



0917

ø 28 cm



0935

ø 69 cm



0937

53 x 26 cm



0920

ø 16 cm ø 16 cm



0925

ø 10 cm

0931

24 x 24 cm




0933

38 x 24 cm



0940


ø 100 cm

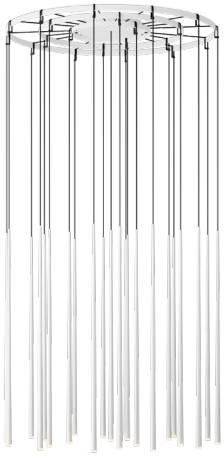

Product specifications subject to change without notice. Please check vibia.com for updated information.



0916



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)
- **68/** _ _ Ocre (NCS S 3050-Y30R)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

- **/1** _ 2700 K F
  CRI >90 1268,54 lm 86 lm/W
- **/2** _ 3000 K G
  CRI >80 1142,4 lm 78 lm/W
- **/3** _ 3500 K F
  CRI >90 1453,5 lm 98,9 lm/W

Control

- **0916** _ _ / _ **1**
  DALI
- **0916** _ _ / _ **B**
  1-10V, Push
- **0916** _ _ / _ **Z**
  Casambi

Materials

Diffuser: Glass. Body: Fiberglass / Carbon fiber.
Canopy Plate: Steel.

Light Source and electronics

7 x LED 2,1 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,22 x 0,48 x 1,20 m
Vol 0,1278 m³
Gross weight 13 Kg Net weight 9,6 Kg

Notes


Surface

Extra cable length.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0917



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)
- **68/** _ _ Ocre (NCS S 3050-Y30R)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

- **/1** _ 2700 K F
  CRI >90 724,88 lm 86 lm/W
- **/2** _ 3000 K G
  CRI >80 652,8 lm 78 lm/W
- **/3** _ 3500 K F
  CRI >90 830,6 lm 98,9 lm/W

Control

- **0917** _ _ / _ **1**
  DALI
- **0917** _ _ / _ **B**
  1-10V, Push
- **0917** _ _ / _ **Z**
  Casambi

Materials

Diffuser: Glass. Body: Fiberglass / Carbon fiber.
Canopy Plate: Steel.

Light Source and electronics

4 x LED 2,1 W 700mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,22 x 0,48 x 1,20 m
Vol 0,1278 m³
Gross weight 8 Kg Net weight 5,2 Kg

Notes

Surface

Extra cable length.


UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

1160 10 /1 A _18

Model
Finish
LED temperature colour
Control
Electrical connection
Only for pendants

0920



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)
- **68/** _ _ Ocre (NCS S 3050-Y30R)

Finish customization (Available options: Vibia colour palette)

LED temperature colour

- **/1** _ 2700 K F — CRI >90 181,22 lm 86 lm/W
- **/2** _ 3000 K G — CRI >80 163,2 lm 78 lm/W
- **/3** _ 3500 K F — CRI >90 207,6 lm 98,9 lm/W

Control

- **0920** _ _ **/** _ **0** — On/ Off
- **0920** _ _ **/** _ **1** — DALI
- **0920** _ _ **/** _ **B** — 1-10V, Push
- **0920** _ _ **/** _ **Z** — Casambi

Materials

Diffuser: Glass. Body: Fiberglass / Carbon fiber.
Canopy Plate: Steel.

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

1 Box 0,07 x 0,19 x 1,20 m
Vol 0,0155 m³
Gross weight 2,14 Kg Net weight 1,2 Kg


Notes

Surface

Extra cable length.

LED · IP20 · CE · EAC · Bi-volt

0925



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)
- **68/** _ _ Ocre (NCS S 3050-Y30R)

Finish customization (Available options: Vibia colour palette)

LED temperature colour

- **/1** _ 2700 K F — CRI >90 181,22 lm 86 lm/W
- **/2** _ 3000 K G — CRI >80 163,2 lm 78 lm/W
- **/3** _ 3500 K F — CRI >90 207,6 lm 98,9 lm/W

Control

- **0925** _ _ **/** _ **0** — On/ Off
- **0925** _ _ **/** _ **1** — DALI
- **0925** _ _ **/** _ **B** — 1-10V, Push
- **0925** _ _ **/** _ **Z** — Casambi

Materials

Diffuser: Glass. Body: Fiberglass / Carbon fiber.
Canopy Plate: Steel.

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

1 Box 0,17 x 0,19 x 1,21 m
Vol 0,0370 m³
Gross weight 2,48 Kg Net weight 1,35 Kg

Notes

Built-in

Extra cable length.


UNTIL STOCK RUNS OUT

LED · IP20 · CE · EAC · Bi-volt

Electrical connection

- Surface
- **_18** Free Wire
- **_23** Built-in
- **_31** Remote Micro — for plaster ceilings
- **_32** Remote XXS — for all types of drop ceilings

0931



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)
- **68/** _ _ Ocre (NCS S 3050-Y30R)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

- **/1** _ 2700 K F
  CRI >90 724,88 lm 86 lm/W
- **/2** _ 3000 K G
  CRI >80 652,8 lm 78 lm/W
- **/3** _ 3500 K F
  CRI >90 830,6 lm 98,9 lm/W

Control

0931 _ _ / _ **1**
DALI

0931 _ _ / _ **B**
1-10V, Push

0931 _ _ / _ **Z**
Casambi

Materials

Diffuser: Glass. Body: Fiberglass / Carbon fiber.
Canopy Plate: Steel.

Light Source and electronics

4 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

1 Box 0,22 x 0,48 x 1,20 m
Vol 0,1267 m³
Gross weight 8 Kg Net weight 5,2 Kg

Notes


Surface

Extra cable length.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0933



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)
- **68/** _ _ Ocre (NCS S 3050-Y30R)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

- **/1** _ 2700 K F
  CRI >90 1087,32 lm 86 lm/W
- **/2** _ 3000 K G
  CRI >80 979,2 lm 78 lm/W
- **/3** _ 3500 K F
  CRI >90 1245,9 lm 98,9 lm/W

Control

0933 _ _ / _ **1**
DALI

0933 _ _ / _ **B**
1-10V, Push

0933 _ _ / _ **Z**
Casambi

Materials

Diffuser: Glass. Body: Fiberglass / Carbon fiber.
Canopy Plate: Steel.

Light Source and electronics

6 x LED 2,1 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,22 x 0,48 x 1,20 m
Vol 0,1267 m³
Gross weight 12,5 Kg Net weight 9,1 Kg

Notes

Surface


Extra cable length.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

0935



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)
- **68/** _ _ Ocre (NCS S 3050-Y30R)

Finish customization (Available options: Vibia colour palette)

LED temperature colour

- **/1** _ 2700 K F — CRI >90 954,5 lm 95 lm/W
- **/2** _ 3000 K F — CRI >80 1140 lm 114 lm/W
- **/3** _ 3500 K F — CRI >90 1093,7 lm 109,4 lm/W

Control

- **0935** _ _ **/** _ **1** — DALI-2
- **0935** _ _ **/** _ **B** — 1-10V, Push
- **0935** _ _ **/** _ **Z** — Casambi

Materials

Diffuser: Glass. Body: Fiberglass / Carbon fiber.
Canopy Plate: Steel.

Light Source and electronics

10 x LED 1 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 1,14 x 1,14 x 0,34 m
Vol 0,4410 m³
Gross weight 19,2 Kg Net weight 14,2 Kg

Notes


Surface

Extra cable length.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

0937



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)
- **68/** _ _ Ocre (NCS S 3050-Y30R)

Finish customization (Available options: Vibia colour palette)

LED temperature colour

- **/1** _ 2700 K F — CRI >90 2355,86 lm 86 lm/W
- **/2** _ 3000 K G — CRI >80 2121,6 lm 78 lm/W
- **/3** _ 3500 K F — CRI >90 2699,4 lm 98,9 lm/W

Control

- **0937** _ _ **/** _ **1** — DALI-2
- **0937** _ _ **/** _ **A** — DALI, 1-10V, Push
- **0937** _ _ **/** _ **Z** — Casambi

Materials

Diffuser: Glass. Body: Fiberglass / Carbon fiber.
Canopy Plate: Steel.

Light Source and electronics

13 x LED 2,1W 700mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,22 x 0,48 x 1,20 m
Vol 0,1267 m³
Gross weight 12,5 Kg Net weight 18,46 Kg

Notes

Surface


Extra cable length.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

1160 | 10 | /1 | A
Model | Finish | LED temperature colour | Control

0940



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)
- **68/** _ _ Ocre (NCS S 3050-Y30R)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K F
CRI >90 2099,9 lm 95 lm/W

/2 _ 3000 K F
CRI >80 2508 lm 114 lm/W

/3 _ 3500 K F
CRI >90 2406,1 lm 109,4 lm/W

Control

0940 _ _ **/** _ **1**
DALI

0940 _ _ **/** _ **B**
1-10V, Push

0940 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Glass. Body: Fiberglass / Carbon fiber.
Canopy Plate: Steel.

Light Source and electronics

22 x LED 1 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 1,14 x 1,14 x 0,34 m
Vol 0,4420 m³
Gross weight 29,9 Kg Net weight 21,9 Kg

Notes

Surface

Extra cable length.

UNTIL STOCK RUNS OUT


LED IP20 CE EAC Bi-volt




Product specifications subject to change without notice. Please check vibia.com for updated information.

Composing pendants


Next sketches are composed by one or more compositions

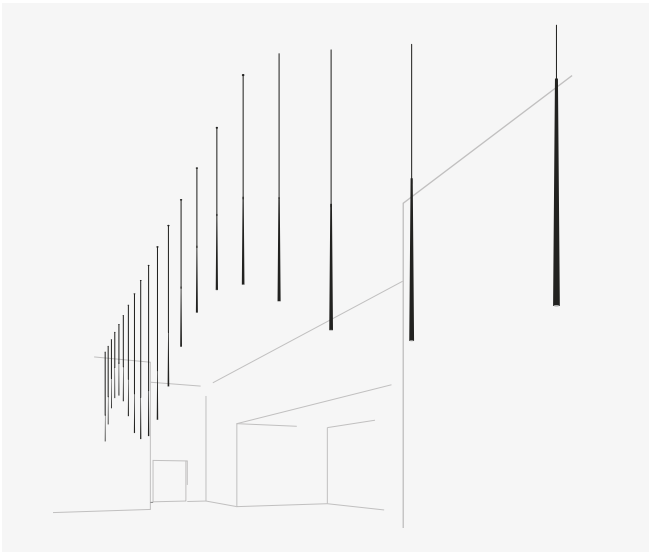

22 x 0920.

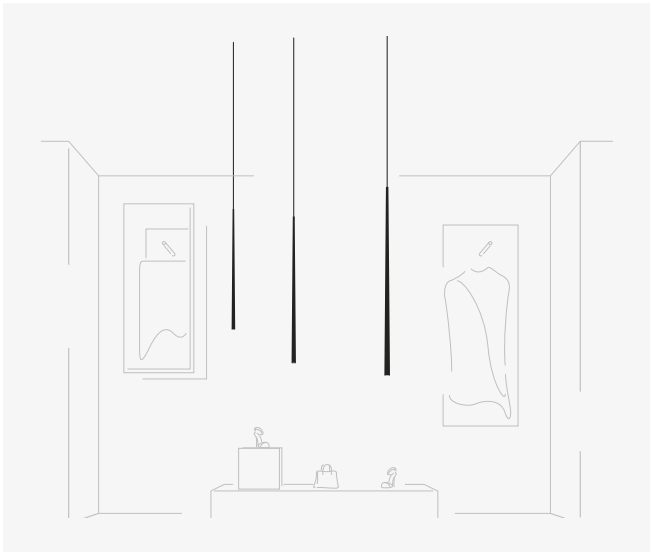

3 x 0920.

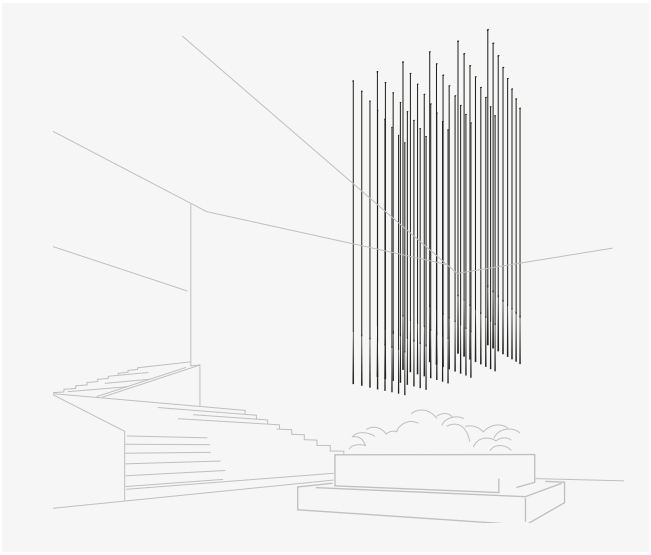

40 x 0920.

Each project is unique. Visit vibia.com and chose among multiple compositions designed and adapted to your project needs.

Personalise your own Slim composition quick and easy at vibia.com

Electrical connection options for models 0920

Choose your preferred installation option accordingto your needs.
For each composition, the optimal minimum number of drivers will be delivered.

Drop ceiling

The innovative remote and built-in fittings accentuate the silkiness and lightness of compositions on suspended ceilings, its great visual grandeur taking center stage.

For Ref. 0920 _ _ /10 / 0920 _ _ /1B

Remote



Micro ø 3 cm
height 7 cm
for plaster ceilings. Black finish.





XXS ø 6 cm
height 6 cm
for all types of drop ceilings. Match with fixture finish.

Built-in



ø 8 cm
height 6 cm
match with fixture finish.







Product specifications subject to change without notice. Please check vibia.com for updated information.

Regular ceiling

When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.

For Ref. 0920_ _ /10


Surface




ø 17,3 cm

match with fixture finish.


Free Wire



ø 20 cm



ø 36 cm



ø 40 cm

For Ref. 0920_ _ /1B / -1 / -Z


Surface




ø 20 cm

match with fixture finish.


Free Wire



ø 20 cm





ø 36 cm



ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendants.





Quadra Ice

Classic and timeless silhouette.
Minimal presence. Integrates readily.

Ceiling


1128 1138



1134



1128



Finishes
00 White glass
(RAL 9016)

1128 00

Materials
Ceiling support: Steel. Diffuser: Glass.


Light Source and electronics
1 x R7s 80mm 230V 120 W Eco Max

Packaging
1 Box 0,21 x 0,41 x 0,41 m
Vol 0,0353 m³
Gross weight 2,24 Kg Net weight 1,44 Kg

Notes
UNTIL STOCK RUNS OUT

IP20 CE EAC Bi-volt

1134



Finishes
00 White glass
(RAL 9016)

1134 00

Materials
Ceiling support: Steel. Diffuser: Glass.

Light Source and electronics
1 x R7s 117mm 230V 230 W Eco Max.


Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 6,2 Kg Net weight 4,2 Kg

Notes
UNTIL STOCK RUNS OUT

IP20 CE EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

1138



Finishes

00/ _ _ White glass
(RAL 9016)

LED temperature colour

/1 _ 2700 K F
CRI >90 1637,0 lm 99 lm/W

Control

1138 _ _ **/** _ **1**
DALI-2

1138 _ _ **/** _ **B**
1-10V, Push

1138 _ _ **/** _ **Z**
Casambi

Materials

Ceiling support: Steel. Diffuser: Glass.

Light Source and electronics

1 x LED PLATE 16,5 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging

1 Box 0,21 x 0,41 x 0,41 m
Vol 0,0353 m^3
Gross weight 2,24 Kg Net weight 1,65 Kg

Notes

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt



Top

Design by Ramos & Bassols

Soft, spherical shapes and a warm luminescence characterize the Top collection. Its glowing epicenter is encircled by a larger ring, lending the look of framing the light within its pure geometry.

Ceiling Wall



1154

ø 17 cm



1155

ø 40 cm



1160


ø 60 cm



1170

ø 90 cm

1154



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **36/** _ _ Soft pink (NCS S 1010-Y50R)
- **40/** _ _ Blue L1 (NCS S 3010-B)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

ED temperature colour

/1 _ 2700 K E
CRI >90 550 lm 100 lm/W

/3 _ 3500 K F
CRI >90 540,2 lm 98,2 lm/W

Control

1154 _ _ **/** _ **0**
On/ Off

Materials

Body: Aluminum.

Light Source and electronics


1 x LED PLATE 5,5 W 150 mA
Constant Current 150 mA
100~240V 50/60Hz

Packaging

1 Box 0,2 x 0,2 x 0,1 m
Vol 0,004 m³
Gross weight 0,8 Kg Net weight 0,5 Kg

LED IP20 Bi-volt

1155



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **36/** _ _ Soft pink (NCS S 1010-Y50R)
- **40/** _ _ Blue L1 (NCS S 3010-B)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

ED temperature colour

/1 _ 2700 K F
CRI >90 2050 lm 112 lm/W

/3 _ 3500 K G
CRI >90 2013,4 lm 110 lm/W

Control

1155 _ _ **/** _ **1**
DALI-2

1155 _ _ **/** _ **B**
1-10V, Push

1155 _ _ **/** _ **Z**
Casambi

Materials

Body: Aluminum.

Light Source and electronics

1 x LED PLATE 18,3 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging


1 Box 0,45 x 0,45 x 0,15 m
Vol 0,03 m³
Gross weight 1,8 Kg Net weight 1,5 Kg

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.



1160



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **36/** _ _ Soft pink (NCS S 1010-Y50R)
- **40/** _ _ Blue L1 (NCS S 3010-B)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED temperature colour

/1 _ 2700 K E
CRI >90 2880 lm 109 lm/W

/3 _ 3500 K F
CRI >90 2828,6 lm 107,1 lm/W

Control

1160 _ _ / _ A
DALI-2, 1-10V, Push

1160 _ _ / _ Z
Casambi

Materials

Body: Aluminum.

Light Source and electronics


1 x LED PLATE 26,4 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,65 x 0,65 x 0,15 m
Vol 0,063 m³
Gross weight 3,13 Kg Net weight 2,5 Kg

LED IP20 Bi-volt

1170



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **36/** _ _ Soft pink (NCS S 1010-Y50R)
- **40/** _ _ Blue L1 (NCS S 3010-B)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED temperature colour

/1 _ 2700 K E
CRI >90 4056,81 lm 101 lm/W

/3 _ 3500 K F
CRI >90 4243,6 lm 105,6 lm/W

Control

1170 _ _ / _ A
DALI-2, 1-10V, Push

1170 _ _ / _ Z
Casambi

Materials

Body: Aluminum. Diffuser: Triplex Opal Glass.

Light Source and electronics

3 x LED 13,4 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Packaging

1 Box 1 x 1 x 0,2 m
Vol 0,02 m³
Gross weight 7,7 Kg Net weight 5,3 Kg

LED IP20

Jazz

Design by Diego Fortunato

Sculptural design with a marked sensual but strong character.
Ancestral forms converted into modern design icons.

Floor Table




1329



1333

1329



Finishes

- **10** White (NCS S 0300-N)
- **25** Beige D1 (NCS S 4005-Y50R)
- **45** Blue D1 (NCS S 7010-B10G)

LED temperature colour

/1 _ 2700 K E
CRI >90 3736 lm 95,8 lm/W

Control

1329 _ _ **/** _ **5**
Push

1329 _ _ **/** _ **Z**
Casambi

Materials

Body: Polyurethane. Diffuser: Polycarbonate.

Light Source and electronics

1 x LED PLATE 18,3 W 500 mA
Constant Current 1050 mA
100~240Vac 50/60Hz

Packaging


2 Boxes 0,45 x 0,80 x 0,20 m
Total Vol 0,1880 m³
Gross weight 19,8 Kg Net weight 15 Kg

Notes

Dimmer on the cable. Electric cable 2,5 m

IP20 CE EAC

1333



Finishes

- **10** White (NCS S 0300-N)
- **25** Beige D1 (NCS S 4005-Y50R)
- **45** Blue D1 (NCS S 7010-B10G)

LED 700 K 1520 lm/W

1333 _ _

Materials

Body: Polyurethane. Diffuser: Optical-glass.
Shade: Aluminum.

Light Source and electronics

4 x LED E27 230V 12 W

Packaging

1 Box 0,51 x 0,51 x 1,14 m
Vol 0,2960 m³
Gross weight 10 Kg Net weight 7,9 Kg

Notes

Switch on the cable. Electric cable 1,5 m.
UNTIL STOCK RUNS OUT

IP20 CE EAC

Product specifications subject to change without notice. Please check vibia.com for updated information.



Flamingo

Design by Antoni Arola

Displaying the elegant poise of the bird that inspired it,
Flamingo projects a feeling of weightlessness hovering overhead.
The deconstructed design separates the LED light source from its
translucent shades, producing gradations of diffuse illumination.

Pendants

1510

ø 70 cm



1515

ø 70 cm



1527

ø 90 cm



1530

ø 90 cm



1540

ø 70 cm



1550

ø 90 cm



1560

ø 90 cm




1570

ø 90 cm



Product specifications subject to change without notice. Please check vibia.com for updated information.

1510



Finishes
- **18/** _ _ Graphite (RAL 7016)
- **20/** _ _ Gold (Gold)
- **67/** _ _ Copper (Copper)
- **93/** _ _ White (RAL 9016)

LED temperature colour
- **/1** _ 2700 K F
  CRI >90 1108,02 lm 99 lm/W
- **/3** _ 3500 K F
  CRI >90 1278,8 lm 114,2 lm/W

Control
- **1510** _ _ **/** _ **1**
  DALI-2
- **1510** _ _ **/** _ **B**
  1-10V, Push
- **1510** _ _ **/** _ **Z**
  Casambi

Materials
Diffuser: Methacrylate. Shade: Acrylic.
Body: Aluminum. Canopy and rods: Steel.


Light Source and electronics
2 x LED 5,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1320 m³
Gross weight 8,7 Kg Net weight 7,8 Kg

Notes
Extra cable length.

LED IP20 CE EAC Bi-volt

1515



Finishes
- **18/** _ _ Graphite (RAL 7016)
- **20/** _ _ Gold (Gold)
- **67/** _ _ Copper (Copper)
- **93/** _ _ White (RAL 9016)

LED temperature colour
- **/1** _ 2700 K F
  CRI >90 1108,02 lm 99 lm/W
- **/3** _ 3500 K F
  CRI >90 1278,8 lm 114,2 lm/W

Control
- **1515** _ _ **/** _ **5**
  Push

Materials
Diffuser: Methacrylate. Shade: Acrylic.
Body: Aluminum. Canopy and rods: Steel.


Light Source and electronics
2 x LED 5,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0620 m³
Gross weight 7,2 Kg Net weight 5,2 Kg

Notes
Dimmer on the cable. Electric cable 2,5 m
Extra cable length.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

1527



Finishes
- **18/** _ _ Graphite (RAL 7016)
- **20/** _ _ Gold (Gold)
- **67/** _ _ Copper (Copper)
- **93/** _ _ White (RAL 9016)

LED temperature colour
- **/1** _ 2700 K F
  CRI >90 1108,02 lm 99 lm/W
- **/3** _ 3500 K F
  CRI >90 1278,8 lm 114,2 lm/W

Control
- **1527** _ _ **/** _ **1**
  DALI-2
- **1527** _ _ **/** _ **B**
  1-10V, Push
- **1527** _ _ **/** _ **Z**
  Casambi

Materials
Diffuser: Methacrylate. Shade: Acrylic.
Body: Aluminum. Canopy and rods: Steel.


Light Source and electronics
2 x LED 5,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
1 Box 0,12 x 0,80 x 0,79 m
Vol 0,0634 m³
Gross weight 4,1 Kg Net weight 3,69 Kg

Notes
Extra cable length.

LED IP20 CE EAC Bi-volt

1530



Finishes

- **18/** _ _ Graphite (RAL 7016)
- **20/** _ _ Gold (Gold)
- **67/** _ _ Copper (Copper)
- **93/** _ _ White (RAL 9016)

LED temperature colour

/1 _ 2700 K F
CRI >90 1662,03 lm 99 lm/W

/3 _ 3500 K F
CRI >90 1918,2 lm 114,2 lm/W

Control

1530 _ _ **/** _ **1**
DALI-2

1530 _ _ **/** _ **B**
1-10V, Push

1530 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Methacrylate. Shade: Acrylic.
Body: Aluminum. Canopy and rods: Steel.

Light Source and electronics

3 x LED 5,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging


3 Boxes
Total Vol 0,1520 m³
Gross weight 10 Kg Net weight 7 Kg

Notes

Extra cable length.

LED IP20 CE EAC

1540



Finishes

- **18/** _ _ Graphite (RAL 7016)
- **20/** _ _ Gold (Gold)
- **67/** _ _ Copper (Copper)
- **93/** _ _ White (RAL 9016)

LED temperature colour

/1 _ 2700 K F
CRI >90 554,01 lm 99 lm/W

/3 _ 3500 K F
CRI >90 639,4 lm 114,2 lm/W

Control

1540 _ _ **/** _ **1**
DALI-2

1540 _ _ **/** _ **B**
1-10V, Push

1540 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Methacrylate. Shade: Acrylic.
Body: Aluminum. Canopy and rods: Steel.

Light Source and electronics

1 x LED 5,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,0620 m³
Gross weight 6 Kg Net weight 4 Kg

Notes

Extra cable length.

LED IP20 CE EAC Bi-volt

1550



Finishes

- **18/** _ _ Graphite (RAL 7016)
- **20/** _ _ Gold (Gold)
- **67/** _ _ Copper (Copper)
- **93/** _ _ White (RAL 9016)

LED temperature colour

/1 _ 2700 K F
CRI >90 1662,03 lm 99 lm/W

/3 _ 3500 K F
CRI >90 1918,2 lm 114,2 lm/W

Control

1550 _ _ **/** _ **1**
DALI-2

1550 _ _ **/** _ **B**
1-10V, Push

1550 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Methacrylate. Shade: Acrylic.
Body: Aluminum. Canopy and rods: Steel.

Light Source and electronics

3 x LED 5,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging

3 Boxes
Total Vol 0,1520 m³
Gross weight 11,3 Kg Net weight 8,8 Kg


Notes

Extra cable length.

LED IP20 CE EAC

Product specifications subject to change without notice. Please check vibia.com for updated information.

1560



Finishes

- **18/** _ _ Graphite (RAL 7016)
- **20/** _ _ Gold (Gold)
- **67/** _ _ Copper (Copper)
- **93/** _ _ White (RAL 9016)

LED temperature colour

- **/1** _ 2700 K F
  CRI >90 1662,03 lm 99 lm/W
- **/3** _ 3500 K F
  CRI >90 1918,2 lm 114,2 lm/W

Control

- **1560** _ _ **/** _ **1**
  DALI-2
- **1560** _ _ **/** _ **B**
  1-10V, Push
- **1560** _ _ **/** _ **Z**
  Casambi

Materials

Diffuser: Methacrylate. Shade: Acrylic.
Body: Aluminum. Canopy and rods: Steel.

Light Source and electronics

3 x LED 5,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging


3 Boxes
Total Vol 0,1860 m³
Gross weight 12,7 Kg Net weight 10,2 Kg

Notes

Extra cable length.

LED IP20 CE EAC

1570

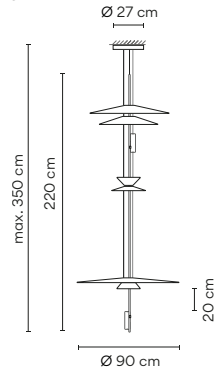

Finishes

- **18/** _ _ Graphite (RAL 7016)
- **20/** _ _ Gold (Gold)
- **67/** _ _ Copper (Copper)
- **93/** _ _ White (RAL 9016)

LED temperature colour

- **/1** _ 2700 K F
  CRI >90 2216,04 lm 99 lm/W
- **/3** _ 3500 K F
  CRI >90 2557,6 lm 114,2 lm/W

Control

- **1570** _ _ **/** _ **1**
  DALI-2
- **1570** _ _ **/** _ **B**
  1-10V, Push
- **1570** _ _ **/** _ **Z**
  Casambi

Materials

Diffuser: Methacrylate. Shade: Acrylic.
Body: Aluminum. Canopy and rods: Steel.

Light Source and electronics

4 x LED 5,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,1633 m³
Gross weight 10 Kg Net weight 8,64 Kg

Notes

Extra cable length.

LED IP20 CE EAC





Flamingo Mini

Design by Antoni Arola

Flamingo Mini creates multi-layered silhouettes with an avant-garde, intriguing aesthetic. This hanging lamp recalls a bird hovering overhead, bringing an intimate ambience as it casts diffuse gradations of soothing light through its translucent diffuser.

Pendants

1575
Ø 45 cm

1580
Ø 9 cm

1585
Ø 45 cm

1590
Ø 45 cm




Three options of installation





1575



Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K E
CRI >90 726 lm 124 lm/W

Control
1575 _ _ **/** _ **1**
DALI-2
1575 _ _ **/** _ **B**
Push; 1-10V
1575 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: PMMA. Rods: Stainless steel.
Body: Aluminum. Canopy: ABS.

Light Source and electronics
2 x LED 3W 175 mA
Constant current 350 mA
110~240Vac 50/60Hz


Packaging
2 Boxes
Box 1: 0,07 x 0,07 x 1,25 m
Box 2: 0,51 x 0,51 x 0,16 m
Total Vol 0,0478 m³
Gross weight 5,5 Kg Net weight 4 Kg

Notes
Additional cable length
personalisation

LED □ IP20 CE EAC Bi-volt

Select Eletrical connection
Surface
_23 Built-in XS

1580



Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K E
CRI >90 726 lm 124 lm/W

Control
1580 _ _ **/** _ **1**
DALI-2
1580 _ _ **/** _ **B**
Push; 1-10V
1580 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: PMMA. Rods: Stainless steel.
Body: Aluminum. Canopy: ABS.

Light Source and electronics
2 x LED 3W 175 mA
Constant current 350 mA
110~240Vac 50/60Hz


Packaging
2 Boxes
Box 1: 0,068 x 0,068 x 1,25 m
Box 2: 0,20 x 0,21 x 0,13 m
Total Vol 0,0112 m³
Gross weight 4 Kg Net weight 3 Kg

Notes
Additional cable length
personalisation

LED □ IP20 CE EAC Bi-volt

Select Eletrical connection
Surface
_23 Built-in XS

1585



Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K E
CRI >90 726 lm 124 lm/W

Control
1585 _ _ **/** _ **1**
DALI-2
1585 _ _ **/** _ **B**
Push; 1-10V
1585 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: PMMA. Rods: Stainless steel.
Body: Aluminum. Canopy: ABS.

Light Source and electronics
2 x LED 3W 175 mA
Constant current 350 mA
110~240Vac 50/60Hz

Packaging
2 Boxes
Box 1: 0,07 x 0,07 x 1,25 m
Box 2: 0,51 x 0,51 x 0,16 m
Total Vol 0,0478 m³
Gross weight 5,5 Kg Net weight 4 Kg


Notes
Additional cable length
personalisation

LED □ IP20 CE EAC Bi-volt

Select Eletrical connection
Surface
_23 Built-in XS

1160 | 10 | /1 | A | _18
Model | Finish | LED Colour Temperature | Control | Electrical connection

1590



Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K E
CRI>90 1152 lm 132 lm/W

Control
1590 _ _ / _ 1
DALI-2
1590 _ _ / _ B
Push; 1-10V
1590 _ _ / _ Z
Casambi

Materials
Diffuser: PMMA. Rods: Stainless steel.
Body: Aluminum. Canopy: ABS.

Light Source and electronics
3 x LED COB 3W 185 mA
Constant Current 550 mA
110~240Vac 50/60Hz

Packaging
2 Boxes
Box 1: 0,07 x 0,07 x 1,60 m
Box 2: 0,51 x 0,51 x 0,16 m
Total Vol 0,0494 m³
Gross weight 6,5 Kg Net weight 5 Kg

Notes
Additional cable length
personalisation

LED | □ | IP20 | CE | EAC | Bi-volt

Select Eletrical connection
Surface
_23 Built-in XS

Electrical connection options

Choose your preferred installation option according to your needs.

Drop ceiling

_23 Built-in XS



Ø 8 cm
height 6 cm
black finish.

Regular ceiling

Surface



Ø 10 cm
black finish.




Pin

Design by Ichiro Iwasaki

Through the exploration of “eternal comfort” in lighting environments PIN aims to provide something new and original yet in harmony with both the old and the contemporary.

Table

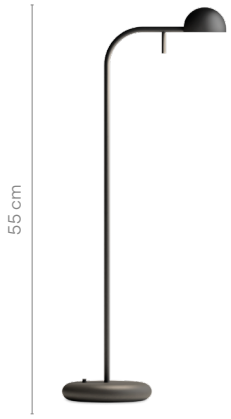


1650



1655

1650



Finishes

- **04/** _ _ Black (NCS 9000N)
- **58/** _ _ Cream (NCS S 2005-Y20R)
- **62/** _ _ Green (NCS S 3010-G20Y)
- **93/** _ _ White (NCS S 0502-Y)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K E
CRI >90 485 lm 121 lm/W

Control

1650 _ _ **/** _ **0**
On/ Off

Materials

Head: Aluminum. Base: Zamak.
Diffuser: Polycarbonate. Rod: Steel.

Light Source and electronics

1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging


1 Box 0,174 x 0,212 x 0,713 m
Vol 0,0212 m^3
Gross weight 2,94 Kg Net weight 2 Kg

Notes

Switch on the base. Electric cable 3 m.

LED IP20 CE EAC Bi-volt

1655



Finishes

- **04/** _ _ Black (NCS 9000N)
- **58/** _ _ Cream (NCS S 2005-Y20R)
- **62/** _ _ Green (NCS S 3010-G20Y)
- **93/** _ _ White (NCS S 0502-Y)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K E
CRI >90 485 lm 121 lm/W

Control

1655 _ _ **/** _ **0**
On/ Off

Materials

Head: Aluminum. Base: Zamak.
Diffuser: Polycarbonate. Rod: Steel.

Light Source and electronics

1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,20 x 0,357 x 0,67 m
Vol 0,0480 m^3
Gross weight 3,68 Kg Net weight 2,2 Kg

Notes

Switch on the base. Electric cable 3 m.

LED IP20 CE EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 10 /1 A
Model
Finish
LED temperature colour
Control




Floor



1660 **1665** **1670**

1660



Finishes

- **04/** _ _ Black (NCS 9000N)
- **58/** _ _ Cream (NCS S 2005-Y20R)
- **62/** _ _ Green (NCS S 3010-G20Y)
- **93/** _ _ White (NCS S 0502-Y)

Finish customization (Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K E
CRI >90 485 lm 121 lm/W

Control

1660 _ _ **/** _ **0**
On/ Off

Materials

Head: Aluminum. Base: Zamak.
Diffuser: Polycarbonate. Rod: Steel.

Light Source and electronics

1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,149 x 0,265 x 0,33 m
Vol 0,1310 m^3
Gross weight 7,45 Kg Net weight 3,8 Kg


Notes

Switch on the base. Electric cable 3 m.

LED IP20 CE EAC Bi-volt



1665



Finishes

- **04/** _ _ Black (NCS 9000N)
- **58/** _ _ Cream (NCS S 2005-Y20R)
- **62/** _ _ Green (NCS S 3010-G20Y)
- **93/** _ _ White (NCS S 0502-Y)

Finish customization
(Available options: Vibia colour palette)

LED colour temperature

/1 _ 2700 K E
CRI >90 980,5 lm 109 lm/W

Control

1665 _ _ **/** _ **0**
On/ Off

Materials

Head: Aluminum. Base: Zamak.
Diffuser: Polycarbonate. Rod: Steel.

Light Source and electronics

2 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging


1 Box 1,496 x 0,265 x 0,33 m
Vol 0,1310 m³
Gross weight 8,25 Kg Net weight 4,6 Kg

Notes

Switch on the base. Electric cable 3 m.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

1670

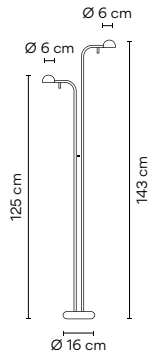

Finishes

- **04/** _ _ Black (NCS 9000N)
- **58/** _ _ Cream (NCS S 2005-Y20R)
- **62/** _ _ Green (NCS S 3010-G20Y)
- **93/** _ _ White (NCS S 0502-Y)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K E
CRI >90 970 lm 121 lm/W

Control

1670 _ _ **/** _ **0**
On/ Off

Materials

Head: Aluminum. Base: Zamak.
Diffuser: Polycarbonate. Rod: Steel.

Light Source and electronics

2 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 1,496 x 0,265 x 0,33 m
Vol 0,1310 m³
Gross weight 8,25 Kg Net weight 4,6 Kg

Notes

Switch on the base. Electric cable 3 m.

LED IP20 CE EAC Bi-volt

Wall



ø 10 cm

1675 62



ø 10 cm

1675 04



ø 10 cm

1675 58



ø 10 cm

1675 93



ø 10 cm

1680



ø 10 cm

1685



ø 10 cm

1686




ø 10 cm

1690




ø 10 cm

1692

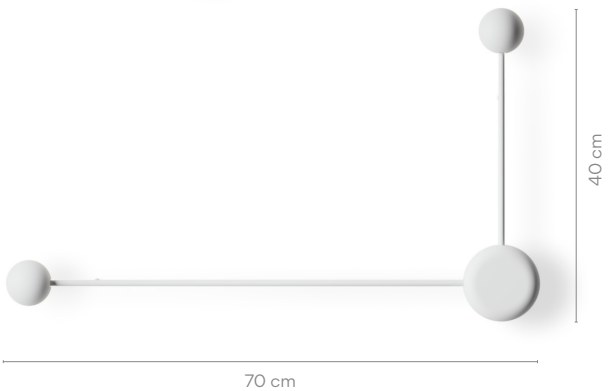

1694

1675



Finishes
- **04/** _ _ Black (NCS 9000N)
- **58/** _ _ Cream (NCS S 2005-Y20R)
- **62/** _ _ Green (NCS S 3010-G20Y)
- **93/** _ _ White (NCS S 0502-Y)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour
/1 _ 2700 K E
CRI >90 485 lm 121 lm/W

Control
1675 _ _ **/** _ **0**
On/ Off

Materials
Head: Aluminum. Base: Zamak.
Diffuser: Polycarbonate. Rod: Steel.


Light Source and electronics
1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,193 x 0,148 x 0,161 m
Vol 0,0046 m³
Gross weight 0,85 Kg Net weight 0,6 Kg

Notes
Switch on the wall plate

LED IP20 CE EAC Bi-volt

1680



Finishes
- **04/** _ _ Black (NCS 9000N)
- **58/** _ _ Cream (NCS S 2005-Y20R)
- **62/** _ _ Green (NCS S 3010-G20Y)
- **93/** _ _ White (NCS S 0502-Y)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour
/1 _ 2700 K E
CRI >90 485 lm 121 lm/W

Control
1680 _ _ **/** _ **0**
On/ Off

Materials
Head: Aluminum. Base: Zamak.
Diffuser: Polycarbonate. Rod: Steel.


Light Source and electronics
1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,146 x 0,355 x 0,473 m
Vol 0,0250 m³
Gross weight 1,745 Kg Net weight 1 Kg

Notes
Switch on the wall plate

LED IP20 CE EAC Bi-volt

1685



Finishes
- **04/** _ _ Black (NCS 9000N)
- **58/** _ _ Cream (NCS S 2005-Y20R)
- **62/** _ _ Green (NCS S 3010-G20Y)
- **93/** _ _ White (NCS S 0502-Y)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour
/1 _ 2700 K E
CRI >90 970 lm 121 lm/W

Control
1685 _ _ **/** _ **0**
On/ Off

Materials
Head: Aluminum. Base: Zamak.
Diffuser: Polycarbonate. Rod: Steel.


Light Source and electronics
2 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,177 x 0,445 x 0,792 m
Vol 0,0620 m³
Gross weight 2,64 Kg Net weight 1,2 Kg

Notes
Switch on the wall plate

LED IP20 CE EAC Bi-volt

1686



Finishes

- **04/** _ _ Black (NCS 9000N)
- **58/** _ _ Cream (NCS S 2005-Y20R)
- **62/** _ _ Green (NCS S 3010-G20Y)
- **93/** _ _ White (NCS S 0502-Y)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K E
CRI >90 970 lm 121 lm/W

Control

1686 _ _ **/** _ **0**
On/ Off

Materials

Head: Aluminum. Base: Zamak.
Diffuser: Polycarbonate. Rod: Steel.

Light Source and electronics

2 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging


1 Box 0,177 x 0,445 x 0,792 m
Vol 0,0620 m³
Gross weight 2,64 Kg Net weight 1,2 Kg

Notes

Switch on the wall plate

LED IP20 CE EAC Bi-volt

1690



Finishes

- **04/** _ _ Black (NCS 9000N)
- **58/** _ _ Cream (NCS S 2005-Y20R)
- **62/** _ _ Green (NCS S 3010-G20Y)
- **93/** _ _ White (NCS S 0502-Y)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K E
CRI >90 485 lm 121 lm/W

Control

1690 _ _ **/** _ **0**
On/ Off

Materials

Head: Aluminum. Base: Zamak.
Diffuser: Polycarbonate. Rod: Steel.

Light Source and electronics


1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,146 x 0,355 x 0,473 m
Vol 0,0250 m³
Gross weight 1,545 Kg Net weight 0,8 Kg

LED IP20 CE EAC Bi-volt

1692



Finishes

- **04/** _ _ Black (NCS 9000N)
- **58/** _ _ Cream (NCS S 2005-Y20R)
- **62/** _ _ Green (NCS S 3010-G20Y)
- **93/** _ _ White (NCS S 0502-Y

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K E
CRI >90 485 lm 121 lm/W

Control

1692 _ _ **/** _ **0**
On/ Off

Materials

Head: Aluminum. Base: Zamak.
Diffuser: Polycarbonate. Rod: Steel.

Light Source and electronics

1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz


Packaging

1 Box 0,177 x 0,445 x 0,792 m
Vol 0,620 m³
Gross weight 2,44 Kg Net weight 1 Kg

LED IP20 CE EAC Bi-volt



1694



Finishes

- **04/** _ _ Black (NCS 9000N)
- **58/** _ _ Cream (NCS S 2005-Y20R)
- **62/** _ _ Green (NCS S 3010-G20Y)
- **93/** _ _ White (NCS S 0502-Y)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K E
CRI >90 970 lm 121 lm/W

Control

1694 _ _ / _ **0**
On/ Off

Materials

Head: Aluminum. Base: Zamak.
Diffuser: Polycarbonate. Rod: Steel.

Light Source and electronics

2 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,177 x 0,445 x 0,792 m
Vol 0,620 m^3
Gross weight 2,84 Kg Net weight 1,4 Kg

LED IP20 CE EAC Bi-volt

Array

Design by Umut Yamac

A striking pendant of impressive proportions, Array is an exploration of thread and its potential to create lightweight and dynamic sculptures of light.

Pendants

Height 70 cm



Ø 37 cm


1800



Ø 55 cm


1815

Height 110 cm




Ø 37 cm

1805




Ø 55 cm

1820



Ø 83 cm

1830



Ø 124 cm


1840

Height 190 cm



Ø 37 cm

1810



Ø 55 cm

1825



Ø 83 cm

1835



Ø 124 cm

1845

Product specifications subject to change without notice. Please check vibia.com for updated information.

Height 70 cm



Ø 55 cm

1850

Height 110 cm



Ø 55 cm

1855



Ø 83 cm

1865



Ø 124 cm

1875

Height 190 cm



Ø 55 cm

1860



Ø 83 cm


1870



Ø 124 cm

1880

1800



Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K D
CRI >90 2662 lm 121 lm/W

Control
1800 _ _ **/** _ **3**
1-10V

1800 _ _ **/** _ **D**
Push; DALI-2

1800 _ _ **/** _ **Z**
Casambi

Finishes (rings and canopy)
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 22W 48V
Constant Voltage 48V
90~305Vac 50/60Hz


Packaging
1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 7 Kg Net weight 4,8 Kg

Notes
Extra cable length.

LED IP20 CE EAC
Multi-volt Dimmer

Select Eletrical connection
Surface
_24 Built-in S
_31 Remote Micro

1805



Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K D
CRI >90 2662 lm 121 lm/W

Control
1805 _ _ **/** _ **3**
1-10V

1805 _ _ **/** _ **D**
Push; DALI-2

1805 _ _ **/** _ **Z**
Casambi

Finishes (rings and canopy)
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 22W 48V
Constant Voltage 48V
90~305Vac 50/60Hz


Packaging
1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 7,3 Kg Net weight 5,1 Kg

Notes
Extra cable length.

LED IP20 CE EAC
Multi-volt Dimmer

Select Eletrical connection
Surface
_24 Built-in S
_31 Remote Micro

1810



Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K D
CRI >90 2662 lm 121 lm/W

Control
1810 _ _ **/** _ **3**
1-10V

1810 _ _ **/** _ **D**
Push; DALI-2

1810 _ _ **/** _ **Z**
Casambi

Finishes (rings and canopy)
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 22W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 7,6 Kg Net weight 5,4 Kg

Notes
Extra cable length.

LED IP20 CE EAC
Multi-volt Dimmer


Select Eletrical connection
Surface
_24 Built-in S
_31 Remote Micro

Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 10 /1A _18

Model
Finish
LED Colour Temperature
Control
Electrical connection

1815



Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K D
CRI >90 3993 lm 121 lm/W

Control
1815 _ _ **/** _ **3**
1-10V

1815 _ _ **/** _ **D**
Push; DALI-2

1815 _ _ **/** _ **Z**
Casambi

Finishes (rings and canopy)
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 33W 48V
Constant Voltage 48V
90~305Vac 50/60Hz


Packaging
1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 8,4 Kg Net weight 6,2 Kg

Notes
Extra cable length.

LED IP20 CE EAC
Multi-volt Dimmer

Select Eletrical connection
Surface
_24 Built-in S
_31 Remote Micro

1820

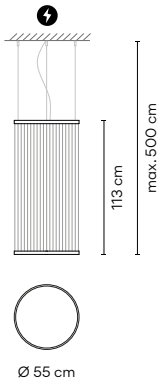

Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K D
CRI >90 3993 lm 121 lm/W

Control
1820 _ _ **/** _ **3**
1-10V

1820 _ _ **/** _ **D**
Push; DALI-2

1820 _ _ **/** _ **Z**
Casambi

Finishes (rings and canopy)
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 33W 48V
Constant Voltage 48V
90~305Vac 50/60Hz


Packaging
1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 8,8 Kg Net weight 6,6 Kg

Notes
Extra cable length.

LED IP20 CE EAC
Multi-volt Dimmer

Select Eletrical connection
Surface
_24 Built-in S
_31 Remote Micro

1825

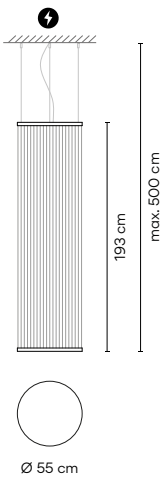

Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K D
CRI >90 3993 lm 121 lm/W

Control
1825 _ _ **/** _ **3**
1-10V

1825 _ _ **/** _ **D**
Push; DALI-2

1825 _ _ **/** _ **Z**
Casambi

Finishes (rings and canopy)
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 33W 48V
Constant Voltage 48V
90~305Vac 50/60Hz


Packaging
1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 9,2 Kg Net weight 7 Kg

Notes
Extra cable length.

LED IP20 CE EAC
Multi-volt Dimmer

Select Eletrical connection
Surface
_24 Built-in S
_31 Remote Micro

1830

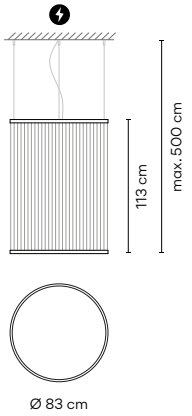

Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K D
CRI >90 6050 lm 121 lm/W

Control
1830 _ _ **/** _ **3**
1-10V

1830 _ _ **/** _ **D**
Push; DALI-2

1830 _ _ **/** _ **Z**
Casambi

Finishes (rings and canopy)
- **Black** (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 50W 48V
Constant Voltage 48V
90~305Vac 50/60Hz


Packaging
1 Box 0,93 x 0,93 x 0,120 m
Vol 0,1037 m³
Gross weight 13,5 Kg Net weight 9,5 Kg

Notes
Extra cable length.

LED IP20 CE EAC
Multi-volt Dimmer

Select Eletrical connection
Surface
_24 Built-in S
_31 Remote Micro

1835

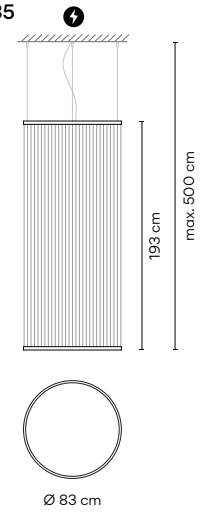

Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K D
CRI >90 6050 lm 121 lm/W

Control
1835 _ _ **/** _ **3**
1-10V

1835 _ _ **/** _ **D**
Push; DALI-2

1835 _ _ **/** _ **Z**
Casambi

Finishes (rings and canopy)
- **Black** (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 50W 48V
Constant Voltage 48V
90~305Vac 50/60Hz


Packaging
1 Box 0,93 x 0,93 x 0,120 m
Vol 0,1037 m³
Gross weight 14,1 Kg Net weight 10,1 Kg

Notes
Extra cable length.

LED IP20 CE EAC
Multi-volt Dimmer

Select Eletrical connection
Surface
_24 Built-in S
_31 Remote Micro

1840

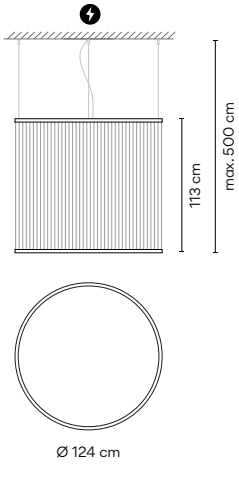

Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K D
CRI >90 9196 lm 121 lm/W

Control
1840 _ _ **/** _ **3**
1-10V

1840 _ _ **/** _ **D**
Push; DALI-2

1840 _ _ **/** _ **Z**
Casambi

Finishes (rings and canopy)
- **Black** (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 76W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 1,35 x 1,35 x 0,120 m
Vol 0,2187 m³
Gross weight 19 Kg Net weight 13 Kg

Notes
Extra cable length.

LED IP20 CE EAC
Multi-volt Dimmer


Select Eletrical connection
Surface
_24 Built-in S
_31 Remote Micro

Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 10 /1A _18

Model
Finish
LED Colour Temperature
Control
Electrical connection

1845

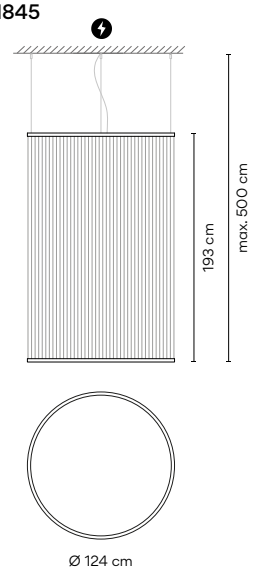

Finishes (threads)

- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K D
CRI >90 9196 lm 121 lm/W

Control

1845 _ _ **/** _ **3**
1-10V

1845 _ _ **/** _ **D**
Push; DALI-2

1845 _ _ **/** _ **Z**
Casambi

Finishes (rings and canopy)

- Black (NCS S 8500-N)

Materials

Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics

1 x LED STRIP 76W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging

1 Box 1,35 x 1,35 x 0,120 m
Vol 0,2187 m^3
Gross weight 19,9 Kg Net weight 13,9 Kg


Notes

Extra cable length.


LED IP20 EAC
Multi-volt Dimmer

Select Eletrical connection

Surface
_24 Built-in S
_31 Remote Micro

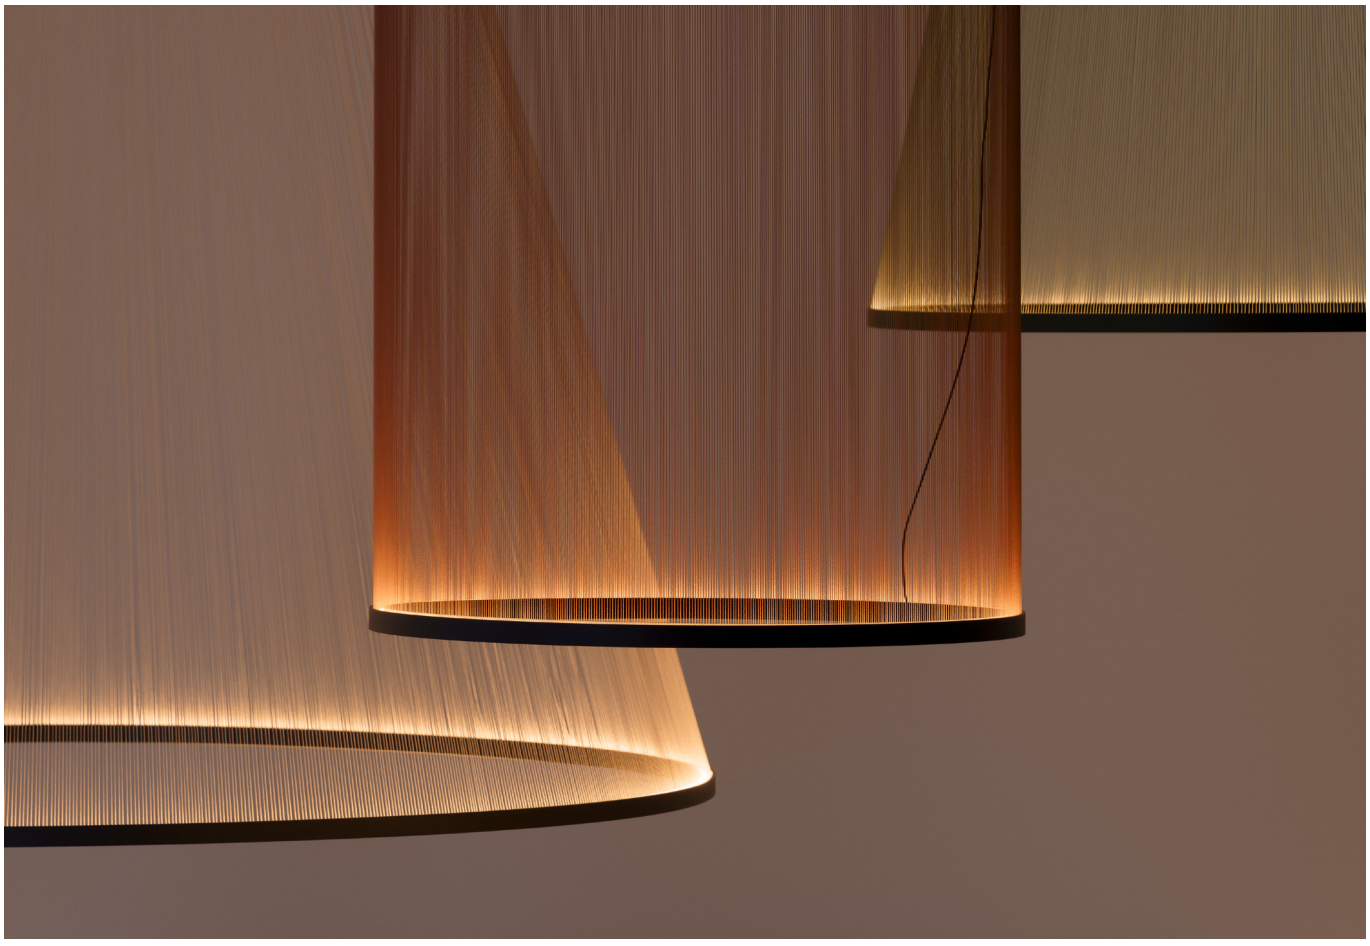

1850



Finishes (threads)

- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K D
CRI >90 3993 lm 121 lm/W

Control

1850 _ _ **/** _ **3**
1-10V

1850 _ _ **/** _ **D**
Push; DALI-2

1850 _ _ **/** _ **Z**
Casambi

Finishes (rings and canopy)

- **Black** (NCS S 8500-N)

Materials

Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics

1 x LED STRIP 33W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging

1 Box 0,62 x 0,62 x 0,121 m
Vol 0,0461 m³
Gross weight 7,9 Kg Net weight 5,7 Kg

Notes


Extra cable length.

LED IP20 CE EAC
Multi-volt Dimmer

Select Eletrical connection

Surface
_24 Built-in S
_31 Remote
Micro

1855

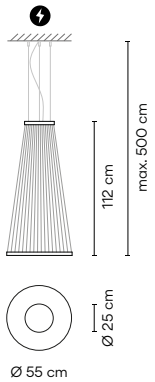

Finishes (threads)

- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K D
CRI >90 3993 lm 121 lm/W

Control

1855 _ _ **/** _ **3**
1-10V

1855 _ _ **/** _ **D**
Push; DALI-2

1855 _ _ **/** _ **Z**
Casambi

Finishes (rings and canopy)

- **Black** (NCS S 8500-N)

Materials

Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics

1 x LED STRIP 33W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging

1 Box 0,62 x 0,62 x 0,121 m
Vol 0,0461 m³
Gross weight 8,3 Kg Net weight 6,1 Kg

Notes


Extra cable length.

LED IP20 CE EAC
Multi-volt Dimmer

Select Eletrical connection

Surface
_24 Built-in S
_31 Remote
Micro

1860

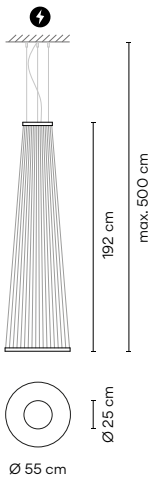

Finishes (threads)

- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K D
CRI >90 3993 lm 121 lm/W

Control

1860 _ _ **/** _ **3**
1-10V

1860 _ _ **/** _ **D**
Push; DALI-2

1860 _ _ **/** _ **Z**
Casambi

Finishes (rings and canopy)

- **Black** (NCS S 8500-N)

Materials

Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics

1 x LED STRIP 33W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging

1 Box 0,62 x 0,62 x 0,121 m
Vol 0,0461 m³
Gross weight 8,7 Kg Net weight 6,5 Kg

Notes

Extra cable length.

LED IP20 CE EAC
Multi-volt Dimmer

Select Eletrical connection


Surface
_24 Built-in S
_31 Remote
Micro

Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 10 /1A _18

Model
Finish
LED Colour Temperature
Control
Electrical connection

1865

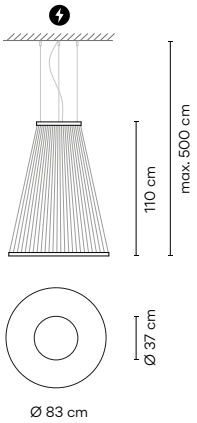

Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K D
CRI >90 6050 lm 121 lm/W

Control
1865 _ _ **/** _ **3**
1-10V

1865 _ _ **/** _ **D**
Push; DALI-2

1865 _ _ **/** _ **Z**
Casambi

Finishes (rings and canopy)
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 50W 48V
Constant Voltage 48V
90~305Vac 50/60Hz


Packaging
1 Box 0,93 x 0,93 x 0,120 m
Vol 0,1037 m³
Gross weight 11,8 Kg Net weight 8,8 Kg

Notes
Extra cable length.

LED IP20 EAC Multi-volt Dimmer

Select Eletrical connection
Surface
_24 Built-in S
_31 Remote Micro

1870

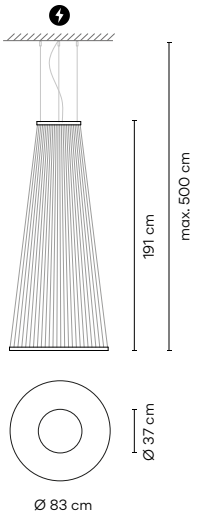

Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K D
CRI >90 6050 lm 121 lm/W

Control
1870 _ _ **/** _ **3**
1-10V

1870 _ _ **/** _ **D**
Push; DALI-2

1870 _ _ **/** _ **Z**
Casambi

Finishes (rings and canopy)
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 50W 48V
Constant Voltage 48V
90~305Vac 50/60Hz


Packaging
1 Box 0,93 x 0,93 x 0,120 m
Vol 0,1037 m³
Gross weight 12,4 Kg Net weight 9,4 Kg

Notes
Extra cable length.

LED IP20 EAC Multi-volt Dimmer

Select Eletrical connection
Surface
_24 Built-in S
_31 Remote Micro

1875

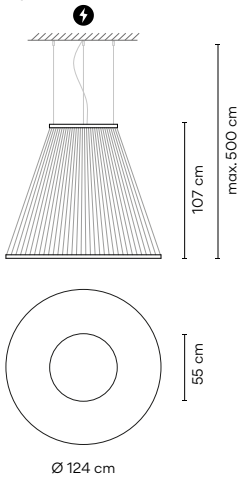

Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K D
CRI >90 9196 lm 121 lm/W

Control
1875 _ _ **/** _ **3**
1-10V

1875 _ _ **/** _ **D**
Push; DALI-2

1875 _ _ **/** _ **Z**
Casambi

Finishes (rings and canopy)
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 76W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 1,35 x 1,35 x 0,12 m
Vol 0,2187 m³
Gross weight 15,9 Kg Net weight 11,9 Kg


Notes
Extra cable length.

LED IP20 EAC Multi-volt Dimmer

Select Eletrical connection
Surface
_24 Built-in S
_31 Remote Micro

1160 | 10 | /1 | A | _18
Model | Finish | LED Colour Temperature | Control | Electrical connection

1880

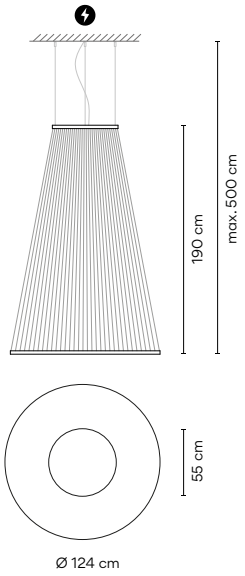

Finishes (threads)

- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K D
CRI >90 9196 lm 121 lm/W

Control

1880 _ _ **/** _ **3**
1-10V

1880 _ _ **/** _ **D**
Push; DALI-2

1880 _ _ **/** _ **Z**
Casambi

Finishes (rings and canopy)

- Black (NCS S 8500-N)

Materials

Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics

1 x LED STRIP 76W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging

1 Box 1,35 x 1,35 x 0,12 m
Vol 0,2187 m^3
Gross weight 16,8 Kg Net weight 12,8 Kg

Notes

Extra cable length.

LED | IP20 | CE | EAC | Multi-volt | Dimmer

Select Eletrical connection

Surface
_24 Built-in S
_31 Remote Micro

Electrical connection options

Choose your preferred installation option according to your needs.

Drop ceiling

_31 Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_24 Built-in S



Ø 8 cm
height 6 cm

black finish.

Regular ceiling

Surface



Ø 25,5 cm
height 4,5 cm

black finish.



Ø 37,5 cm
height 4,5 cm

black finish.

Product specifications subject to change without notice. Please check vibia.com for updated information.



Funnel

A fluid design defines this ceiling fixture, a streamlined, funnel-shaped base that flows into a protruding cap. The smooth, sculptural curves conceal a light source behind the tip, which reflects back on the funnel form and creates a flood of ambient illumination.

Ceiling Wall

2012

ø 22 cm



2013

ø 35 cm




2014


ø 50 cm




2012




2013



2012





Finishes
- **10/** _ _ White (NCS S 0300-N)
- **36/** _ _ Soft Pink (NCS S 1010-Y50R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED temperature colour
- **/1** _ 2700 K E — CRI >80 631,7 lm 100 lm/W
- **/2** _ 3000 K E — CRI >80 649 lm 103 lm/W
- **/3** _ 3500 K F — CRI >90 655,4 lm 104 lm/W

Control
2012 _ _ **/** _ **0**
On/ Off

Finishes
- **51/** _ _ Gold leaf (Gold leaf)

LED temperature colour
- **/1** _ 2700 K E — CRI >80 631,7 lm 100 lm/W
- **/2** _ 3000 K E — CRI >80 649 lm 103 lm/W
- **/3** _ 3500 K F — CRI >90 655,4 lm 104 lm/W

Control
2012 _ _ **/** _ **0**
On/ Off

Materials
Shade: Aluminum. Reflector: Aluminum.
Support: Steel.

Light Source and electronics
1 x LED PLATE 6,3 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,27 x 0,27 x 0,16 m
Vol 0,0116 m^3
Gross weight 0,892 Kg Net weight 0,45 Kg


LED IP20 CE EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 | 10 | /1 | A
Model
Finish
LED temperature colour
Control




2013



Finishes
- **10/** _ _ White (NCS S 0300-N)
- **36/** _ _ Soft Pink (NCS S 1010-Y50R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED temperature colour
- **/1** _ 2700 K E CRI >80 2910 lm 121 lm/W
- **/2** _ 3000 K E CRI >90 2910 lm 121 lm/W
- **/3** _ 3500 K E CRI >90 3019,2 lm 125,8 lm/W

Control
2013 _ _ / _ **A**
DALI-2, 1-10V, Push



Finishes
- **51/** _ _ Gold leaf (Gold leaf)

LED temperature colour
- **/1** _ 2700 K E CRI >80 2910 lm 121 lm/W
- **/2** _ 3000 K E CRI >90 2910 lm 121 lm/W
- **/3** _ 3500 K E CRI >90 3019,2 lm 125,8 lm/W

Control
2013 _ _ / _ **A**
DALI-2, 1-10V, Push


Materials
Shade: Aluminum. Reflector: Aluminum.
Support: Steel.

Light Source and electronics
6 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
1 Box 0,25 x 0,42 x 0,42 m
Vol 0,0441 m³
Gross weight 2,53 Kg Net weight 2 Kg

LED IP20 EAC Bi-volt

2014



Finishes
- **10/** _ _ White (NCS S 0300-N)
- **36/** _ _ Soft Pink (NCS S 1010-Y50R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED temperature colour
- **/1** _ 2700 K E CRI >80 2910 lm 121 lm/W
- **/2** _ 3000 K E CRI >90 2910 lm 121 lm/W
- **/3** _ 3500 K E CRI >90 3019,2 lm 125,8 lm/W

Control
2014 _ _ / _ **A**
DALI-2, 1-10V, Push

2014 _ _ / _ **Z**
Casambi

Materials
Shade: Aluminum. Reflector: Aluminum.
Support: Steel.

Light Source and electronics
6 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 3,782 Kg Net weight 3,3 Kg

LED IP20 EAC Bi-volt


Rhythm Horizontal

Design by Arik Levy

Evoking the mood of Zen minimalism, Rhythm features slender light modules of varying lengths, each fitted with an LED module, that can be arranged in endless configurations. Fluid and flowing or angular and anarchic, Rhythm represents the ultimate in customised lighting.


Pendants

2110



45 x 47 cm

2120



93 x 47 cm

2111



93 x 47 cm

2112



141 x 47 cm

2113



189 x 47 cm

2121



131 x 87 cm



2122



199 x 87 cm


Product specifications subject to change without notice. Please check vibia.com for updated information.

Each project is unique.
Personalise your own
Rhythm composition
quick and easy.

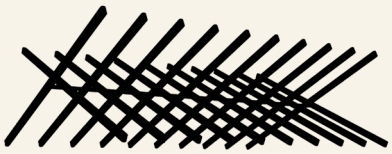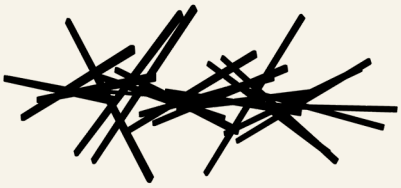

2110



Finishes

14/ _ _ Chocolate
(RAL 8019)

58/ _ _ Off-white
(RAL D2-1109005)

LED temperature colour

/1 _ 2700 K D
CRI >90 4332 lm 144 lm/W

/3 _ 3500 K D
CRI >90 4578,7 lm 152,6 lm/W

Control

2110 _ _ **/** _ **1**
DALI

2110 _ _ **/** _ **3**
1-10V

2110 _ _ **/** _ **Z**
Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate. Canopy: Steel.

Light Source and electronics

10 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,0591 m^3
Gross weight 7,7 Kg Net weight 6 Kg

Notes

2110-14 Built-in accesory
(96 mm) chocolate


2110-58 Built-in accesory
(96 mm) off-white

Surface and built-in fitting

LED IP20 EAC Bi-volt

Ø 18,5 cm Only for built-in.

2111



Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-white (RAL D2-1109005)

LED temperature colour

/1 _ 2700 K D
CRI >90 8664 lm 144 lm/W

/3 _ 3500 K D
CRI >90 9157,3 lm 152,6 lm/W

Control

2111 _ _ **/** _ **1**
DALI

2111 _ _ **/** _ **3**
1-10V

2111 _ _ **/** _ **Z**
Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate. Canopy: Steel.

Light Source and electronics

20 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,1570 m³
Gross weight 14,2 Kg Net weight 10,5 Kg

Notes


2111-14 Built-in accesory (96 mm) chocolate

2111-58 Built-in accesory (96 mm) off-white

Surface and built-in fitting

LED IP20 CE EAC Bi-volt
Ø 18,5 cm Only for built-in.

2112



Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-white (RAL D2-1109005)

LED temperature colour

/1 _ 2700 K D
CRI >90 12996 lm 144 lm/W

/3 _ 3500 K D
CRI >90 13736 lm 152,6 lm/W

Control

2112 _ _ **/** _ **1**
DALI

2112 _ _ **/** _ **3**
1-10V

2112 _ _ **/** _ **Z**
Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate. Canopy: Steel.

Light Source and electronics

30 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,0430 m³
Gross weight 10,3 Kg Net weight 7 Kg

Notes


2112-14 Built-in accesory (44,5 mm) chocolate

2112-58 Built-in accesory (44,5 mm) off-white

Surface and built-in fitting

LED IP20 CE EAC Bi-volt
Ø 18,5 cm Only for built-in.

2113



Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-white (RAL D2-1109005)

LED temperature colour

/1 _ 2700 K D
CRI >90 17328 lm 144 lm/W

/3 _ 3500 K D
CRI >90 18314,6 lm 152,6 lm/W

Control

2113 _ _ **/** _ **1**
DALI

2113 _ _ **/** _ **3**
1-10V

2113 _ _ **/** _ **Z**
Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate. Canopy: Steel.

Light Source and electronics

40 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,1900 m³
Gross weight 17,2 Kg Net weight 13,5 Kg

Notes

2113-14 Built-in accesory (44,5 mm) chocolate

2113-58 Built-in accesory (44,5 mm) off-white


Surface and built-in fitting

LED IP20 CE EAC Bi-volt
Ø 18,5 cm Only for built-in.

Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 | 10 | /1 | A
Model
Finish
LED temperature colour
Control

2120



Finishes
- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-white (RAL D2-1109005)

LED temperature colour
- **/1** _ 2700 K D
  CRI >90 7602,4 lm 127 lm/W
- **/3** _ 3500 K D
  CRI >90 8035,3 lm 133,9 lm/W

Control
- **2120** _ _ **/** _ **1**
  DALI
- **2120** _ _ **/** _ **3**
  1-10V
- **2120** _ _ **/** _ **Z**
  Casambi

Materials
Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate. Canopy: Steel.

Light Source and electronics
10 x LED STRIP 30V 5,8 W
Constant Voltage 30V
100~240V 50/60Hz


Packaging
2 Boxes
Total Vol 0,1380 m³
Gross weight 9,5 Kg Net weight 7,3 Kg

Notes
- **2120-14** Built-in accesory (136 mm) chocolate
- **2120-58** Built-in accesory (136 mm) off-white

Surface and built-in fitting

LED IP20 CE EAC Bi-volt
Ø 18,5 cm Only for built-in.

2121



Finishes
- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-white (RAL D2-1109005)

LED temperature colour
- **/1** _ 2700 K D
  CRI >90 15204,8 lm 127 lm/W
- **/3** _ 3500 K D
  CRI >90 16070,6 lm 133,9 lm/W

Control
- **2121** _ _ **/** _ **1**
  DALI
- **2121** _ _ **/** _ **3**
  1-10V
- **2121** _ _ **/** _ **Z**
  Casambi

Materials
Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate. Canopy: Steel.

Light Source and electronics
20 x LED STRIP 30V 5,8 W
Constant Voltage 30V
100~240V 50/60Hz


Packaging
2 Boxes
Total Vol 0,1664 m³
Gross weight 14,7 Kg Net weight 10,5 Kg

Notes
- **2121-14** Built-in accesory (44,5 mm) chocolate
- **2121-58** Built-in accesory (44,5 mm) off-white

Surface and built-in fitting

LED IP20 CE EAC Bi-volt
Ø 18,5 cm Only for built-in.

2122



Finishes
- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-white (RAL D2-1109005)

LED temperature colour
- **/1** _ 2700 K D
  CRI >90 22807,2 lm 127 lm/W
- **/3** _ 3500 K D
  CRI >90 24105,8 lm 133,9 lm/W

Control
- **2122** _ _ **/** _ **1**
  DALI
- **2122** _ _ **/** _ **3**
  1-10V
- **2122** _ _ **/** _ **Z**
  Casambi

Materials
Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate. Canopy: Steel.

Light Source and electronics
30 x LED STRIP 30V 5,8 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,07120 m³
Gross weight 24 Kg Net weight 21,5 Kg

Notes
- **2122-14** Built-in accesory (44,5 mm) chocolate
- **2122-58** Built-in accesory (44,5 mm) off-white

Surface and built-in fitting

LED IP20 CE EAC Bi-volt
Ø 18,5 cm Only for built-in.


Rhythm Vertical

Design by Arik Levy

Evoking the mood of Zen minimalism, Rhythm features slender light modules of varying lengths, each fitted with an LED module, that can be arranged in endless configurations. Fluid and flowing or angular and anarchic, Rhythm represents the ultimate in customised lighting.

Pendants


2141

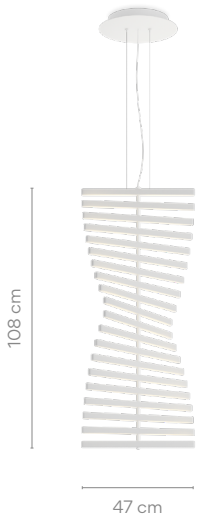


2142



2143

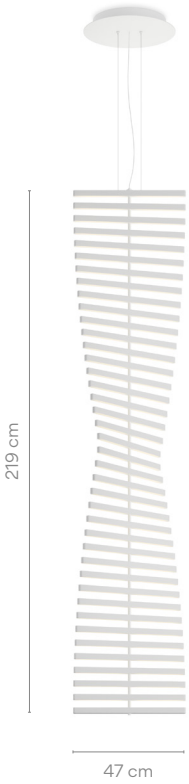


Each project is unique.
Personalise your own
Rhythm composition
quick and easy.

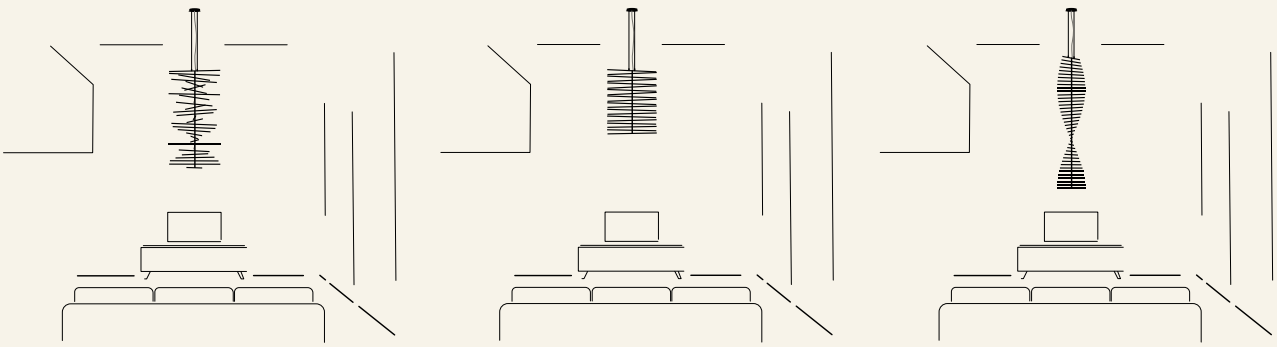

Product specifications subject to change without notice. Please check vibia.com for updated information.

2141



Finishes
- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-white (RAL D2-1109005)

LED temperature colour
- **/1** _ 2700 K D
  CRI >90 8664 lm 144 lm/W
- **/3** _ 3500 K D
  CRI >90 9157,3 lm 152,6 lm/W

Control
- **2141** _ _ **/** _ **1**
  DALI
- **2141** _ _ **/** _ **3**
  1-10V
- **2141** _ _ **/** _ **Z**
  Casambi

Materials
Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate. Canopy: Steel.

Light Source and electronics
20 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz


Packaging
2 Boxes
Total Vol 0,5850 m³
Gross weight 10,3 Kg Net weight 7,4 Kg

Notes
- **2141-14** Built-in accesory (96 mm) chocolate
- **2141-58** Built-in accesory (96 mm) off-white

Surface and built-in fitting

LED IP20 CE EAC Bi-volt
Ø 18,5 cm Only for built-in.

2142



Finishes
- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-white (RAL D2-1109005)

LED temperature colour
- **/1** _ 2700 K D
  CRI >90 12996 lm 144 lm/W
- **/3** _ 3500 K D
  CRI >90 13736 lm 152,6 lm/W

Control
- **2142** _ _ **/** _ **1**
  DALI
- **2142** _ _ **/** _ **3**
  1-10V
- **2142** _ _ **/** _ **Z**
  Casambi

Materials
Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate. Canopy: Steel.

Light Source and electronics
30 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz


Packaging
2 Boxes
Total Vol 0,6239 m³
Gross weight 13,7 Kg Net weight 8,2 Kg

Notes
- **2142-14** Built-in accesory (96 mm) chocolate
- **2142-58** Built-in accesory (96 mm) off-white

Surface and built-in fitting

LED IP20 CE EAC Bi-volt
Ø 18,5 cm Only for built-in.

2143



Finishes
- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-white (RAL D2-1109005)

LED temperature colour
- **/1** _ 2700 K D
  CRI >90 8664 lm 144 lm/W
- **/3** _ 3500 K D
  CRI >90 9157,3 lm 152,6 lm/W

Control
- **2143** _ _ **/** _ **1**
  DALI
- **2143** _ _ **/** _ **3**
  1-10V
- **2143** _ _ **/** _ **Z**
  Casambi

Materials
Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate. Canopy: Steel.

Light Source and electronics
40 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,6600 m³
Gross weight 16,9 Kg Net weight 13 Kg

Notes
- **2143-14** Built-in accesory (96 mm) chocolate
- **2143-58** Built-in accesory (96 mm) off-white

Surface and built-in fitting

LED IP20 CE EAC Bi-volt
Ø 18,5 cm Only for built-in.

Guise

Design by Stefan Diez

Crafted of precision glass and embedded with a row of recessed LEDS, Guise explores the relationship between light and transparency. The light inside the glass appears invisible while the delicately engraved surface radiates an intense glow, the markings beautifully diffusing the light.

Wall



2260


ø 54 cm



2262

ø 92 cm

2260



Finishes

18/ _ _ Graphite
(ADAPTA RF9913WX)

LED temperature colour

/2 _ 3000 K G
CRI >90 445,29 lm 45 lm/W

Control

2260 _ _ **/** _ **6**
Sensor

Materials

Diffuser: Borosilicate glass. LED support: Aluminum.

Light Source and electronics

1 x LED STRIP 24V 10 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging


1 Box 0,69 x 0,69 x 0,09 m
Vol 0,043 m³
Gross weight 7 Kg Net weight 4 Kg

Notes

Electric cable with plug 3 m

LED IP20 CE EAC
Bi-volt Dimmer

2262



Finishes

18/ _ _ Graphite
(ADAPTA RF9913WX)

LED temperature colour

/2 _ 3000 K G
CRI >90 897,71 lm 52 lm/W

Control

2262 _ _ **/** _ **6**
Sensor

Materials

Diffuser: Borosilicate glass. LED support: Aluminum.

Light Source and electronics

1 x LED STRIP 24V 17,2 W.
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 1,04 x 1,04 x 0,10 m
Vol 0,104 m³
Gross weight 16,5 Kg Net weight 11,58 Kg

Notes

Electric cable with plug 3 m

LED IP20 CE EAC
Bi-volt Dimmer

Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 | 10 | /1 | A

Model
Finish
LED temperature colour
Control



Pendants

2270



ø 16 cm

2271




ø 16 cm

2272



ø 16 cm

2275

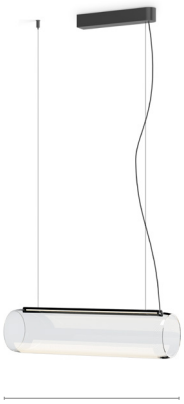

63 cm

2277



89 cm

2282




ø 25 cm

2284




ø 25 cm

2288



ø 40 cm

2270



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED temperature colour
/2 _ 3000 K G
CRI >90 1097,74 lm 55 lm/W

Control
2270 _ _ **/** _ **1**
DALI-2
2270 _ _ **/** _ **6**
Sensor
2270 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Borosilicate glass. Body: Aluminum.


Light Source and electronics
1 x LED STRIP 24V 20 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,87 x 0,35 x 0,37 m
Vol 0,113 m³
Gross weight 6,5 Kg Net weight 5 Kg

Notes
Extra cable length.

LED IP20 EAC Bi-volt Dimmer

2271



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED temperature colour
/2 _ 3000 K G
CRI >90 3484,8 lm 87,12 lm/W

Control
2271 _ _ **/** _ **1**
DALI-2
2271 _ _ **/** _ **3**
1-10V

Materials
Diffuser: Borosilicate glass. Body: Aluminum.


Light Source and electronics
2 x LED STRIP 24V 20 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,231 m³
Gross weight 13 Kg Net weight 10 Kg

Notes
Electric cable with plug 2 m.
Extra cable length.
UNTIL STOCK RUNS OUT

LED IP20 EAC Bi-volt Dimmer

2272



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED temperature colour
/2 _ 3000 K G
CRI >90 1097,74 lm 55 lm/W

Control
2272 _ _ **/** _ **6**
Sensor

Materials
Diffuser: Borosilicate glass. LED support: Aluminum.


Light Source and electronics
1 x LED STRIP 24V 20 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,45 x 0,80 x 0,20 m
Vol 0,0072 m³
Gross weight 16,10 Kg Net weight 16,10 Kg

Notes
Extra cable length.

LED IP20 EAC Bi-volt

2275



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED temperature colour
/2 _ 3000 K G
CRI >90 1404,68 lm 47 lm/W

Control
2275 _ _ **/** _ **1**
DALI-2
2275 _ _ **/** _ **6**
Sensor

Materials
Diffuser: Borosilicate glass. Body: Aluminum.


Light Source and electronics
1 x LED STRIP 24V 20 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,87 x 0,35 x 0,37 m
Vol 0,113 m³
Gross weight 6,5 Kg Net weight 5 Kg

Notes
Extra cable length.
UNTIL STOCK RUNS OUT

LED IP20 EAC Bi-volt Dimmer

2277



Finishes

18/ _ _ Graphite
(ADAPTA RF9913WX)

LED temperature colour

/2 _ 3000 K G
CRI >90 1404,68 lm 47 lm/W

Control

2277 _ _ **/** _ **1**
DALI-2

2277 _ _ **/** _ **6**
Sensor

2277 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Borosilicate glass. Body: Aluminum.

Light Source and electronics

1 x LED STRIP 24V 30 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 1,18 x 0,35 x 0,37 m
Vol 0,153 m³
Gross weight 9,5 Kg Net weight 7,5 Kg


Notes

Extra cable length.

LED IP20 CE EAC

Bi-volt Dimmer

2282



Finishes

18/ _ _ Graphite
(ADAPTA RF9913WX)

LED temperature colour

/2 _ 3000 K G
CRI >90 398,74 lm 33 lm/W

Control

2282 _ _ **/** _ **1**
DALI-2

2282 _ _ **/** _ **6**
Sensor

2282 _ _ **/** _ **B**
1-10V, Push

2282 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Borosilicate glass. Body: Aluminum.
Ceiling rose: Steel.

Light Source and electronics

1 x LED STRIP 24V 12 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging


1 Box 0,41 x 0,41 x 0,38 m
Vol 0,0639 m³
Gross weight 3,3 Kg Net weight 2,3 Kg

Notes

Extra cable length.

LED IP20 CE EAC Bi-volt

2284



Finishes

18/ _ _ Graphite
(ADAPTA RF9913WX)

LED temperature colour

/2 _ 3000 K G
CRI >90 398,74 lm 33 lm/W

Control

2284 _ _ **/** _ **1**
DALI-2

2284 _ _ **/** _ **6**
Sensor

2284 _ _ **/** _ **B**
1-10V, Push

2284 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Borosilicate glass. Body: Aluminum.
Ceiling rose: Steel.

Light Source and electronics

1 x LED STRIP 24V 12 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

1 Box 0,41 x 0,41 x 0,56 m
Vol 0,0941 m³
Gross weight 6,2 Kg Net weight 5,2 Kg


Notes

Extra cable length.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

2288



Finishes

18/ _ _ Graphite
(ADAPTA RF9913WX)

LED temperature colour

/2 _ 3000 K G
CRI >90 868,87 lm 48 lm/W

Control

2288 _ _ **/** _ **1**
DALI-2

2288 _ _ **/** _ **6**
Sensor

2288 _ _ **/** _ **B**
1-10V, Push

2288 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Borosilicate glass. Body: Aluminum.
Ceiling rose: Steel.

Light Source and electronics

1 x LED STRIP 24V 18 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

1 Box 0,56 x 0,56 x 0,46 m
Vol 0,1443 m³
Gross weight 11,7 Kg Net weight 9,7 Kg

Notes

Extra cable length.

LED IP20 CE EAC

Ceiling

2292

ø 25 cm




2294

ø 25 cm




2298

ø 40 cm



2292





Finishes

18/ _ _ Graphite
(ADAPTA RF9913WX)

LED temperature colour

/2 _ 3000 K G
CRI >90 398,74 lm 33 lm/W

Control

2292 _ _ **/** _ **1**
DALI-2

2292 _ _ **/** _ **B**
1-10V, Push

2292 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Borosilicate glass. Body: Aluminum.

Light Source and electronics


1 x LED STRIP 24V 12 W
Constant Voltage 24V
110~240V 50/60Hz


Packaging

1 Box 0,41 x 0,41 x 0,33 m
Vol 0,0555 m³
Gross weight 3,2 Kg Net weight 2,2 Kg

LED IP20 EAC Bi-volt

2294





Finishes

18/ _ _ Graphite
(ADAPTA RF9913WX)

LED temperature colour

/2 _ 3000 K G
CRI >90 398,74 lm 33 lm/W

Control

2294 _ _ **/** _ **1**
DALI-2

2294 _ _ **/** _ **B**
1-10V, Push

2294 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Borosilicate glass. Body: Aluminum.

Light Source and electronics

1 x LED STRIP 24V 12 W
Constant Voltage 24V
110~240V 50/60Hz


Packaging

1 Box 0,41 x 0,41 x 0,51 m
Vol 0,0857 m³
Gross weight 6,1 Kg Net weight 5,1 Kg


Notes

UNTIL STOCK RUNS OUT

LED IP20 EAC Bi-volt

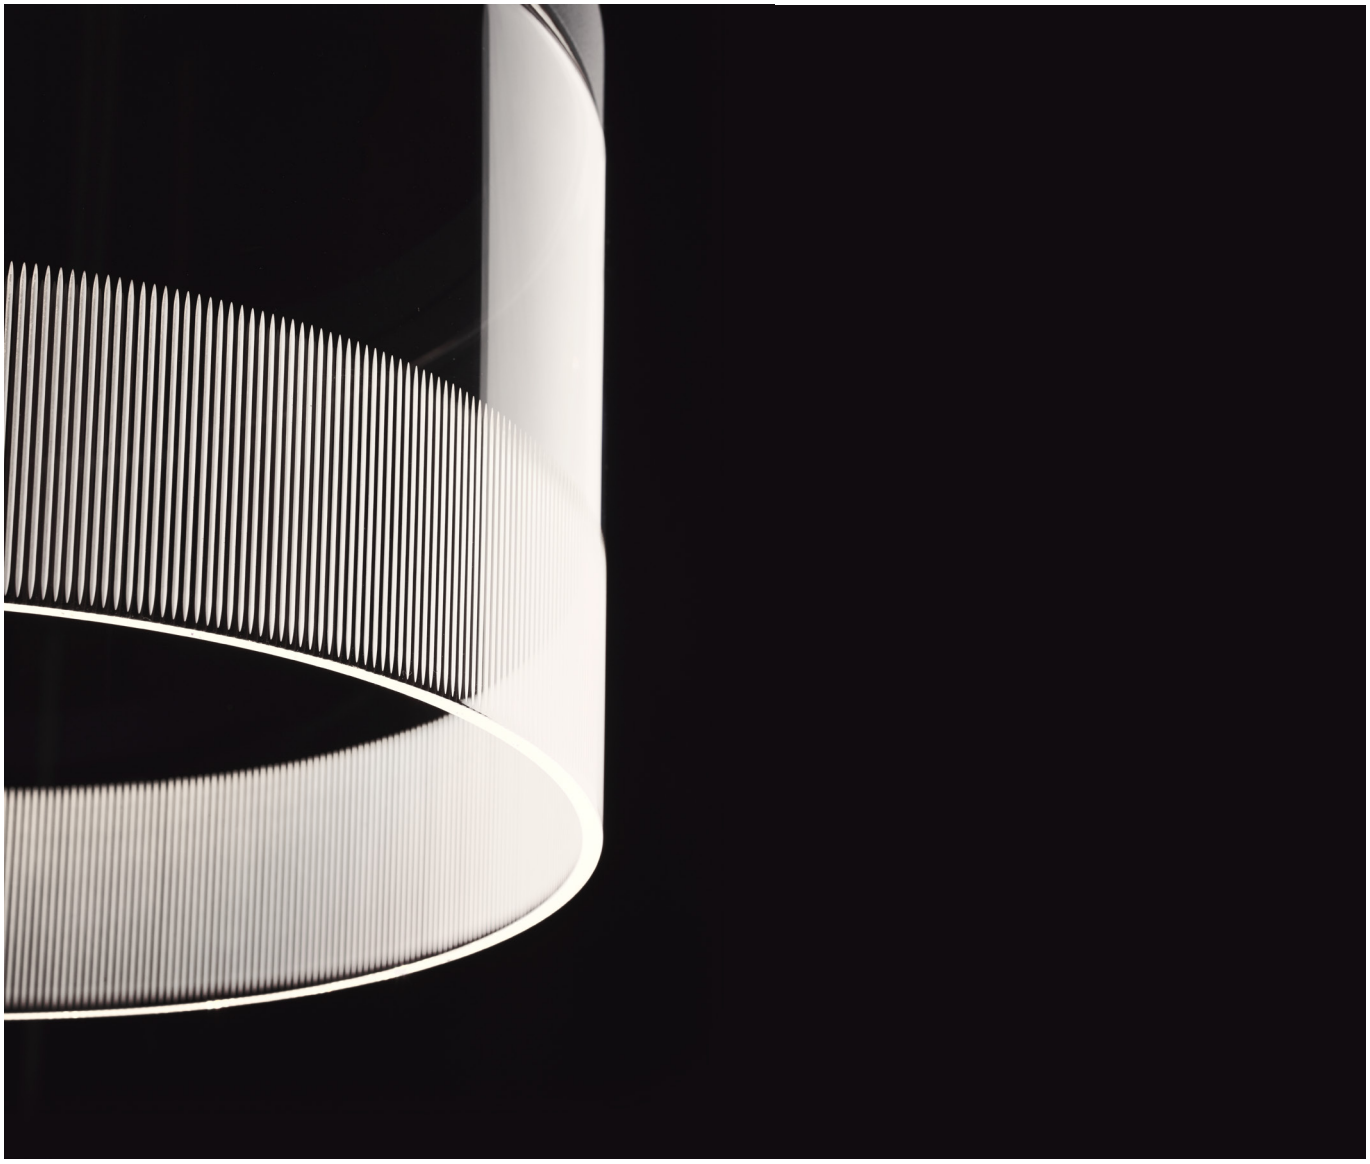

2298



Finishes

18/ _ _ Graphite
(ADAPTA RF9913WX)

LED temperature colour

/2 _ 3000 K G
CRI >90 398,74 lm 22 lm/W

Control

2298 _ _ **/** _ **1**
DALI-2

2298 _ _ **/** _ **B**
1-10V, Push

2298 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Borosilicate glass. Body: Aluminum.

Light Source and electronics

1 x LED STRIP 24V 18 W
Constant Voltage 24V
220~240V 50/60Hz

Packaging

1 Box 0,56 x 0,56 x 0,46 m
Vol 0,1443 m^3
Gross weight 13,3 Kg Net weight 11,3 Kg

LED IP20 EAC

Halo Circular

Design by Martín Azúa

A seamless merging of light and matter, Halo lends the effect of light floating in air. Powered by LED bulbs that remain invisible within their opalized, spherical moulds, the light flows freely from its source.

Pendants



ø 55,5 cm

2330




89 cm

2331



127 cm

2332

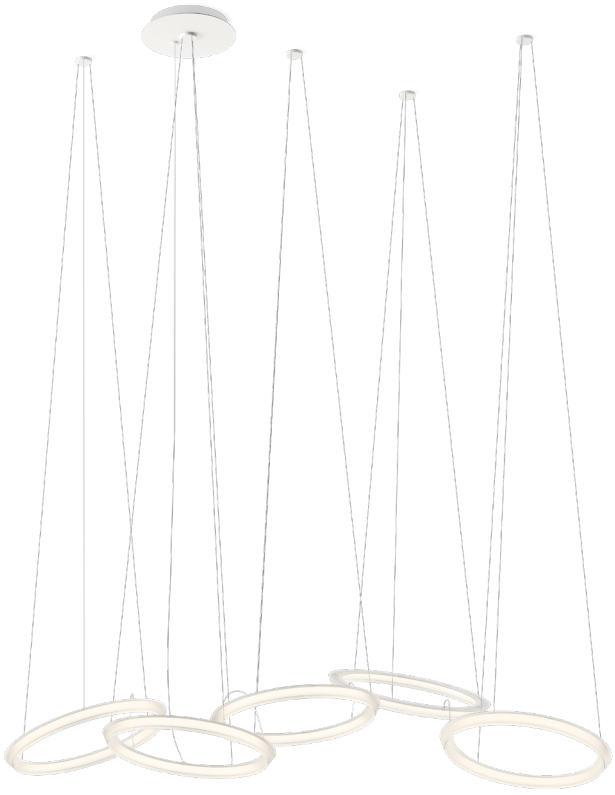


197 cm

2333


1160 | 10 | /1 | A

Model
Finish
LED temperature colour
Control

Each project is unique.
Personalise your own
Halo composition
quick and easy.

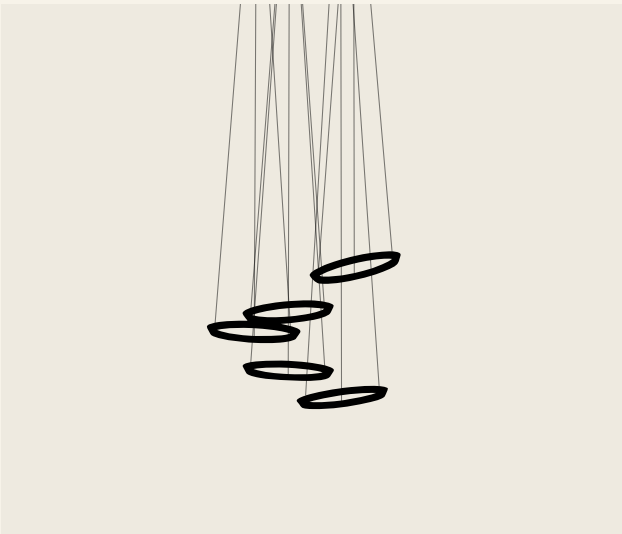




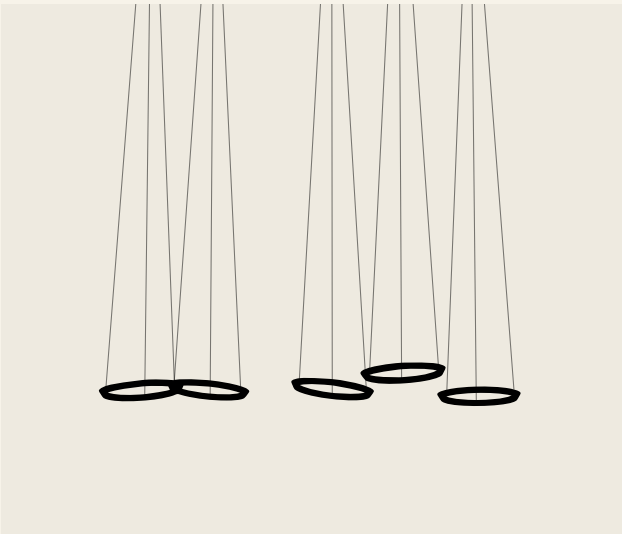



2330



Finishes
03/ _ _ White
(RAL 9016)

LED temperature colour
/1 _ 2700 K G
CRI >90 1904 lm 82 lm/W
/2 _ 3000 K G
CRI >80 1726,78 lm 75 lm/W

Control
2330 _ _ **/** _ **1**
DALI
2330 _ _ **/** _ **3**
1-10V
2330 _ _ **/** _ **Z**
Casambi


Materials
Diffuser: PMMA. Canopy: Steel

Light Source and electronics
1 x LED STRIP 24V 23 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging
1 Box 0,60 x 0,60 x 0,27 m
Vol 0,0972 m³
Gross weight 5,75 Kg Net weight 3,75 Kg

LED IP20 CE EAC Multi-volt

2331



Finishes
03/ _ _ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K G
CRI >90 3808 lm 82 lm/W
/2 _ 3000 K G
CRI >80 3453,56 lm 75 lm/W

Control
2331 _ _ **/** _ **1**
DALI
2331 _ _ **/** _ **3**
1-10V
2331 _ _ **/** _ **Z**
Casambi


Materials
Diffuser: PMMA. Canopy: Steel

Light Source and electronics
2 x LED STRIP 24V 23 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging
1 Box 0,60 x 0,60 x 0,27 m
Vol 0,0972 m³
Gross weight 10,25 Kg Net weight 6,25 Kg

LED IP20 CE EAC Multi-volt

2332



Finishes
03/ _ _ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K G
CRI >90 5712 lm 82 lm/W
/2 _ 3000 K G
CRI >80 5180,34 lm 75 lm/W

Control
2332 _ _ **/** _ **1**
DALI
2332 _ _ **/** _ **3**
1-10V
2332 _ _ **/** _ **Z**
Casambi


Materials
Diffuser: PMMA. Canopy: Steel

Light Source and electronics
3 x LED STRIP 24V 23 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging
1 Box 0,60 x 0,60 x 0,27 m
Vol 0,0972 m³
Gross weight 14,75 Kg Net weight 8,75 Kg

LED IP20 CE EAC Multi-volt

2333



Finishes
03/ _ _ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K G
CRI >90 9520 lm 82 lm/W
/2 _ 3000 K G
CRI >80 8633,9 lm 75 lm/W

Control
2333 _ _ **/** _ **1**
DALI
2333 _ _ **/** _ **3**
1-10V
2333 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: PMMA. Canopy: Steel

Light Source and electronics
5 x LED STRIP 24V 23 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1106 m³
Gross weight 23,75 Kg Net weight 13,75 Kg

LED IP20 CE EAC Multi-volt

1160 | 10 | /1 | A

Model
Finish
LED temperature colour
Control



Halo Lineal

Design by Martín Azúa


A seamless merging of light and matter, Halo lends the effect of light floating in air. Powered by LED bulbs that remain invisible within their opalized, linear moulds, the light flows freely from its source.

Pendants




152 cm

2340

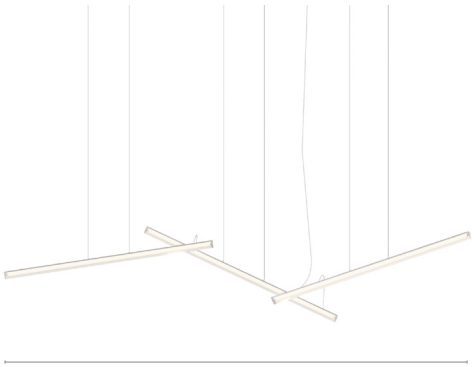


204 cm

2341

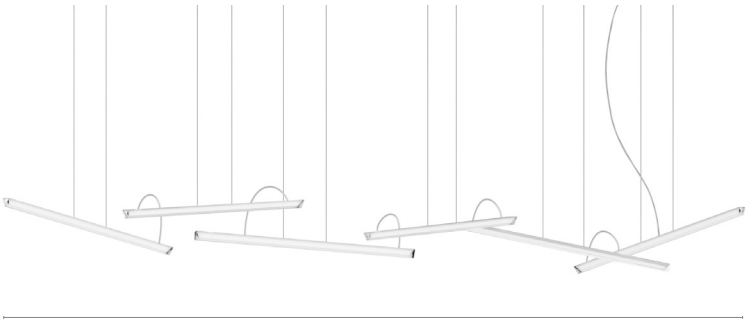

336 cm


2342

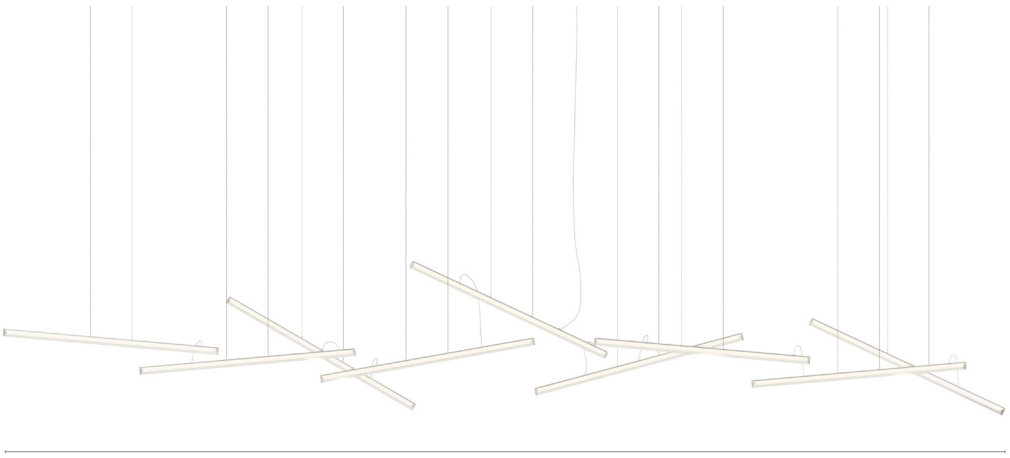



500 cm


2343

Each project is unique.
Personalise your own
Halo composition
quick and easy.

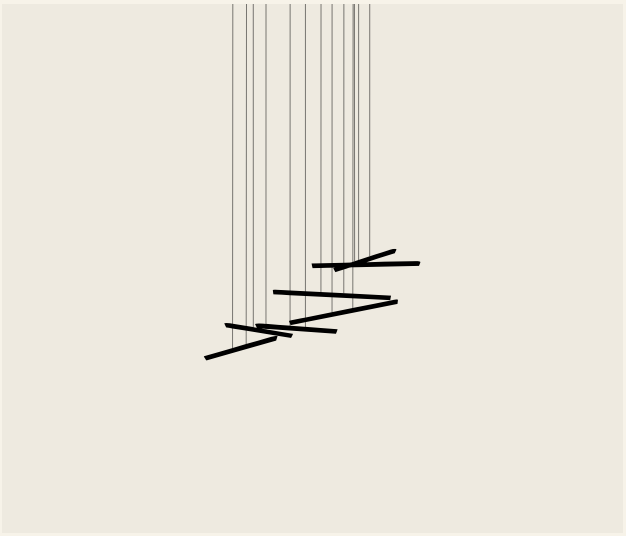


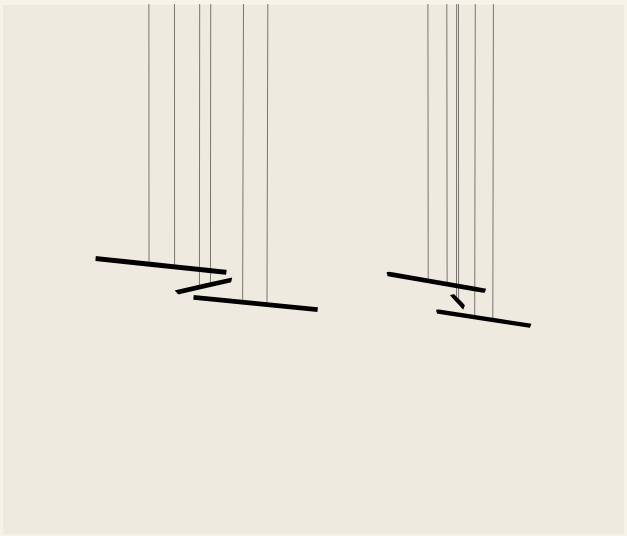

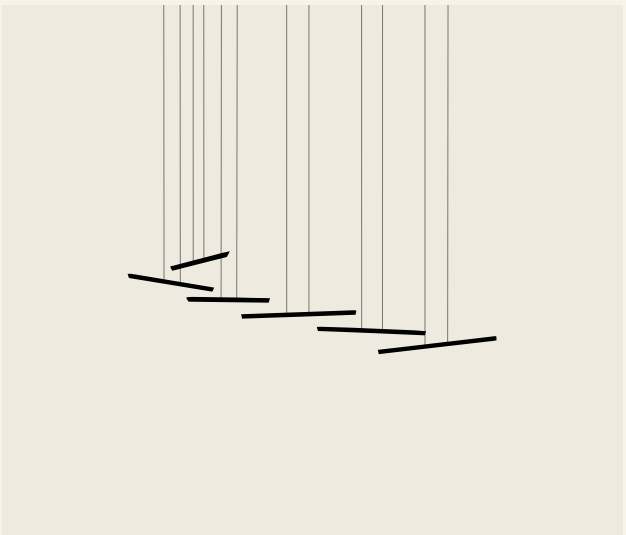

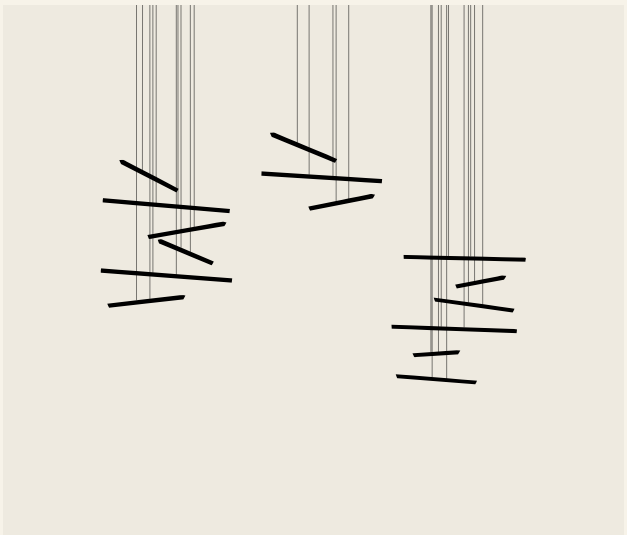

2340



Finishes
03/ _ _ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K F
CRI >90 2831 lm 94 lm/W
/2 _ 3000 K G
CRI >80 2567,18 lm 84 lm/W

Control
2340 _ _ **/** _ **1**
DALI
2340 _ _ **/** _ **3**
1-10V
2340 _ _ **/** _ **Z**
Casambi


Materials
Diffuser: PMMA. Canopy: Steel

Light Source and electronics
2 x LED STRIP 24V 15,3 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0753 m³
Gross weight 6,2 Kg Net weight 5,58 Kg

LED IP20 CE EAC Multi-volt

2341



Finishes
03/ _ _ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K F
CRI >90 4246 lm 94 lm/W
/2 _ 3000 K G
CRI >80 3850,77 lm 84 lm/W

Control
2341 _ _ **/** _ **1**
DALI
2341 _ _ **/** _ **3**
1-10V
2341 _ _ **/** _ **Z**
Casambi


Materials
Diffuser: PMMA. Canopy: Steel

Light Source and electronics
3 x LED STRIP 24V 15,3 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0753 m³
Gross weight 7,3 Kg Net weight 6,57 Kg

LED IP20 CE EAC Multi-volt

2342



Finishes
03/ _ _ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K F
CRI >90 8492 lm 94 lm/W
/2 _ 3000 K G
CRI >80 7701,54 lm 84 lm/W

Control
2342 _ _ **/** _ **1**
DALI
2342 _ _ **/** _ **3**
1-10V
2342 _ _ **/** _ **Z**
Casambi


Materials
Diffuser: PMMA. Canopy: Steel

Light Source and electronics
6 x LED STRIP 24V 15,3 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0756 m³
Gross weight 11,8 Kg Net weight 10,25 Kg

LED IP20 CE EAC Multi-volt

2343



Finishes
03/ _ _ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K F
CRI >90 12739 lm 94 lm/W
/2 _ 3000 K G
CRI >80 11552,31 lm 84 lm/W

Control
2343 _ _ **/** _ **1**
DALI
2343 _ _ **/** _ **3**
1-10V
2343 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: PMMA. Canopy: Steel

Light Source and electronics
9 x LED STRIP 24V 15,3 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0756 m³
Gross weight 16,20 Kg Net weight 14,75 Kg

LED IP20 CE EAC Multi-volt

1160 | 10 | /1 | A

Model
Finish
LED temperature colour
Control




Halo Jewel

Design by Martín Azúa

Subtle light floating in the air and delicately
suspended by a perfectly crafted steel structure.
Light and matter in one.


Pendants

2350

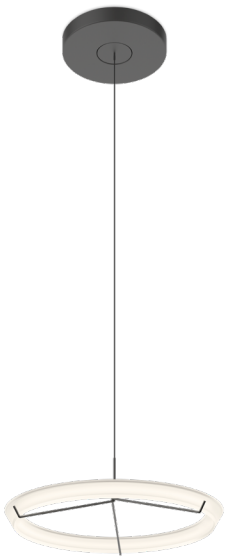


ø 56,3 cm

2351

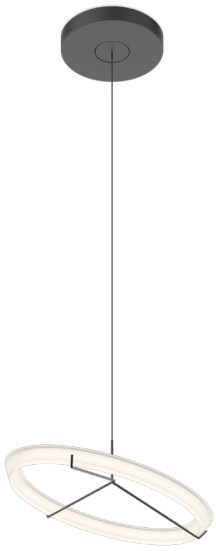


ø 56,3 cm

2355

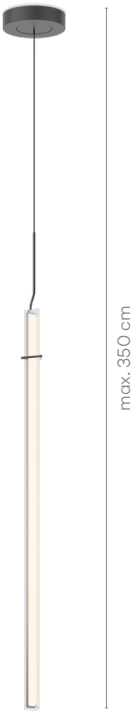

2356



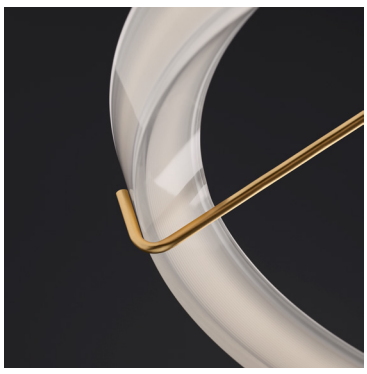




Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 10 /1 A _18

Model
Finish
LED temperature colour
Control
Electrical connection
Only for pendants

2350

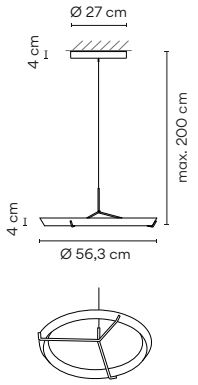

Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K G
CRI >90 1904 lm 83 lm/W

/2 _ 3000 K F
CRI >80 2024 lm 88 lm/W

Control

2350 _ _ **/** _ **1**
DALI

2350 _ _ **/** _ **3**
1-10V

2350 _ _ **/** _ **Z**
Casambi

Finishes

20/ _ _ Gold
(Gold)

LED Colour Temperature

/1 _ 2700 K G
CRI >90 1904 lm 83 lm/W

/2 _ 3000 K F
CRI >80 2024 lm 88 lm/W

Control

2350 _ _ **/** _ **1**
DALI

2350 _ _ **/** _ **3**
1-10V

2350 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Methacrylate. LED support: Aluminum.
Pendant structure: Steel. Ceiling rose: Steel.

Light Source and electronics

1 x LED STRIP 24V 23 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging

1 Box 0,6 x 0,6 x 0,27 m
Vol 0,097 m³
Gross weight 7 Kg Net weight 6,35 Kg

Notes


Extra cable length.

LED IP20 EAC Multi-volt

Electrical connection

Surface
_18 Free Wire
_23 Built-in
_31 Remote
Micro
for plaster ceilings
_32 Remote
XXS
for all types of drop ceilings

2351

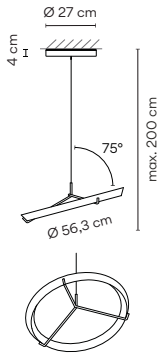

Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K G
CRI >90 1904 lm 83 lm/W

/2 _ 3000 K F
CRI >80 2024 lm 88 lm/W

Control

2351 _ _ **/** _ **1**
DALI

2351 _ _ **/** _ **3**
1-10V

2351 _ _ **/** _ **Z**
Casambi

Finishes

20/ _ _ Gold
(Gold)

LED Colour Temperature

/1 _ 2700 K G
CRI >90 1904 lm 83 lm/W

/2 _ 3000 K F
CRI >80 2024 lm 88 lm/W

Control

2351 _ _ **/** _ **1**
DALI

2351 _ _ **/** _ **3**
1-10V

2351 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Methacrylate. LED support: Aluminum.
Pendant structure: Steel. Ceiling rose: Steel.

Light Source and electronics

1 x LED STRIP 24V 23 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging

1 Box 0,6 x 0,6 x 0,27 m
Vol 0,097 m³
Gross weight 7 Kg Net weight 6,35 Kg

Notes

Extra cable length.

LED IP20 EAC Multi-volt

Electrical connection


Surface
_18 Free Wire
_23 Built-in
_31 Remote
Micro
for plaster ceilings
_32 Remote
XXS
for all types of drop ceilings

1160 | 10 | /1 | A | _18

Model
Finish
LED temperature colour
Control
Electrical connection
Only for pendants

Electrical connection
Surface
_18 Free Wire
_23 Built-in
_31 Remote Micro for plaster ceilings
_32 Remote XXS for all types of drop ceilings

2355



Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K F
CRI >90 1415 lm 94 lm/W
/2 _ 3000 K F
CRI >80 1224 lm 80 lm/W

Control
2355 _ _ **/** _ **1**
DALI
2355 _ _ **/** _ **3**
1-10V
2355 _ _ **/** _ **Z**
Casambi

Finishes
20/ _ _ Gold
(Gold)

LED Colour Temperature
/1 _ 2700 K F
CRI >90 1415 lm 94 lm/W
/2 _ 3000 K F
CRI >80 1224 lm 80 lm/W

Control
2355 _ _ **/** _ **1**
DALI
2355 _ _ **/** _ **3**
1-10V
2355 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Methacrylate. LED support: Aluminum.
Pendant structure: Steel. Ceiling rose: Steel.


Light Source and electronics
1 x LED STRIP 24V 15,3 W
Constant Voltage 24V
220~240V 50/60Hz

Packaging
1 Box 0,13 x 0,19 x 1,265 m
Vol 0,0312 m³
Gross weight 5 Kg Net weight 4,1 Kg

Notes
Extra cable length.

LED IP20 CE EAC
Dimmer Bi-volt

2356



Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K F
CRI >90 4246 lm 94 lm/W
/2 _ 3000 K F
CRI >80 3672 lm 80 lm/W

Control
2356 _ _ **/** _ **1**
DALI
2356 _ _ **/** _ **3**
1-10V
2356 _ _ **/** _ **Z**
Casambi

Finishes
20/ _ _ Gold
(Gold)

LED Colour Temperature
/1 _ 2700 K F
CRI >90 4246 lm 94 lm/W
/2 _ 3000 K F
CRI >80 3672 lm 80 lm/W

Control
2356 _ _ **/** _ **1**
DALI
2356 _ _ **/** _ **3**
1-10V
2356 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Methacrylate. LED support: Aluminum.
Pendant structure: Steel. Ceiling rose: Steel.

Light Source and electronics
3 x LED STRIP 24V 15,3 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging
1 Box 0,31 x 0,33 x 2 m
Vol 0,2046 m³
Gross weight 7,4 Kg Net weight 6,06 Kg

Notes
Extra cable length.


LED IP20 CE EAC
Dimmer Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.



Composing pendants


Next sketches are composed by one or more compositions

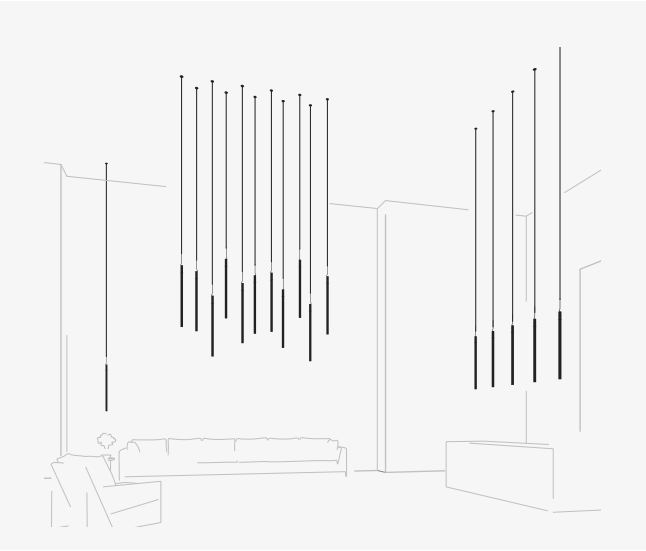

17 x 2355.



1 x 2350 and 2 x 2351.

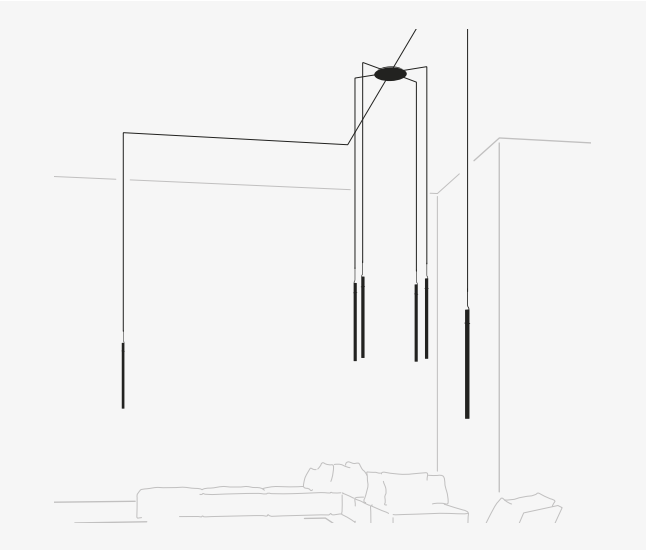

6 x 2355.

Each project is unique. Visit vibia.com and chose among multiple compositions designed and adapted to your project needs.

Personalise your own Halo composition quick and easy at vibia.com



Electrical connection options for models 2350 / 2351 / 2355

Choose your preferred installation option accordingto your needs.
For each composition, the optimal minimum number of drivers will be delivered.

Drop ceiling

The innovative remote and built-in fittings accentuate the silkiness and lightness of compositions on suspended ceilings, its great visual grandeur taking center stage.

For Ref. 2350 / 2351 / 2355

Remote



Micro ø 3 cm
height 7 cm
for plaster ceilings. Black finish.





XXS ø 6 cm
height 6 cm
for all types of drop ceilings. Match with fixture finish.

Built-in



ø 8 cm
height 6 cm
match with fixture finish.







Regular ceiling

When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.

For Ref. 2350 / 2351


Surface




ø 27 cm

match with fixture finish.


Free Wire



ø 22 cm



ø 36 cm



ø 40 cm

For Ref. 2355


Surface




ø 16 cm

match with fixture finish.


Free Wire



ø 20 cm





ø 36 cm



ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendants.






Halo Wall

Design by Martín Azúa


A seamless merging of light and matter, Halo Wall lends the effect of light floating in the air and bathing the walls. A feature piece which creates subtle, magical light.

Wall

2360

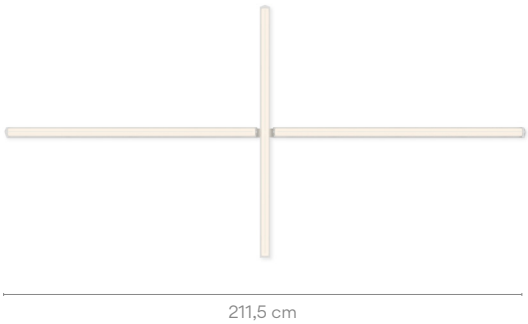


2361

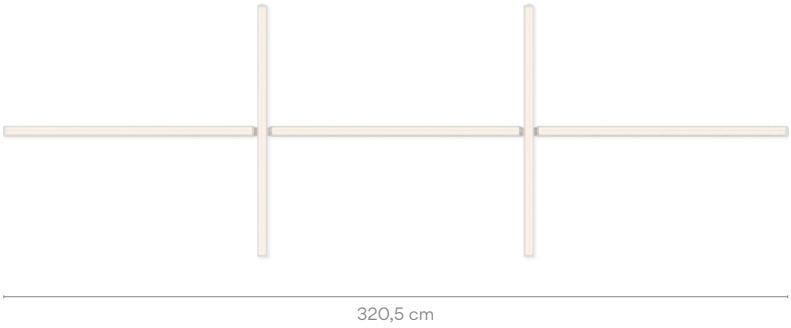

2362

2360



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **13/** _ _ Warm White (NCS S 1000-N)

LED Colour Temperature

/1 _ 2700 K F
CRI >90 1415 lm 94 lm/W

/2 _ 3000 K F
CRI >80 1224 lm 80 lm/W

Control

2360 _ _ **/** _ **1**
DALI

2360 _ _ **/** _ **3**
1-10V

2360 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Methacrylate. LED support: Aluminum.

Light Source and electronics

1 x LED STRIP 24V 15,3 W
Constant Voltage 24V
220~240V 50/60Hz


Packaging

1 Box 0,10 x 1,025 x 0,10 m
Vol 0,01 m³
Gross weight 2,25 Kg Net weight 1,75 Kg

LED IP20 CE EAC

Product specifications subject to change without notice. Please check vibia.com for updated information.

2361



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **13/** _ _ Warm White (NCS S 1000-N)

LED Colour Temperature

/1 _ 2700 K F
CRI >90 1415 lm 94 lm/W

/2 _ 3000 K F
CRI >80 3672 lm 80 lm/W

Control

2361 _ _ **/** _ **1**
DALI

2361 _ _ **/** _ **3**
1-10V

2361 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Methacrylate. LED support: Aluminum.

Light Source and electronics

3 x LED STRIP 24V 15,3 W
Constant Voltage 24V
220~240V 50/60Hz

Packaging

1 Box 0,15 x 2,20 x 0,15 m
Vol 0,05 m³
Gross weight 5,5 Kg Net weight 4,5 Kg


Notes

The rotation around a central axis allows for movement of the light sticks in the desired position: perpendicular, vertical, diagonal and progressive, creating wall arts in the space.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC

2362



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **13/** _ _ Warm White (NCS S 1000-N)

LED Colour Temperature

/1 _ 2700 K F
CRI >90 1415 lm 94 lm/W

/2 _ 3000 K F
CRI >80 6120 lm 80 lm/W

Control

2362 _ _ **/** _ **1**
DALI

2362 _ _ **/** _ **3**
1-10V

2362 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Methacrylate. LED support: Aluminum.

Light Source and electronics

5 x LED STRIP 24V 15,3 W
Constant Voltage 24V
220~240V 50/60Hz

Packaging

1 Box 0,15 x 3,40 x 0,15 m
Vol 0,077 m³
Gross weight 9,5 Kg Net weight 7,5 Kg

Notes

The rotation around a central axis allows for movement of the light sticks in the desired position: perpendicular, vertical, diagonal and progressive, creating wall arts in the space.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC





Cosmos

Design by Lievore, Altherr, Molina

Design and light become one with Cosmos pendant. Flattened spheres in suspension that naturally descend from the ceiling and use light to draw a fluctuating course like a constellation of stars.

Pendants



ø 19 cm

2500



ø 27 cm

2501



ø 48 cm

2502



55 cm

2510



55 cm

2511



76 cm


2515



86 cm

2516

2500



Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **62/** _ _ Green (PANTONE 5645)
- **66/** _ _ Light-grey (PANTONE 403)

LED temperature colour

/1 _ 2700 K E
CRI >80 485 lm 121 lm/W

/3 _ 3500 K E
CRI >90 512,6 lm 128,2 lm/W

Control

2500 _ _ **/** _ **0**
On/ Off

2500 _ _ **/** _ **1**
DALI-2

2500 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Body: ABS.
Canopy Plate: Steel.

Light Source and electronics

1 x LED 4,5 W 350mA
Constant Current 350 mA
/ 10: 100~240V 50/60Hz
/ 1B: 110~240V 50/60Hz

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0180 m^3
Gross weight 1,62 Kg Net weight 1,18 Kg


Notes

Extra cable length.

LED IP20 CE EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

2501



Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **62/** _ _ Green (PANTONE 5645)
- **66/** _ _ Light-grey (PANTONE 403)

LED temperature colour

/1 _ 2700 K E
CRI >80 485 lm 121 lm/W

/3 _ 3500 K E
CRI >90 512,6 lm 128,2 lm/W

Control

2501 _ _ **/** _ **0**
On/ Off

2501 _ _ **/** _ **1**
DALI-2

2501 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Body: ABS.
Canopy Plate: Steel.

Light Source and electronics

1 x LED 4,5 W 350mA
Constant Current 350 mA
/ 10: 100~240V 50/60Hz
/ 1B: 110~240V 50/60Hz

Packaging


1 Box 0,42 x 0,42 x 0,25 m
Vol 0,0441 m³
Gross weight 2,54 Kg Net weight 1,44 Kg

Notes

Extra cable length.

LED IP20 CE EAC Bi-volt

2502



Finishes

- **03/** _ _ White (RAL 9010)

LED temperature colour

/1 _ 2700 K E
CRI >80 485 lm 121 lm/W

/3 _ 3500 K E
CRI >90 512,6 lm 128,2 lm/W

Control

2502 _ _ **/** _ **1**
DALI-2

2502 _ _ **/** _ **B**
1-10V, Push

2502 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Body: Polyurethane.
Canopy Plate: Steel.

Light Source and electronics

1 x LED 4,5 W 350 mA.
1 x LED 1 W 350 mA.
Constant Current 350 mA
110~240V 50/60Hz

Packaging


1 Box 0,60 x 0,60 x 0,27 m
Vol 0,0970 m³
Gross weight 5,58 Kg Net weight 3,15 Kg

Notes

Extra cable length.

LED IP20 CE EAC Bi-volt

2510



Finishes

- **62/** _ _ Green , Chocolate and Light-grey (PANTONE 5645, RAL 8019, PANTONE 403)

LED temperature colour

/1 _ 2700 K E
CRI >80 1455 lm 121 lm/W

/3 _ 3500 K E
CRI >90 1537,8 lm 128,2 lm/W

Control

2510 _ _ **/** _ **A**
DALI-2, 1-10V, Push

2510 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Body: ABS.
Canopy Plate: Steel.

Light Source and electronics

3 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging


1 Box 0,60 x 0,60 x 0,27 m
Vol 0,0970 m³
Gross weight 7,54 Kg Net weight 5,11 Kg

Notes

Compositions and finishes can not be changed
Extra cable length.

LED IP20 CE EAC Bi-volt

2511



Finishes

62/ _ _ Green, White and Chocolate (PANTONE 5645, RAL 9010, RAL 8019

66/ _ _ Light-grey, White and Chocolate (PANTONE 403, RAL 9010, RAL 8019)

LED temperature colour

/1 _ 2700 K E
CRI >80 1455 lm 121 lm/W

/3 _ 3500 K E
CRI >90 1537,8 lm 128,2 lm/W

Control

2511 _ _ **/** _ **A**
DALI-2, 1-10V, Push

2511 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Body: ABS + Polyurethane.
Canopy Plate: Steel.

Light Source and electronics

3 x LED 4,5 W 350 mA
1 x LED 1 W 350 mA.
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,60 x 0,60 x 0,27 m
Vol 0,0970 m^3
Gross weight 9,25 Kg Net weight 6,82 Kg


Notes

Compositions and finishes can not be changed

Extra cable length.

LED IP20 CE EAC Bi-volt

2515



Finishes

62/ _ _ Green , Chocolate and Light-grey (PANTONE 5645, RAL 8019, PANTONE 403)

LED temperature colour

/1 _ 2700 K E
CRI >80 1940 lm 121 lm/W

/3 _ 3500 K E
CRI >90 2050,5 lm 128,2 lm/W

Control

2515 _ _ **/** _ **A**
DALI-2, 1-10V, Push

2515 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Body: ABS.
Canopy Plate: Steel.

Light Source and electronics

4 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,76 x 0,76 x 0,27 m
Vol 0,1560 m^3
Gross weight 10,94 Kg Net weight 7,04 Kg


Notes

Compositions and finishes can not be changed

Extra cable length.

LED IP20 CE EAC Bi-volt

2516



Finishes

62/ _ _ Green, White and Chocolate (PANTONE 5645, RAL 9010, RAL 8019

LED temperature colour

/1 _ 2700 K E
CRI >80 1940 lm 121 lm/W

Control

2516 _ _ **/** _ **A**
DALI-2, 1-10V, Push

2516 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Body: ABS + Polyurethane.
Canopy Plate: Steel.

Light Source and electronics

4 x LED 4,5 W 350 mA
2x LED 1 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,73x0,73x0,32 m
Vol 0,1705 m^3
Gross weight 14,62 Kg Net weight 15,5 Kg

Notes

Compositions and finishes can not be changed

Extra cable length.

LED IP20 CE EAC Bi-volt

1160 | 10 | /1 | A

Model
Finish
LED temperature colour
Control



Structural

Design by Arik Levy

Structural's cubic forms pair with slender metal rods that both join and separate the volumes, providing points of light connected in space. Its design deconstructs the light source and casts it in unexpected places, creating scultptural pieces integrated in the architecture.

Wall

2600

16 cm



2602

26 cm



2610

120 cm



2612

240 cm



2615

180 cm




2617

84 cm




2620

87 cm 56 cm



2600



Finishes

21/ _ _ Black Grey
(NCS S 7000-N)

15/ _ _ Grey L2
(NCS S 2500-N)

Finish customization
(Available options:
Vibia colour palette)

LED Colour Temperature

/1 _ 2700 K F
CRI >90 700 lm 117 lm/W

/2 _ 3000 K E
CRI >90 756,73 lm 126 lm/W

/3 _ 3500 K E
CRI >90 763,3 lm 127,2 lm/W

Control

2600 _ _ **/** _ **1**
DALI-2

2600 _ _ **/** _ **3**
1-10V

2600 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 6 W
Constant Voltage 24V
110~240V 50/60Hz


Packaging

1 Box 0,4 x 0,4 x 0,2 m
Vol 0,032 m^3
Gross weight 1,35 Kg Net weight 0,9 Kg

LED IP20 CE EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

2602



Finishes

21/ _ _ Black Grey
(NCS S 7000-N)

15/ _ _ Grey L2
(NCS S 2500-N)

Finish customization
(Available options:
Vibia colour palette)

LED Colour Temperature

/1 _ 2700 K F
CRI >90 1400 lm 117 lm/W

/2 _ 3000 K E
CRI >90 1513,46 lm 126 lm/W

/3 _ 3500 K E
CRI >90 1526,5 lm 127,2 lm/W

Control

2602 _ _ **/** _ **1**
DALI-2

2602 _ _ **/** _ **3**
1-10V

2602 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

2 x LED PLATE 24V 6 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging


1 Box 0,4 x 0,4 x 0,2 m
Vol 0,032 m³
Gross weight 2,85 Kg Net weight 1,9 Kg

Notes

* Electrical connection point.

LED IP20 EAC Bi-volt

2610



Finishes

21/ _ _ Black Grey
(NCS S 7000-N)

15/ _ _ Grey L2
(NCS S 2500-N)

Finish customization
(Available options:
Vibia colour palette)

LED Colour Temperature

/1 _ 2700 K F
CRI >90 1400 lm 117 lm/W

/2 _ 3000 K E
CRI >90 1513,46 lm 126 lm/W

/3 _ 3500 K E
CRI >90 1526,5 lm 127,2 lm/W

Control

2610 _ _ **/** _ **1**
DALI-2

2610 _ _ **/** _ **3**
1-10V

2610 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 6 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,036 m³
Gross weight 3,6 Kg Net weight 2,4 Kg

Notes

* Electrical connection point.

LED IP20 EAC Bi-volt

2612



Finishes

21/ _ _ Black Grey
(NCS S 7000-N)

15/ _ _ Grey L2
(NCS S 2500-N)

Finish customization
(Available options:
Vibia colour palette)

LED Colour Temperature

/1 _ 2700 K F
CRI >90 1400 lm 117 lm/W

/2 _ 3000 K E
CRI >90 1513,46 lm 126 lm/W

/3 _ 3500 K E
CRI >90 1526,5 lm 127,2 lm/W

Control

2612 _ _ **/** _ **1**
DALI-2

2612 _ _ **/** _ **3**
1-10V

2612 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

2 x LED PLATE 24V 6 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,042 m³
Gross weight 3,9 Kg Net weight 2,6 Kg

Notes

* Electrical connection point.

LED IP20 EAC Bi-volt

2615



Finishes

- **21/** _ _ Black Grey (NCS S 7000-N)
- **15/** _ _ Grey L2 (NCS S 2500-N)

Finish customization (Available options: Vibia colour palette)

LED Colour Temperature

- **/1** _ 2700 K F — CRI >90 1400 lm 117 lm/W
- **/2** _ 3000 K E — CRI >90 1513,46 lm 126 lm/W
- **/3** _ 3500 K E — CRI >90 1526,5 lm 127,2 lm/W

Control

- **2615** _ _ **/** _ **1** — DALI-2
- **2615** _ _ **/** _ **3** — 1-10V
- **2615** _ _ **/** _ **Z** — Casambi

Materials

Diffuser: Polycarbonate. Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

2 x LED PLATE 24V 6 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,038 m³
Gross weight 4,35 Kg Net weight 2,9 Kg

Notes

* Electrical connection point.

LED IP20 CE EAC Bi-volt

2617



Finishes

- **21/** _ _ Black Grey (NCS S 7000-N)
- **15/** _ _ Grey L2 (NCS S 2500-N)

Finish customization (Available options: Vibia colour palette)

LED Colour Temperature

- **/1** _ 2700 K F — CRI >90 1400 lm 117 lm/W
- **/2** _ 3000 K E — CRI >90 1513,46 lm 126 lm/W
- **/3** _ 3500 K E — CRI >90 1526,5 lm 127,2 lm/W

Control

- **2617** _ _ **/** _ **1** — DALI-2
- **2617** _ _ **/** _ **3** — 1-10V
- **2617** _ _ **/** _ **Z** — Casambi

Materials

Diffuser: Polycarbonate. Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

2 x LED PLATE 24V 6 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,041 m³
Gross weight 4,35 Kg Net weight 2,9 Kg

Notes

* Electrical connection point.

LED IP20 CE EAC Bi-volt

2620



Finishes

- **21/** _ _ Black Grey (NCS S 7000-N)
- **15/** _ _ Grey L2 (NCS S 2500-N)

Finish customization (Available options: Vibia colour palette)

LED Colour Temperature

- **/1** _ 2700 K F — CRI >90 1400 lm 117 lm/W
- **/2** _ 3000 K E — CRI >90 1513,46 lm 126 lm/W
- **/3** _ 3500 K E — CRI >90 1526,5 lm 127,2 lm/W

Control

- **2620** _ _ **/** _ **1** — DALI-2
- **2620** _ _ **/** _ **3** — 1-10V
- **2620** _ _ **/** _ **Z** — Casambi

Materials

Diffuser: Polycarbonate. Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

2 x LED PLATE 24V 6 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,0356 m³
Gross weight 3,6 Kg Net weight 2,4 Kg

Notes

* Electrical connection point.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt


1160 | 10 | /1 | A
Model
Finish
LED temperature colour
Control

Ceiling


2630




2632




2634




2640




2642

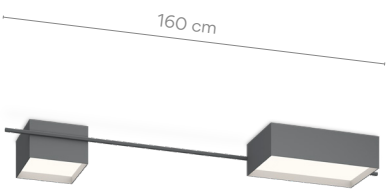


2645

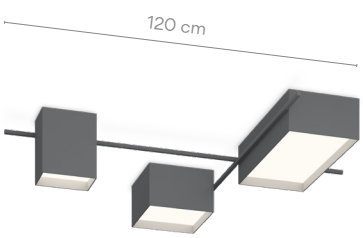

2647

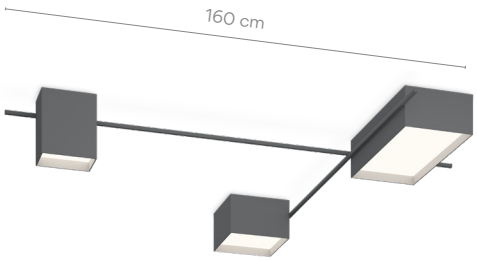

2630



Finishes

21/ _ _ Black Grey
(NCS S 7000-N)

15/ _ _ Grey L2
(NCS S 2500-N)

Finish customization
(Available options:
Vibia colour palette)

LED temperature colour

/2 _ 3000 K E
CRI >90 1078 lm 120 lm/W

/3 _ 3500 K E
CRI >90 1087,3 lm 120,8 lm/W

Control

2630 _ _ **/** _ **1**
DALI-2

2630 _ _ **/** _ **3**
1-10V

2630 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics


1 x LED PLATE 24V 9 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

1 Box 0, 4 x 0,4 x 0,2 m
Vol 0,032 m³
Gross weight 3,75 Kg Net weight 2,5 Kg

LED IP20 EAC Bi-volt

2632



Finishes

- **21/** _ _ Black Grey (NCS S 7000-N)
- **15/** _ _ Grey L2 (NCS S 2500-N)

Finish customization (Available options: Vibia colour palette)

LED temperature colour

/2 _ 3000 K D
CRI >90 2214 lm 148 lm/W

/3 _ 3500 K D
CRI >90 2233,1 lm 148,9 lm/W

Control

2632 _ _ **/** _ **1**
DALI-2

2632 _ _ **/** _ **3**
1-10V

2632 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics


1 x LED PLATE 24V 15 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

1 Box 0,34 x 0,34 x 0,25 m
Vol 0,029 m³
Gross weight 4,35 Kg Net weight 2,9 Kg

LED IP20 CE EAC Bi-volt

2634



Finishes

- **21/** _ _ Black Grey (NCS S 7000-N)
- **15/** _ _ Grey L2 (NCS S 2500-N)

Finish customization (Available options: Vibia colour palette)

LED temperature colour

/2 _ 3000 K D
CRI >90 4428 lm 148 lm/W

/3 _ 3500 K D
CRI >90 4466,2 lm 148,9 lm/W

Control

2634 _ _ **/** _ **1**
DALI-2

2634 _ _ **/** _ **3**
1-10V

2634 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics


1 x LED PLATE 24V 30 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

1 Box 0,58 x 0,34 x 0,23 m
Vol 0,045 m³
Gross weight 5,85 Kg Net weight 3,9 Kg

LED IP20 CE EAC Bi-volt

2640



Finishes

- **21/** _ _ Black Grey (NCS S 7000-N)
- **15/** _ _ Grey L2 (NCS S 2500-N)

Finish customization (Available options: Vibia colour palette)

LED temperature colour

/2 _ 3000 K E
CRI >90 3292 lm 137 lm/W

/3 _ 3500 K E
CRI >90 3320,4 lm 138,3 lm/W

Control

2640 _ _ **/** _ **1**
DALI-2

2640 _ _ **/** _ **3**
1-10V

2640 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 9 W
1 x LED PLATE 24V 15 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging


3 Boxes
Total Vol 0,15 m³
Gross weight 8,25 Kg Net weight 5,5 Kg

Notes

* Electrical connection point.

LED IP20 CE EAC Bi-volt

2642



Finishes

- **21/** _ _ Black Grey (NCS S 7000-N)
- **15/** _ _ Grey L2 (NCS S 2500-N)

Finish customization (Available options: Vibia colour palette)

LED temperature colour

- **/2** _ 3000 K D — CRI >90 6642 lm 148 lm/W
- **/3** _ 3500 K D — CRI >90 6699,3 lm 148,9 lm/W

Control

2642 _ _ **/** _ **1**	DALI-2
2642 _ _ **/** _ **3**	1-10V
2642 _ _ **/** _ **Z**	Casambi

Materials

Diffuser: Polycarbonate. Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 15 W
1 x LED PLATE 24V 30 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging


1 Box 0,25 x 0,60 x 1,7 m
Vol 0,255 m³
Gross weight 11,25 Kg Net weight 7,5 Kg

Notes

* Electrical connection point.

LED IP20 CE EAC Bi-volt

2645



Finishes

- **21/** _ _ Black Grey (NCS S 7000-N)
- **15/** _ _ Grey L2 (NCS S 2500-N

Finish customization (Available options: Vibia colour palette)

LED temperature colour

- **/2** _ 3000 K D — CRI >90 7720 lm 143 lm/W
- **/3** _ 3500 K D — CRI >90 7786,6 lm 144,2lm/W

Control

2645 _ _ **/** _ **1**	DALI-2
2645 _ _ **/** _ **3**	1-10V
2645 _ _ **/** _ **Z**	Casambi

Materials

Diffuser: Polycarbonate. Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 9 W
1 x LED PLATE 24V 15 W
1 x LED PLATE 24V 30 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging


1 Box 0,25 x 1,2 x 1,2 m
Vol 0,42 m³
Gross weight 14,25 Kg Net weight 9,25 Kg

Notes

* Electrical connection point.

LED IP20 CE EAC Bi-volt

2647



Finishes

- **21/** _ _ Black Grey (NCS S 7000-N)
- **15/** _ _ Grey L2 (NCS S 2500-N)

Finish customization (Available options: Vibia colour palette)

LED temperature colour

- **/2** _ 3000 K D — CRI >90 7720 lm 143 lm/W
- **/3** _ 3500 K D — CRI >90 7786,6 lm 144,2 lm/W

Control

2647 _ _ **/** _ **1**	DALI-2
2647 _ _ **/** _ **3**	1-10V
2647 _ _ **/** _ **Z**	Casambi

Materials

Diffuser: Polycarbonate. Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 9 W
1 x LED PLATE 24V 15 W
1 x LED PLATE 24V 30 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

1 Box 0,25 x 1,7 x 1,7 m
Vol 0,72 m³
Gross weight 15,3 Kg Net weight 10,2 Kg

Notes

* Electrical connection point.

LED IP20 CE EAC Bi-volt

Class

Design by Sebastian Herkner


Timeless, elegant and enduring, Class brings the refined, intimate aesthetic of a patio light with the functional performance of a bollard. Rather than silently integrating into the garden environment, it stands handsome and proud, its cylindrical glass luminaire radiating with a soft, diffuse and indirect light.

Outdoor



2810 2815 2800 2805 2820 2825

2800



Finishes

● **11/** _ _ Black
(NCS S 8500-N)

LED temperature colour

/1 _ 2700 K G
CRI >90 1188 lm 198 lm/W

Control

2800 _ _ **/** _ **1**
DALI

2800 _ _ **/** _ **5**
Push

2800 _ _ **/** _ **Z** _ **30**
Casambi (Remote)

Materials

Body: Aluminium. Glass: Borosilicate glass.
Diffuser: Opal polycarbonate.

Light Source and electronics

1 x LED 3,5W 150 mA
Constant Current 150 mA
220~240V. 50/60Hz


Packaging

2 Boxes
Box 1: 0,95 x 0,30 x 0,30 m
Box 2: 0,31 x 0,31 x 0,21 m
Total Vol 0,11 m³
Gross weight 11,6 Kg Net weight 9,6 Kg

LED IP65 EAC

Product specifications subject to change without notice. Please check vibia.com for updated information.

2805



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED temperature colour
/1 _ 2700 K G
CRI >90 2376 lm 198 lm/W

Control
2805 _ _ **/** _ **1**
DALI

2805 _ _ **/** _ **5**
Push

2805 _ _ **/** _ **Z**
Casambi (Remote)


Materials
Body: Aluminium. Glass: Borosilicate glass.
Diffuser: Opal polycarbonate.

Light Source and electronics
2 x LED 3,5W 150 mA
Constant Current 300 mA
220~240V. 50/60Hz

Packaging
2 Boxes
Box 1: 0,95 x 0,30 x 0,30 m
Box 2: 0,31 x 0,31 x 0,21 m
Total Vol 0,11 m³
Gross weight 14,8 Kg Net weight 12,8 Kg

LED IP65 EAC

2810

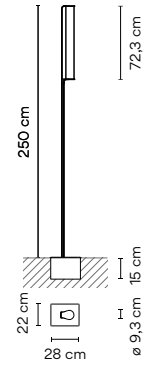

Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED temperature colour
/1 _ 2700 K G
CRI >90 2376 lm 198 lm/W

Control
2810 _ _ **/** _ **1**
DALI

2810 _ _ **/** _ **5**
Push

2810 _ _ **/** _ **Z** _ **30**
Casambi (Remote)


Materials
Body: Aluminium. Glass: Borosilicate glass.
Diffuser: Opal polycarbonate.

Light Source and electronics
1 x LED 7W 300 mA
Constant Current 300 mA
220~240V. 50/60Hz

Packaging
2 Boxes
Box 1: 2,92 x 0,32 x 0,32 m
Box 2: 0,37 x 0,32 x 0,22 m
Total Vol 0,33 m³
Gross weight 20,5 Kg Net weight 17,5 Kg

LED IP65 EAC Dimmer

2815

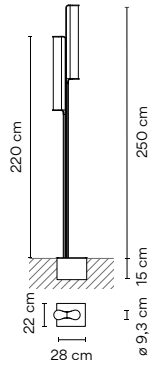

Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED temperature colour
/1 _ 2700 K G
CRI >90 4752 lm 198 lm/W

Control
2815 _ _ **/** _ **1**
DALI

2815 _ _ **/** _ **5**
Push

2815 _ _ **/** _ **Z** _ **30**
Casambi (Remote)

Materials
Body: Aluminium. Glass: Borosilicate glass.
Diffuser: Opal polycarbonate.


Light Source and electronics
2 x LED 7W 300 mA
Constant Current 600 mA
220~240V. 50/60Hz

Packaging
2 Boxes
Box 1: 2,92 x 0,32 x 0,32 m
Box 2: 0,37 x 0,32 x 0,22 m
Total Vol 0,33 m³
Gross weight 28,4 Kg Net weight 25,4 Kg

LED IP65 EAC

1160 | 10 | /1 | A
Model | Finish | LED temperature colour | Control

2820



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED temperature colour
/1 _ 2700 K G
CRI >90 1188 lm 198 lm/W

Control
2820 _ _ **/** _ **1**
DALI-2

2820 _ _ **/** _ **5**
Push

2820 _ _ **/** _ **Z** _ **30**
Casambi (Remote)


Materials
Body: Aluminium. Glass: Borosilicate glass.
Diffuser: Opal polycarbonate.

Light Source and electronics
1 x LED 3,5W 150 mA
Constant Current 150 mA
220~240V. 50/60Hz

Packaging
1 Box 0,95 x 0,40 x 0,20 m
Vol 0,08 m³
Gross weight 4,4 Kg Net weight 2,9 Kg

LED IP65 CE EAC

2825



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED temperature colour
/1 _ 2700 K G
CRI >90 2376 lm 198 lm/W

Control
2825 _ _ **/** _ **1**
DALI-2

2825 _ _ **/** _ **5**
Push

2825 _ _ **/** _ **Z** _ **30**
Casambi (Remote)

Materials
Body: Aluminium. Glass: Borosilicate glass.
Diffuser: Opal polycarbonate.

Light Source and electronics
1 x LED 7W 300 mA
Constant Current 300 mA
220~240V. 50/60Hz

Packaging
1 Box 0,95 x 0,30 x 0,30 m
Vol 0,09 m³
Gross weight 6,4 Kg Net weight 4,40 Kg

LED IP65 CE EAC



Dama


Design by Ludovica+Roberto Palomba

Combining technical quality and refinement with a layer of warmth and intimacy, the Dama collection connects the charm of tradition with the finesse of contemporary lighting design.

Table Floor Pendants



3225



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED temperature colour

/1 _ 2700 K E
CRI >90 1850 lm 120 lm/W

Control

3225 _ _ **/** _ **5**
Push

3225 _ _ **/** _ **Z**
Casambi

Materials

Tube: Steel. Base: Zamak.
Shade: Paper.

Light Source and electronics

1 x LED STRIP 16,2W 900 mA
Constant Voltage 24V
100~240V. 50/60Hz

Packaging

1 Box 0,75 x 0,55 x 0,55 m
Vol 0,23 m³
Gross weight 3,3 Kg Net weight 1,8 Kg

Notes

Electric cable 2,5 m


LED □ IP20 CE EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 | 10 | /1 | A | _18

Model
Finish
LED temperature colour
Control
Electrical connection
Only for pendants

3230

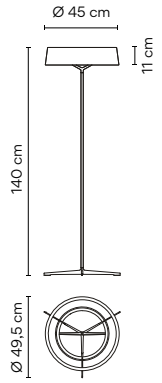

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED temperature colour
/1 _ 2700 K E
CRI >90 1850 lm 120 lm/W

Control
3230 _ _ **/** _ **5**
Push

3230 _ _ **/** _ **Z**
Casambi

Materials
Tube: Steel. Base: Zamak.
Shade: Paper.


Light Source and electronics
1 x LED STRIP 16,2W 900 mA
Constant Voltage 24V
100~240V. 50/60Hz

Packaging
1 Box 1,6 x 0,55 x 0,55 m
Vol 0,48 m³
Gross weight 5 Kg Net weight 2,55 Kg

Notes
Electric cable 2,5 m

LED IP20 EAC Bi-volt

3235



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED temperature colour
/1 _ 2700 K E
CRI >90 1850 lm 120 lm/W

Control
3235 _ _ **/** _ **1**
DALI

3235 _ _ **/** _ **B**
1-10V, Push

3235 _ _ **/** _ **Z**
Casambi

Materials
Body: Aluminium.
Shade: Paper.

Light Source and electronics
1 x LED STRIP 16,2W 900 mA
Constant Current 900 mA
110~240V. 50/60Hz

Packaging
1 Box 0,40 x 0,55 x 0,55 m
Vol 0,12 m³
Gross weight 3,2 Kg Net weight 1,6 Kg

Notes
Extra cable length.

LED IP20 EAC Bi-volt

Electrical connection
- Surface
- **_18** Free Wire
- **_23** Built-in
- **_31** Remote Micro
  for plaster ceilings
- **_32** Remote XXS
  for all types of drop ceilings





Electrical connection options for model 3235

Choose your preferred installation option accordingto your needs.
For each composition, the optimal minimum number of drivers will be delivered.

Drop ceiling

The innovative remote and built-in fittings accentuate the silkiness and lightness of compositions on suspended ceilings, its great visual grandeur taking center stage.

For Ref. 3235

Remote



Micro ø 3 cm
height 7 cm
for plaster ceilings. Black finish.





XXS ø 6 cm
height 6 cm
for all types of drop ceilings. Match with fixture finish.

Built-in



ø 8 cm
height 6 cm
match with fixture finish.







Regular ceiling

When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.

For Ref. 3235


Surface




ø 20 cm

match with fixture finish.


Free Wire




ø 20 cm



ø 22 cm





ø 36 cm



ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendants.







Palma

Design by Antoni Arola

The interior ambience takes on a life of its own with the possibility of integrating plants with the lighting compositions. Palma connects light and vegetation as in the natural landscape.

Wall



55 cm

3700




85 cm

3702



120 cm

3704

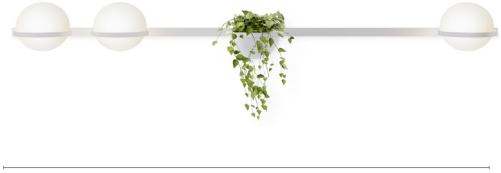

195 cm

3706



3710



3714




3716



3718

3700



Finishes

18/ _ _ Graphite
(ADAPTA RF 9913 WX)

93/ _ _ White
(RAL 9016)

LED temperature colour

/1 _ 2700 K F
CRI >90 868 lm 94 lm/W

Control

3700 _ _ **/** _ **B**
1-10V, Push

Materials

Diffuser: Blown-glass. Profile: Aluminum.

Light Source and electronics

2 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz


Packaging

1 Box 0,57 x 0,31 x 0,21 m
Vol 0,0382 m³
Gross weight 3 Kg Net weight 1,8 Kg

LED IP20 CE EAC

Product specifications subject to change without notice. Please check vibia.com for updated information.

3702



Finishes
- **18/** _ _ Graphite (ADAPTA RF 9913 WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour
/1 _ 2700 K F
CRI >90 868 lm 87 lm/W

Control
3702 _ _ **/** _ **1**
DALI

3702 _ _ **/** _ **B**
1-10V, Push


Materials
Diffuser: Blown-glass. Profile: Aluminum.
Planter: PMMA.

Light Source and electronics
2 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
1 Box 0,87 x 0,31 x 0,21 m
Vol 0,0581 m³
Gross weight 4,05 Kg Net weight 2,4 Kg

LED IP20 CE EAC

3704



Finishes
- **18/** _ _ Graphite (ADAPTA RF 9913 WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour
/1 _ 2700 K F
CRI >90 1736 lm 87 lm/W

Control
3704 _ _ **/** _ **1**
DALI

3704 _ _ **/** _ **B**
1-10V, Push


Materials
Diffuser: Blown-glass. Profile: Aluminum.
Planter: PMMA.

Light Source and electronics
4 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0081 m³
Gross weight 6,2 Kg Net weight 3,9 Kg

LED IP20 CE EAC

3706



Finishes
- **18/** _ _ Graphite (ADAPTA RF 9913 WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour
/1 _ 2700 K F
CRI >90 2604 lm 87 lm/W

Control
3706 _ _ **/** _ **1**
DALI

3706 _ _ **/** _ **B**
1-10V, Push


Materials
Diffuser: Blown-glass. Profile: Aluminum.
Planter: PMMA.

Light Source and electronics
6 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1793 m³
Gross weight 6,4 Kg Net weight 3,9 Kg

LED IP20 CE EAC

3710



Finishes
- **18/** _ _ Graphite (ADAPTA RF 9913 WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour
/1 _ 2700 K F
CRI >90 868 lm 87 lm/W

Control
3710 _ _ **/** _ **B**
1-10V, Push


Materials
Diffuser: Blown-glass. Profile: Aluminum.

Light Source and electronics
2 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
1 Box 0,57 x 0,31 x 0,21 m
Vol 0,0382 m³
Gross weight 2,6 Kg Net weight 1,8 Kg

LED IP20 CE EAC

3714



Finishes
- **18/** _ _ Graphite (ADAPTA RF 9913 WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour
/1 _ 2700 K F
CRI >90 868 lm 87 lm/W

Control
3714 _ _ **/** _ **1**
DALI

3714 _ _ **/** _ **B**
1-10V, Push


Materials
Diffuser: Blown-glass. Profile: Aluminum.
Planter: PMMA.

Light Source and electronics
2 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0081 m³
Gross weight 5,2 Kg Net weight 2,9 Kg

LED IP20 CE EAC

3716



Finishes
- **18/** _ _ Graphite (ADAPTA RF 9913 WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour
/1 _ 2700 K F
CRI >90 1736 lm 87 lm/W

Control
3716 _ _ **/** _ **1**
DALI

3716 _ _ **/** _ **B**
1-10V, Push


Materials
Diffuser: Blown-glass. Profile: Aluminum.

Light Source and electronics
4 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0081 m³
Gross weight 6,5 Kg Net weight 4,2 Kg

LED IP20 CE EAC

3718



Finishes
- **18/** _ _ Graphite (ADAPTA RF 9913 WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour
/1 _ 2700 K F
CRI >90 2604 lm 87 lm/W

Control
3718 _ _ **/** _ **1**
DALI

3718 _ _ **/** _ **B**
1-10V, Push

Materials
Diffuser: Blown-glass. Profile: Aluminum.
Planter: PMMA.

Light Source and electronics
6 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1793 m³
Gross weight 8,6 Kg Net weight 6,1 Kg

LED IP20 CE EAC

Product specifications subject to change without notice. Please check vibia.com for updated information.

Pendants

3720




3724



3726



3728



3730




3734



3736



3720



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)
93/ _ _ White
(RAL 9016)

LED temperature colour
/1 _ 2700 K F
CRI >90 868 lm 87 lm/W

Control
3720 _ _ **/** _ **1**
DALI
3720 _ _ **/** _ **B**
1-10V, Push
3720 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Blown-glass. Profile: Aluminum.


Light Source and electronics
2 x LED 4,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
1 Box 0,71 x 0,27 x 0,21 m
Vol 0,0413 m³
Gross weight 3,75 Kg Net weight 2,8 Kg

Notes
Extra cable length.

LED IP20 CE EAC Bi-volt

3724



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)
93/ _ _ White
(RAL 9016)

LED temperature colour
/1 _ 2700 K F
CRI >90 868 lm 87 lm/W

Control
3724 _ _ **/** _ **1**
DALI
3724 _ _ **/** _ **B**
1-10V, Push
3724 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Blown-glass. Profile: Aluminum.
Planter: PMMA.


Light Source and electronics
2 x LED 4,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
1 Box 1,02 x 0,27 x 0,21 m
Vol 0,0588 m³
Gross weight 4,6 Kg Net weight 3,3 Kg

Notes
Extra cable length.

LED IP20 CE EAC Bi-volt

3726



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)
93/ _ _ White
(RAL 9016)

LED temperature colour
/1 _ 2700 K F
CRI >90 1736 lm 87 lm/W

Control
3726 _ _ **/** _ **1**
DALI
3726 _ _ **/** _ **B**
1-10V, Push
3726 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Blown-glass. Profile: Aluminum.


Light Source and electronics
4 x LED 4,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
1 Box 1,02 x 0,27 x 0,21 m
Vol 0,0588 m³
Gross weight 5,4 Kg Net weight 4,1 Kg

Notes
Extra cable length.

LED IP20 CE EAC Bi-volt

3728



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)
93/ _ _ White
(RAL 9016)

LED temperature colour
/1 _ 2700 K F
CRI >90 1736 lm 87 lm/W

Control
3728 _ _ **/** _ **1**
DALI
3728 _ _ **/** _ **B**
1-10V, Push
3728 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Blown-glass. Profile: Aluminum.
Planter: PMMA.

Light Source and electronics
4 x LED 4,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz


Packaging
1 Box 0,75 x 0,53 x 0,21 m
Vol 0,0857 m³
Gross weight 8,8 Kg Net weight 4,7 Kg

Notes
Extra cable length.

LED IP20 CE EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

3730



Finishes
- **18/** _ _ Graphite (ADAPTA RF 9913 WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour
/1 _ 2700 K F
CRI >90 2604 lm 87 lm/W

Control
3730 _ _ **/** _ **A**
DALI, 1-10V, Push

3730 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Blown-glass. Profile: Aluminum.


Light Source and electronics
6 x LED 4,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
1 Box 0,75 x 0,53 x 0,21 m
Vol 0,0857 m³
Gross weight 9,5 Kg Net weight 5,4 Kg

Notes
Extra cable length.

LED IP20 CE EAC Bi-volt

3734



Finishes
- **18/** _ _ Graphite (ADAPTA RF 9913 WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour
/1 _ 2700 K F
CRI >90 2265 lm 103 lm/W

Control
3734 _ _ **/** _ **A**
DALI, 1-10V, Push

3734 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Blown-glass. Profile: Aluminum.
Planter: PMMA.


Light Source and electronics
1 x LED 2 W 500 mA
4 x LED 4,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
1 Box 1,72 x 0,33 x 0,31 m
Vol 0,1790 m³
Gross weight 9,4 Kg Net weight 5,95 Kg

Notes
Extra cable length.

LED IP20 CE EAC Bi-volt

3736



Finishes
- **18/** _ _ Graphite (ADAPTA RF 9913 WX)
- **93/** _ _ White (RAL 9016)

LED temperature colour
/1 _ 2700 K F
CRI >90 3133 lm 98 lm/W

Control
3736 _ _ **/** _ **A**
DALI, 1-10V, Push

3736 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Blown-glass. Profile: Aluminum.
Planter: PMMA.

Light Source and electronics
1 x LED 2 W 500 mA
6 x LED 4,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
2 Boxes
Vol 0,1793 m³
Gross weight 9,1 Kg Net weight 6,6 Kg

Notes
Extra cable length.

LED IP20 CE EAC
Dimmer Bi-volt

1160 | 10 | /1 | A
Model | Finish | LED temperature colour | Control


Table



ø 22 cm

3740

3740



Finishes

18/ _ _ Graphite
(ADAPTA RF 9913 WX)

93/ _ _ White
(RAL 9016)

LED temperature colour

/1 _ 2700 K F
CRI >90 868,0 lm 94 lm/W

Control

3740 _ _ **/** _ **5**
Push

Materials

Diffuser: Blown-glass. Profile: Aluminum.
Rods: Steel.

Light Source and electronics

2 x LED 4,6 W 500 mA
Constant Current 500 mA
100~240V 50/60Hz

Packaging

1 Box 0,24 x 0,24 x 0,49 m
Vol 0,0282 m^3
Gross weight 1,7 Kg Net weight 1,2 Kg

Notes

Electric cable with plug and
push-button (3m).

UNTIL STOCK RUNS OUT

LED IP20 CE EAC

Dimmer Bi-volt



 Product specifications subject to change without notice. Please check vibia.com for updated information.




Plis Outdoor

Design by Ramos & Bassols


A surprising design which brings the warm atmosphere and textures of the indoors to the garden, terrace or porch. Breaking down boundaries between inside and outside.

Outdoor

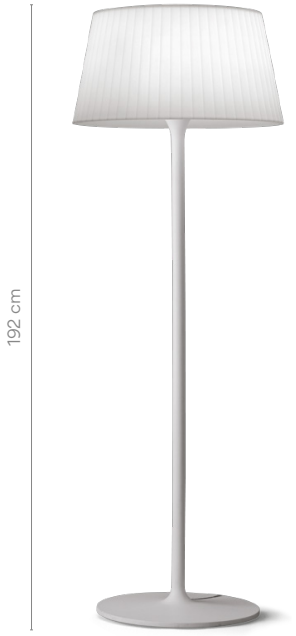

4030 4035

4030



Finishes

03 White (RAL 9016)

LED 2700 K 1520 lm Dim

4030 03

Materials

Diffuser: Polyethylene. Base: Polyurethane foam. Lid: Steel.

Light Source and electronics

2 x E27 230V 12 W

Packaging

1 Box 1,99 x 0,75 x 0,76 m
Vol 1,1430 m³
Gross weight 40,5 Kg Net weight 29,5 Kg


Notes

Portable version. Surface cable 3,5 m

UNTIL STOCK RUNS OUT

IP65 CE EAC

4035



Finishes

03 White (RAL 9016)

LED 2700 K 1520 lm Dim

4035 03

Materials

Diffuser: Polyethylene. Base: Polyurethane foam. Lid: Steel.

Light Source and electronics

2 x E27 230V 12 W

Packaging

1 Box 1,99 x 0,75 x 0,76 m
Vol 1,1430 m³
Gross weight 40,5 Kg Net weight 29,5 Kg

Notes

Built-in cable.

UNTIL STOCK RUNS OUT

IP65 CE EAC

Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 | 10 | /1 | A

Model
Finish
LED temperature colour
Control




Wind

Design by Jordi Vilardell

A perfect marriage of technology and tradition.
Wind's drum shade is made of fibreglass, an innovative webbed texture and pattern that elevates the visual contribution of this timeless silhouette.

Outdoor



ø 60 cm

4072



ø 60 cm

4077



ø 120 cm


4078



4057




4062

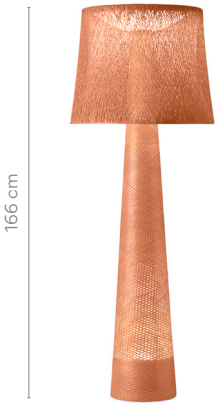

4067

4057



Finishes

- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)
- **61/** _ _ Ocre red (NCS S 3050-Y60R)

LED temperature colour

/1 _ 2700 K D
CRI >90 3299,09 lm 132 lm/W

Control

4057 _ _ **/** _ **0**
On/ Off

Materials

Shade: Filament winding. Weight: Concrete.
Lid: Steel. Diffuser: Methacrylate.

Light Source and electronics

1 x LED PLATE 25 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging


2 Boxes
Total Vol 1,0300 m^3
Gross weight 45,1 Kg Net weight 27,8 Kg

Notes


Portable version. Electric cable 1,5 m

LED IP64 EAC

Product specifications subject to change without notice. Please check vibia.com for updated information.

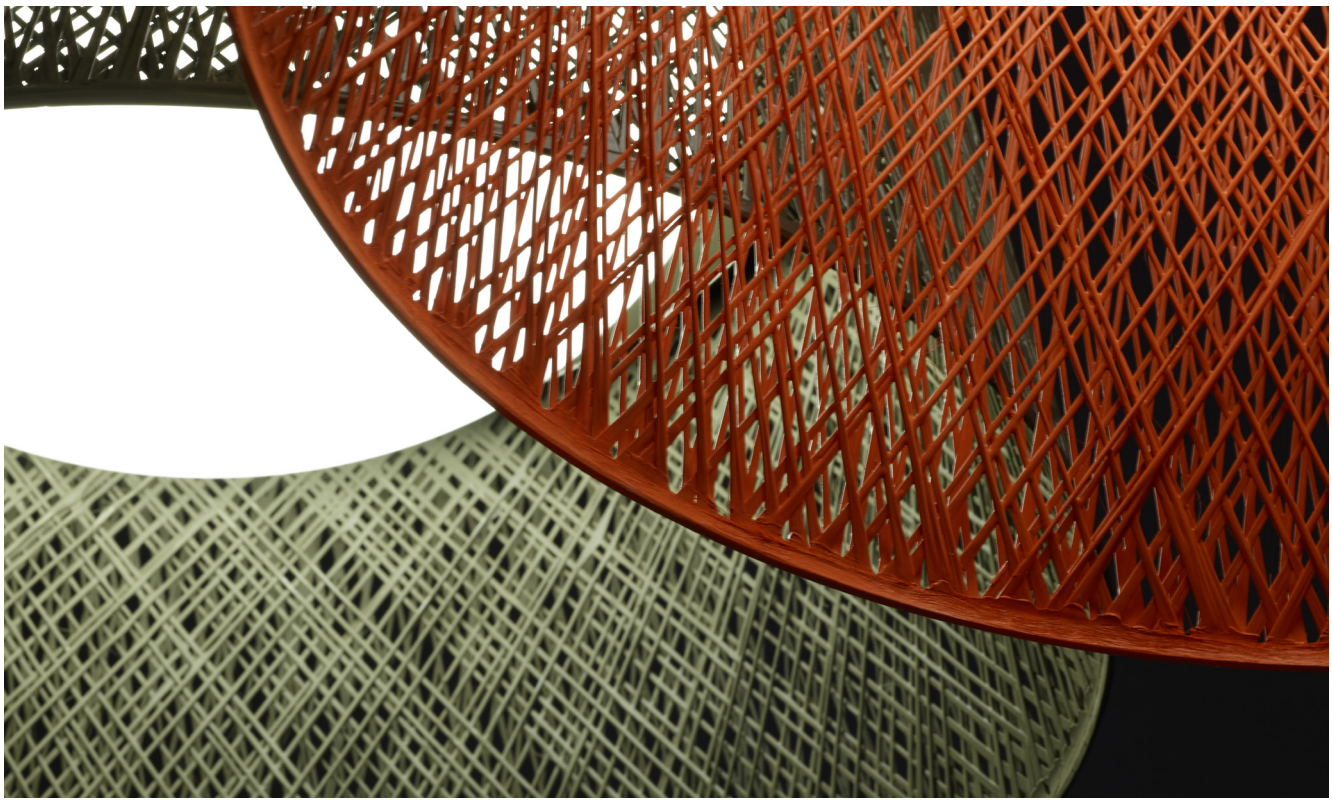

4062

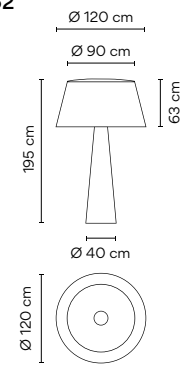

Finishes
- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)
- **61/** _ _ Ocre red (NCS S 3050-Y60R)

LED temperature colour
/1 _ 2700 K D
CRI >90 3481,09 lm 129 lm/W

Control
4062 _ _ **/** _ **0**
On/ Off

Materials
Base: Filament winding. Shade: Filament winding.
Diffuser: Methacrylate.


Light Source and electronics
4 x LED 14 W 500 mA
1 x LED 2,4 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging
4 Boxes
Total Vol 2,3500 m³
Gross weight 125,2 Kg Net weight 113,23 Kg

Notes
Portable version. Electric cable 2 m

LED IP64 CE EAC

4067



Finishes
- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)
- **61/** _ _ Ocre red (NCS S 3050-Y60R)

LED temperature colour
/1 _ 2700 K D
CRI >90 3481,09 lm 129 lm/W

Control
4067 _ _ **/** _ **0**
On/ Off

Materials
Shade: Filament Winding. Base: Filament Winding.
Diffuser: Methacrylate.


Light Source and electronics
1 x LED PLATE 25 W 700 mA
1 x LED 2,4 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging
3 Boxes
Total Vol 1,5000 m³
Gross weight 50 Kg Net weight 30,5 Kg

Notes
Portable version. Electric cable 1,5 m

LED IP64 CE EAC

4072



Finishes

- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)
- **61/** _ _ Ocre red (NCS S 3050-Y60R)

LED temperature colour

/1 _ 2700 K D
CRI >90 3299,09 lm 132 lm/W

Control

4072 _ _ **/** _ **0**
On/ Off

Materials

Shade: Filament winding. Canopy Plate: Steel.
Lid: Steel. Diffuser: Methacrylate.

Light Source and electronics

1 x LED PLATE 25 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging


1 Box 0,50 x 0,77 x 0,77 m
Vol 0,2970 m³
Gross weight 11,1 Kg Net weight 9,9 Kg

Notes

Surface mounted
Extra cable length.

LED IP65 CE EAC

4077



Finishes

- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)
- **61/** _ _ Ocre red (NCS S 3050-Y60R)

LED temperature colour

/1 _ 2700 K D
CRI >90 3299,09 lm 132 lm/W

Control

4077 _ _ **/** _ **0**
On/ Off

Materials

Shade: Filament winding. Canopy Plate: Steel.
Lid: Steel. Diffuser: Methacrylate.

Light Source and electronics

1 x LED PLATE 25 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging


1 Box 0,67 x 0,67 x 0,62 m
Vol 0,2970 m³
Gross weight 11 Kg Net weight 9,9 Kg

Notes

Surface mounted
Extra cable length.

LED IP65 CE EAC
Dimmer Bi-volt

4078



Finishes

- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)
- **61/** _ _ Ocre red (NCS S 3050-Y60R)

LED temperature colour

/1 _ 2700 K D
CRI >90 3299,09 lm 132 lm/W

Control

4078 _ _ **/** _ **0**
On/ Off

Materials

Shade: Filament winding. Canopy Plate: Steel.
Lid: Steel. Diffuser: Methacrylate.

Light Source and electronics

3 x LED PLATE 25 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,74 x 1,24 x 1,27 m
Vol 1,1300 m³
Gross weight 38 Kg Net weight 30 Kg

Notes

Indoor only
Extra cable length.

LED IP20 CE EAC
Dimmer Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 | 10 | /1 | A

Model
Finish
LED temperature colour
Control



Break

Design by Xuclà & Alemany

Resembling an avant-garde sculpture, Break
is distinguished by its architectural attitude.
The cubic volumes angle provides down light,
while doubling as sculptural outdoor presence.

Outdoor




4101



4106




4110

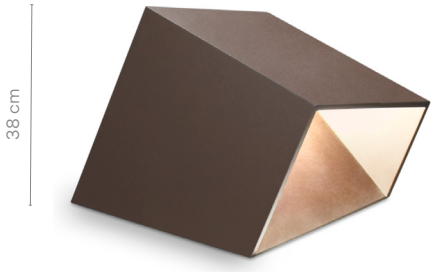

4108

4101



Finishes
80/ _ _ Concrete
(Natural finish)

LED temperature colour
/1 _ 2700 K E
CRI >80 710 lm 115 lm/W

Control
4101 _ _ **/** _ **0**
On/ Off


Materials
Head: Concrete.
Base: Concrete. Diffuser: Methacrylate.

Light Source and electronics
1 x LED 6,2 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,88 x 0,35 x 0,34 m
Vol 0,1032 m³
Gross weight 38,9 Kg Net weight 35,01 Kg

LED IP66 EAC Bi-volt

4106



Finishes
80/ _ _ Concrete
(Natural finish)

LED temperature colour
/1 _ 2700 K E
CRI >80 710 lm 118 lm/W

Control
4106 _ _ **/** _ **0**
On/ Off


Materials
Head: Concrete.
Base: Concrete. Diffuser: Methacrylate.

Light Source and electronics
1 x LED 6,2 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz


Packaging
1 Box 0,88 x 0,35 x 0,34 m
Vol 0,0598 m³
Gross weight 21,5 Kg Net weight 19,35 Kg

LED IP66 EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

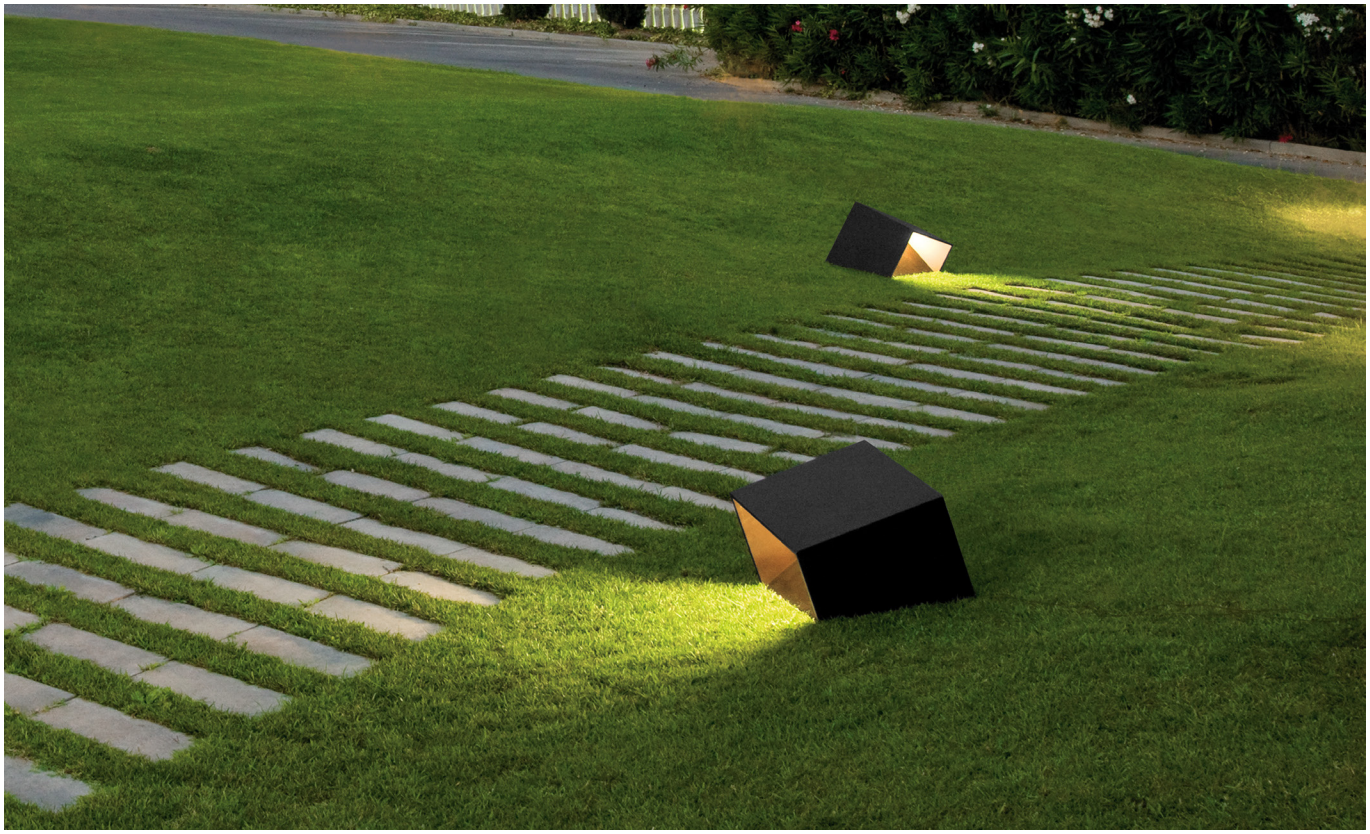

4108



Finishes

07/ _ _ Khaki
(RAL 7006)
54/ _ _ Oxide
(RAL 8014)

LED colour temperature

/1 _ 2700 K D
CRI >80 2500 lm 118 lm/W

Control

4108 _ _ **/** _ **0**
On/ Off

Materials

Body: Steel.
Diffuser: Methacrylate.

Light Source and electronics


2 x LED Strip 9,2 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Packaging

1 Box 0,49 x 0,51 x 0,52 m
Vol 0,1312 m³
Gross weight 6,6 Kg Net weight 16 Kg

LED IP66 CE EAC

4110



Finishes

80/ _ _ Concrete
(Natural finish)

LED temperature colour

/1 _ 2700 K F
CRI >80 199 lm 95 lm/W

Control

4110 _ _ **/** _ **0**
On/ Off

Materials

Body: Aluminum / Concrete.
Diffuser: Methacrylate.

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

1 Box 0,260 x 0,260 x 0,260 m
Vol 1,0000 m³
Gross weight 2,30 Kg Net weight 2,07 Kg

Notes

UNTIL STOCK RUNS OUT


LED IP66 CE EAC Bi-volt

Break Plus

Design by Xuclà


An extension of the existing Break collection, defined by an instinctual connection to the landscape and surrounding architecture, Break Plus converts any wall into a three dimensional mural, casting diffuse, indirect light upwards, downwards or in both directions.

Outdoor

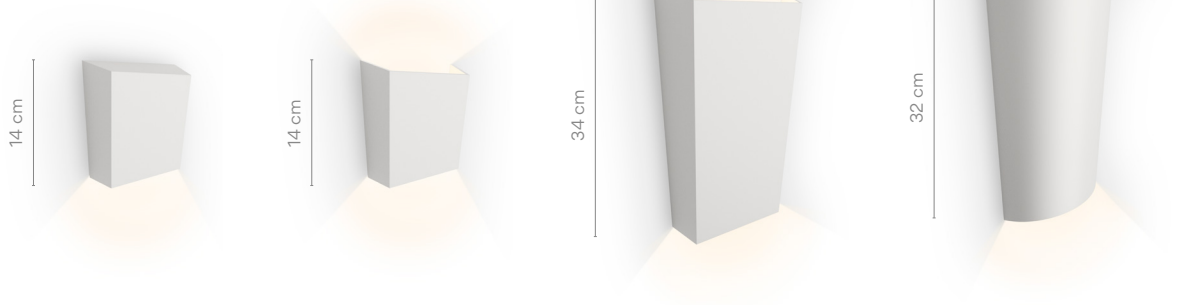

4112 **4114** **4116** **4118**

4112



Finishes

- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **95/** _ _ Primer (RAL 9016)

LED temperature colour

/1 _ 2700 K F
CRI >90 113,73 lm 113,73 lm/W

/3 _ 3500 K D
CRI >90 146,22 lm 146,22 lm/W

Control

4112 _ _ **/** _ **0**
On/ Off

4112 _ _ **/** _ **1** _ **30**
DALI (Remote)

4112 _ _ **/** _ **Z** _ **30**
Casambi (Remote)

Materials

Body: Aluminium.
Diffuser: Policarbonate.

Light Source and electronics


1 x LED 1W 350 mA
Constant Current 350 mA
100~240Vac. 50/60Hz

Packaging

1 Box 0,07 x 0,19 x 0,23 m
Vol 0,0030 m³
Gross weight 1 Kg Net weight 0,610 Kg

LED IP65 CE EAC Bi-volt

4114



Finishes

- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **95/** _ _ Primer (RAL 9016)

LED temperature colour

/1 _ 2700 K F
CRI >90 227,46 lm 113,73 lm/W

/3 _ 3500 K D
CRI >90 292,44 lm 146,22 lm/W

Control

4114 _ _ **/** _ **0**
On/ Off

4114 _ _ **/** _ **1** _ **30**
DALI (Remote)

4114 _ _ **/** _ **Z** _ **30**
Casambi (Remote)

Materials

Body: Aluminium.
Diffuser: Policarbonate.

Light Source and electronics

2 x LED 1W 350 mA
Constant Current 350 mA
100~240Vac. 50/60Hz

Packaging


1 Box 0,07 x 0,19 x 0,23 m
Vol 0,0030 m³
Gross weight 1 Kg Net weight 0,590 Kg

LED IP65 CE EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.



4116



Finishes

- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **95/** _ _ Primer (RAL 9016)

LED temperature colour

/1 _ 2700 K G
CRI >90 707,52 lm 90,7 lm/W

/3 _ 3500 K F
CRI >90 925,22 lm 118,61 lm/W

Control

4116 _ _ **/** _ **0**
On/ Off

4116 _ _ **/** _ **1** _ **30**
DALI (Remote)

4116 _ _ **/** _ **Z** _ **30**
Casambi (Remote)

Materials

Body: Aluminium.
Diffuser: Policarbonate.

Light Source and electronics


2 x LED 4W 350 mA
Constant Current 350 mA
100~240Vac. 50/60Hz

Packaging

1 Box 0,11 x 0,27 x 0,42 m
Vol 0,0120 m^3
Gross weight 3,2 Kg Net weight 2,2 Kg

LED IP65 CE EAC Bi-volt

4118



Finishes

- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **95/** _ _ Primer (RAL 9016)

LED temperature colour

/1 _ 2700 K G
CRI >90 707,52 lm 90,7 lm/W

/3 _ 3500 K F
CRI >90 925,22 lm 118,61 lm/W

Control

4118 _ _ **/** _ **0**
On/ Off

4118 _ _ **/** _ **1** _ **30**
DALI (Remote)

4118 _ _ **/** _ **Z** _ **30**
Casambi (Remote)

Materials

Body: Aluminium.
Diffuser: Policarbonate.

Light Source and electronics

2 x LED 4W 350 mA
Constant Current 350 mA
100~240Vac. 50/60Hz

Packaging

1 Box 0,11 x 0,27 x 0,42 m
Vol 0,0120 m^3
Gross weight 3,2 Kg Net weight 1,71 Kg

LED IP65 CE EAC Bi-volt

Empty

Design by Xuclà


A sculpture by day and lighting by night, this outdoor fixture embodies multifunctional design. Its crisp angles create a cantilevered perch that serves as a side table or stool.

Outdoor



4125 **4130** **4135** **4136**

4125



Finishes

18/ _ _ Polymer Concrete Grey (NCS S 2002-B50G)

LED temperature colour

/1 _ 2700 K G
CRI >80 664 lm 39 lm/W

/3 _ 3500 K G
CRI >90 1247 lm 72,5 lm/W

Control

4125 _ _ **/** _ **0**
On/ Off

Materials

Body: Polymer concrete.
Diffuser: Methacrylate.

Light Source and electronics

2 x LED STRIP 24V 8,6 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging


1 Box 0,56 x 0,50 x 0,50 m
Vol 0,176 m^3
Gross weight 40 Kg Net weight 36 Kg

Notes

Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

LED IP66 CE EAC Bi-volt

4130



Finishes

18/ _ _ Polymer Concrete Grey (NCS S 2002-B50G)

LED temperature colour

/1 _ 2700 K G
CRI >80 664 lm 39 lm/W

/3 _ 3500 K G
CRI >90 1247 lm 72,5 lm/W

Control

4130 _ _ **/** _ **0**
On/ Off

Materials

Body: Polymer concrete.
Diffuser: Methacrylate.

Light Source and electronics

2 x LED STRIP 24V 8,6 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging

1 Box 0,56 x 0,56 x 0,81 m
Vol 0,254 m^3
Gross weight 54,7 Kg Net weight 49,7 Kg

Notes


Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

LED IP66 CE EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.



4135



Finishes
18/ _ _ Polymer
Concrete Grey
(NCS S 2002-B50G)

LED temperature colour
/1 _ 2700 K G
CRI >80 304 lm 35 lm/W
/3 _ 3500 K G
CRI >90 1247 lm 145 lm/W

Control
4135 _ _ **/** _ **0**
On/ Off

Materials
Body: Polymer concrete.
Diffuser: Methacrylate.


Light Source and electronics
2 x LED STRIP 24V 4,3 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging
1 Box 0,36 x 0,36 x 0,36 m
Vol 0,04 m³
Gross weight 12,2 Kg Net weight 10,4 Kg

Notes
Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

LED IP66 EAC Bi-volt

4136



Finishes
18/ _ _ Polymer
Concrete Grey
(NCS S 2002-B50G)

LED temperature colour
/1 _ 2700 K G
CRI >80 304 lm 35 lm/W
/3 _ 3500 K G
CRI >90 1247 lm 145 lm/W

Control
4136 _ _ **/** _ **0**
On/ Off

Materials
Body: Polymer concrete.
Diffuser: Methacrylate.

Light Source and electronics
2 x LED STRIP 24V 4,3 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging
1 Box 0,36 x 0,36 x 0,65 m
Vol 0,084 m³
Gross weight 22 Kg Net weight 19 Kg

Notes
Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

LED IP66 Dimmer Bi-volt

Fold Surface

Design by Arik Levy


Fold features a geometric design that creates
a striking three-dimensional illumination effect.
Light and shadow are projected from its cubic shapes,
washing the wall with glowing chevron patterns.

Wall




22 cm

4200




33 cm

4201



44 cm


4202



55 cm

4204

4200



Finishes

- **07/** _ _ Green (PANTONE 385)
- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-white (RAL D2 1109005)

LED temperature colour

/1 _ 2700 K G
CRI >90 362,4 lm 86 lm/W

Control

4200 _ _ / _ **0**
On/ Off

Materials

Shade: Aluminum. Body: Aluminum.
Diffuser: Polycarbonate.

Light Source and electronics

2 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging


1 Box 0,26 x 0,26 x 0,16 m
Vol 0,0116 m^3
Gross weight 1,3 Kg Net weight 0,8 Kg

Notes

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

4201



Finishes

- **07/** _ _ Green (PANTONE 385)
- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-white (RAL D2 1109005)

LED temperature colour

/1 _ 2700 K G
CRI >90 724,9 lm 86 lm/W

Control

4201 _ _ / _ **0**
On/ Off

Materials

Shade: Aluminum. Body: Aluminum.
Diffuser: Polycarbonate.

Light Source and electronics

4 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

1 Box 0,41 x 0,41 x 0,21 m
Vol 0,0353 m^3
Gross weight 2,8 Kg Net weight 1,6 Kg

Notes


UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.



4202



Finishes
- **07/** _ _ Green (PANTONE 385)
- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-white (RAL D2 1109005)

LED temperature colour
/1 _ 2700 K G
CRI >90 1087,3 lm 86 lm/W

Control
4202 _ _ **/** _ **0**
On/ Off

Materials
Shade: Aluminum. Body: Aluminum.
Diffuser: Polycarbonate.


Light Source and electronics
6 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
1 Box 0,17 x 0,51 x 0,51 m
Vol 0,0429 m^3
Gross weight 4,2 Kg Net weight 2,4 Kg

Notes
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

4204



Finishes
- **07/** _ _ Green (PANTONE 385)
- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-white (RAL D2 1109005)

LED temperature colour
/1 _ 2700 K G
CRI >90 1449,8 lm 86 lm/W

Control
4204 _ _ **/** _ **0**
On/ Off

Materials
Shade: Aluminum. Body: Aluminum.
Diffuser: Polycarbonate.

Light Source and electronics
8 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m^3
Gross weight 5,7 Kg Net weight 3,2 Kg

Notes
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

Out

Design by Víctor Carrasco

A romantic response to the global transition to life outside,
Out brings the intimacy of indoor lighting outdoors. Suitable for
illuminating a table or meeting point, this luminaire emanates with
a soft, diffuse downlight, its source obscured by a translucent screen.

Floor




4270



4275

4270



Finishes

- **22/** _ _ Graphite Black (NCS S 8000N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **36/** _ _ Soft Pink (NCS S 1010-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED temperature colour

/1 _ 2700 K F
CRI >90 1300 lm 104,83 lm/W

Control

4270 _ _ / _ 5
Push

4270 _ _ / _ Z
Casambi

Materials

Tube: Stainless Steel. Shades: Aluminium.
Diffuser: Poliethylene.

Light Source and electronics

1 x LED 12,4W 700 mA
Constant Voltage 24V 1.0A
220~240V. 50/60Hz

Packaging

5 Boxes
Box 1: 0,17 x 0,39 x 0,51 m
Box 2: 0,17 x 0,39 x 0,51 m
Box 3: 0,60 x 0,60 x 0,27 m
Box 4: 0,72 x 0,72 x 0,32 m
Box 5: 2,40 x 2,10 x 0,1 m
Total Vol 0,835 m^3
Gross weight 59 Kg Net weight 48 Kg

Notes


Surface cable 4 m

LED IP65 EAC

Product specifications subject to change without notice. Please check vibia.com for updated information.



4275



Finishes

- **22/** _ _ Graphite Black (NCS S 8000N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **36/** _ _ Soft Pink (NCS S 1010-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED temperature colour

/1 _ 2700 K F
CRI >90 1300 lm 104,83 lm/W

Control

4275 _ _ **/** _ **1**
DALI

4275 _ _ **/** _ **Z**
Casambi (Remote)

Materials

Tube: Stainless Steel. Shades: Aluminium.
Diffuser: Poliethylene.

Light Source and electronics

1 x LED 12,4W 700 mA
Constant Current 700 mA
220~240V. 50/60Hz

Packaging

5 Boxes
Box 1: 0,17 x 0,39 x 0,51 m
Box 2: 0,17 x 0,39 x 0,51 m
Box 3: 0,60 x 0,60 x 0,27 m
Box 4: 0,72 x 0,72 x 0,32 m
Box 5: 2,40 x 2,10 x 0,1 m
Total Vol 0,835 m^3
Gross weight 59 Kg Net weight 48 Kg

Notes

Bolt-down “hard wired”

LED IP65 EAC

Up

Design by Ramos & Bassols

Inspired by the look of neoclassical cornices, Up blends seamlessly into the ceiling. With its flat LED diffusion system and refined rim, it gives the appearance of uniform light passing from an opening in the ceiling through a sleek frame.

Ceiling

4440

ø 50 cm



4442

ø 77 cm



4460

106 cm



4452

73 x 121 cm




4454

64 x 64 cm



4440



Finishes

18/ _ _ Graphite (RAL 7016)

93/ _ _ White (RAL 9016)

Finish customization (Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K F
CRI >90 2207 lm 98 lm/W

/4 _ 4000 K E
CRI >90 2982 lm 132,5 lm/W

Control

4440 _ _ **/** _ **A**
DALI-2, 1-10V, Push

4440 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Body: Aluminum.
Ceiling support: Steel.

Light Source and electronics


1 x LED PLATE 26,5 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,17 x 0,55 x 0,55 m
Vol 0,0514 m^3
Gross weight 11 Kg Net weight 7,5 Kg

LED IP20 EAC Bi-volt

4442



Finishes

18/ _ _ Graphite (RAL 7016)

93/ _ _ White (RAL 9016)

Finish customization (Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K F
CRI >90 3959 lm 100 lm/W

/4 _ 4000 K D
CRI >90 6159 lm 155,8 lm/W

Control

4442 _ _ **/** _ **A**
DALI-2, 1-10V, Push

4442 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Body: Aluminum.
Ceiling support: Steel.

Light Source and electronics

1 x LED PLATE 55,3 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging


1 Box 0,17 x 0,90 x 0,90 m
Vol 0,1377 m^3
Gross weight 13 Kg Net weight 15 Kg

LED IP20 EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 | 10 | /1 | A
Model
Finish
LED temperature colour
Control

4452



Finishes
- **18/** _ _ Graphite (RAL 7016)
- **93/** _ _ White (RAL 9016)

Finish customization (Available options: Vibia colour palette)

LED temperature colour
- **/1** _ 2700 K F — CRI >90 3957 lm 79 lm/W
- **/4** _ 4000 K F — CRI >90 4754 lm 95,1 lm/W

Control
- **4452** _ _ **/** _ **A** — DALI-2, 1-10V, Push
- **4452** _ _ **/** _ **Z** — Casambi


Materials
Diffuser: Polycarbonate. Body: Aluminum.
Ceiling support: Steel.

Light Source and electronics
1 x LED PLATE 50 W 900 mA
Constant Current 900 mA
110~240V 50/60Hz

Packaging
1 Box 0,17 x 0,42 x 1,31 m
Vol 0,0924 m³
Gross weight 14 Kg Net weight 12 Kg

LED IP20 CE EAC Bi-volt

4454



Finishes
- **18/** _ _ Graphite (RAL 7016)
- **93/** _ _ White (RAL 9016)

Finish customization (Available options: Vibia colour palette)

LED temperature colour
- **/1** _ 2700 K F — CRI >90 3957 lm 79 lm/W
- **/4** _ 4000 K F — CRI >90 4754 lm 95,1 lm/W

Control
- **4454** _ _ **/** _ **A** — DALI-2, 1-10V, Push
- **4454** _ _ **/** _ **Z** — Casambi


Materials
Diffuser: Polycarbonate. Body: Aluminum.
Ceiling support: Steel.

Light Source and electronics
1 x LED PLATE 50 W 900 mA
Constant Current 900 mA
110~240V 50/60Hz

Packaging
1 Box 0,17 x 0,73 x 0,73 m
Vol 0,0905 m³
Gross weight 14 Kg Net weight 13 Kg

LED IP20 CE EAC Bi-volt

4460



Finishes
- **18/** _ _ Graphite (RAL 7016)
- **93/** _ _ White (RAL 9016)

Finish customization (Available options: Vibia colour palette)

LED temperature colour
- **/1** _ 2700 K G — CRI >90 4140,22 lm 66 lm/W
- **/4** _ 4000 K E — CRI >90 9141 lm 145,1 lm/W

Control
- **4460** _ _ **/** _ **A** — DALI-2, 1-10V, Push
- **4460** _ _ **/** _ **Z** — Casambi

Materials
Diffuser: Polycarbonate. Body: Aluminum.
Ceiling support: Steel.

Light Source and electronics
1 x LED PLATE 26,5 W 700 mA
1 x LED PLATE 55,3W 750 mA
Constant Current 700 / 750 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1891 m³
Gross weight 24 Kg Net weight 23 Kg

Notes
Only one electric connection point

LED IP20 CE EAC

Origami

Design by Ramón Esteve

Recalling the folded paper of the Japanese art form for which it's named, Origami generates a stunning play of light and shadows. Composed of two architectural modules that be arranged in countless personalized designs, it creates the effect of climbing ivy along a blank expanse of wall.

Wall Outdoor

4500

30 cm




4501

30 cm




4504

53 cm



4506

73 cm

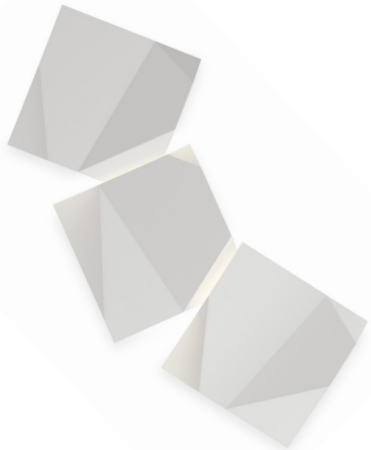


4508


94 cm




Each project is unique. Visit vibia.com and chose among multiple compositions designed and adapted to your project needs.

Personalise your own Origami composition quick and easy at vibia.com

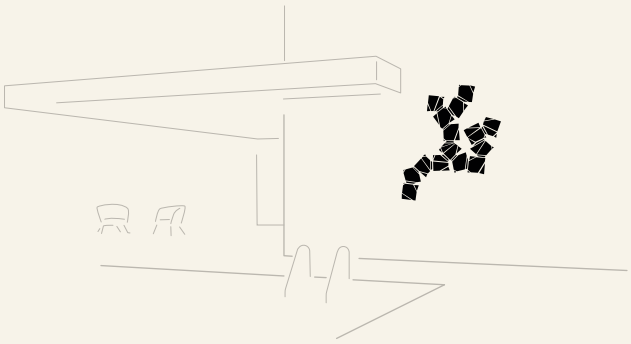

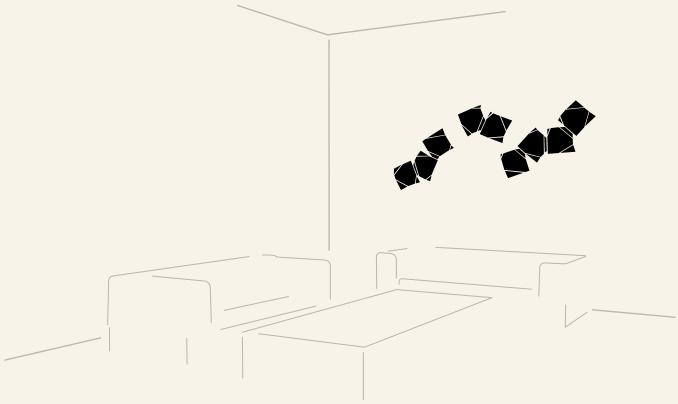

4500



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour

/1 _ 2700 K D
CRI >90 756,42 lm 120 lm/W

/3 _ 3500 K E
CRI >90 799,1 lm 126,8 lm/W

Control

4500 _ _ **/** _ **4**
TRIAC

Materials

Shade: ABS. Diffuser: Polycarbonate.
Lid: Polycarbonate. Arm: Polycarbonate.

Light Source and electronics

1 x LED STRIP 6,3 W 350 mA
Constant Current 350 mA
110~277V 50/60Hz

Packaging


1 Box 0,35 x 0,35 x 0,12 m
Vol 0,0150 m^3
Gross weight 1,5 Kg Net weight 1 Kg

Notes

A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP65 CE EAC

4501



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour

/1 _ 2700 K D
CRI >90 756,42 lm 120 lm/W

/3 _ 3500 K E
CRI >90 799,1 lm 126,8 lm/W

Control

4501 _ _ **/** _ **4**
TRIAC

Materials

Shade: ABS. Diffuser: Polycarbonate.
Lid: Polycarbonate. Arm: Polycarbonate.

Light Source and electronics

1 x LED STRIP 6,3 W 350 mA
Constant Current 350 mA
110~277V 50/60Hz

Packaging


1 Box 0,35 x 0,35 x 0,12 m
Vol 0,0150 m³
Gross weight 1,5 Kg Net weight 1 Kg

Notes

A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP65 CE EAC

4504



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour

/1 _ 2700 K D
CRI >90 1512,84 lm 120 lm/W

/3 _ 3500 K E
CRI >90 1598,2 lm 126,8 lm/W

Control

4504 _ _ **/** _ **4**
TRIAC

Materials

Shade: ABS. Diffuser: Polycarbonate.
Lid: Polycarbonate. Arm: Polycarbonate.

Light Source and electronics

2 x LED STRIP 6,3 W 350 mA
Constant Current 350 mA
110~277V 50/60Hz

Packaging


1 Box 0,64 x 0,40 x 0,22 m
Vol 0,0563 m³
Gross weight 4,05 Kg Net weight 2,15 Kg

Notes

A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP65 CE EAC

4506



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour

/1 _ 2700 K D
CRI >90 2269,26 lm 120 lm/W

/3 _ 3500 K E
CRI >90 2397,2 lm 126,8 lm/W

Control

4506 _ _ **/** _ **4**
TRIAC

Materials

Shade: ABS. Diffuser: Polycarbonate.
Lid: Polycarbonate. Arm: Polycarbonate.

Light Source and electronics

3 x LED STRIP 6,3 W 350 mA
Constant Current 350 mA
110~277V 50/60Hz

Packaging


1 Box 0,95 x 0,40 x 0,22 m
Vol 0,0836 m³
Gross weight 5,33 Kg Net weight 3,23 Kg

Notes

A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP65 CE EAC

4508



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour

/1 _ 2700 K D
CRI >90 3025,68 lm 120 lm/W

/3 _ 3500 K E
CRI >90 3196,3 lm 126,8 lm/W

Control

4508 _ _ **/** _ **4**
TRIAC

Materials

Shade: ABS. Diffuser: Polycarbonate.
Lid: Polycarbonate. Arm: Polycarbonate.

Light Source and electronics

4 x LED STRIP 6,3 W 350 mA
Constant Current 350 mA
110~277V 50/60Hz

Packaging

1 Box 1,25 x 0,40 x 0,22 m
Vol 0,1100 m^3
Gross weight 7,2 Kg Net weight 6,48 Kg

Notes

A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP65 CE EAC




Palo Alto

Design by Xuclà

At once natural and architectural, Palo Alto creates the effect of illuminated landscaping. Its angular, tree-shaped silhouette integrates seamlessly with the outdoors whether displayed individually or in a group.

Outdoor

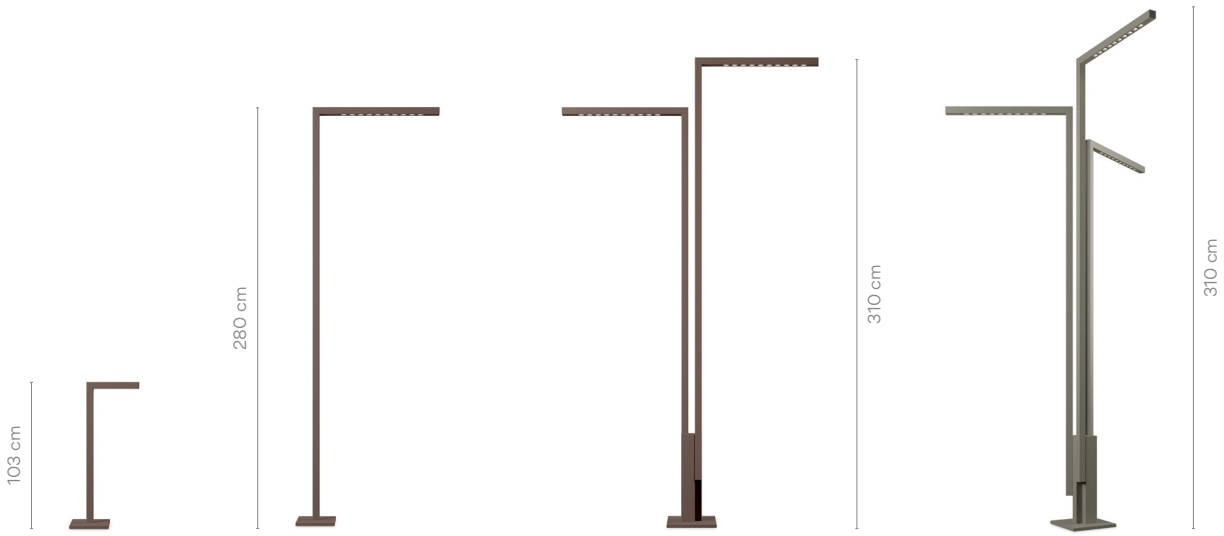

4510 4516 4539 4540

4510



Finishes

- **29/** _ _ Brown D1 (S 8005-Y50R)
- **53/** _ _ Green M1 (S 6005-G80Y)

LED temperature colour

/1 _ 2700 K G
CRI >90 179,64 lm 41 lm/W

/3 _ 3500 K G
CRI >90 179,6 lm 40,8 lm/W

Control

4510 _ _ / _ **0**
On/ Off

Materials

Body: Steel.
Cover: Steel.

Light Source and electronics


2 x LED 2,2 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Packaging

1 Box 0,44 x 0,40 x 1,10 m
Vol 0,2080 m³
Gross weight 11,1 Kg Net weight 10 Kg

LED IP65 CE EAC Bi-volt

4516



Finishes

- **29/** _ _ Brown D1 (S 8005-Y50R)
- **53/** _ _ Green M1 (S 6005-G80Y)

LED temperature colour

/1 _ 2700 K G
CRI >90 1044,95 lm 70 lm/W

/3 _ 3500 K G
CRI >90 1045,0 lm 69,7 lm/W

Control

4516 _ _ / _ **0**
On/ Off

Materials

Body: Steel.
Cover: Steel.

Light Source and electronics

1 x LED MODULE 24V 15 W
Constant Voltage 24V
100~240V 50/60Hz


Packaging

1 Box 0,32 x 0,32 x 2,64 m
Vol 0,2703 m³
Gross weight 18,4 Kg Net weight 16,5 Kg

LED IP65 CE EAC Multi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

4539



Finishes

- **29/** _ _ Brown D1 (S 8005-Y50R)
- **53/** _ _ Green M1 (S 6005-G80Y)

LED temperature colour

/1 _ 2700 K G
CRI >90 2089,9 lm 70 lm/W

/3 _ 3500 K G
CRI >90 2089,9 lm 69,7 lm/W

Control

4539 _ _ **/** _ **0**
On/ Off

Materials

Body: Steel.
Cover: Steel.

Light Source and electronics


2 x LED MODULE 24V 15 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,37 x 0,37 x 2,61 m
Vol 0,3570 m³
Gross weight 46,4 Kg Net weight 41,76 Kg

LED IP65 CE EAC Multi-volt

4540

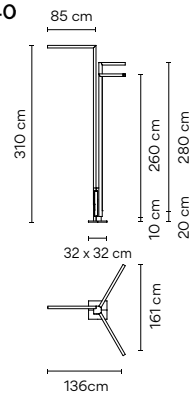

Finishes

- **29/** _ _ Brown D1 (S 8005-Y50R)
- **53/** _ _ Green M1 (S 6005-G80Y)

LED temperature colour

/1 _ 2700 K G
CRI >90 3134,85 lm 70 lm/W

/3 _ 3500 K G
CRI >90 3134,9 lm 69,7 lm/W

Control

4540 _ _ **/** _ **0**
On/ Off

Materials

Body: Steel.
Cover: Steel.

Light Source and electronics

3 x LED MODULE 24V 15 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,40 x 0,44 x 2,64 m
Vol 0,4646 m³
Gross weight 55,4 Kg Net weight 49,86 Kg

LED IP65 CE EAC Multi-volt




Brisa

Design by Lievore, Altherr, Molina

Inspired by the forest blue bell flower, Brisa adds a nature-inspired accent toany outdoor space. Its long, slender stem is topped with a pendant, conical shade and features adjustable, revolving arms.

Outdoor

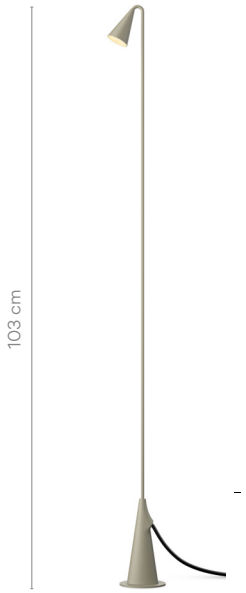

4625



4630




4635



4640

4625



Finishes

- **07/** _ _ Khaki (RAL 7039)
- **54/** _ _ Oxide (RAL 8014)

LED temperature colour

/1 _ 2700 K G
CRI >90 181,22 lm 86 lm/W

/3 _ 3500 K F
CRI >90 193,9 lm 92,3 lm/W

Control

4625 _ _ / _ **0**
On/ Off

Materials

Shade and Base: Aluminum. Disc: Stainless steel.
Vertical tube: Steel.

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

1 Box 0,16 x 0,16 x 1,6 m
Vol 0,0409 m^3
Gross weight 1,8 Kg Net weight 1,3 Kg


Notes

Spike. Surface

LED IP64 CE EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

4630



Finishes
- **07/** _ _ Khaki (RAL 7039)
- **54/** _ _ Oxide (RAL 8014)

LED temperature colour
- **/1** _ 2700 K G
  CRI >90 543,66 lm 86 lm/W
- **/3** _ 3500 K F
  CRI >90 581,7 lm 92,3 lm/W

Control
4630 _ _ **/** _ **0**
On/ Off

Materials
Shade and Base: Aluminum. Disc: Stainless steel.
Vertical tube: Steel.


Light Source and electronics
1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
1 Box 0,16 x 0,16 x 1,6 m
Vol 0,0409 m³
Gross weight 2,6 Kg Net weight 2 Kg

Notes
Built-in

LED IP65 CE EAC
Bi-volt ø 13 cm

4635



Finishes
- **07/** _ _ Khaki (RAL 7039)
- **54/** _ _ Oxide (RAL 8014)

LED temperature colour
- **/1** _ 2700 K G
  CRI >90 906,1 lm 86 lm/W
- **/3** _ 3500 K F
  CRI >90 969,5 lm 92,3 lm/W

Control
4635 _ _ **/** _ **0**
On/ Off

Materials
Shade and Base: Aluminum. Disc: Stainless steel.
Vertical tube: Steel.


Light Source and electronics
3 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
1 Box 0,32 x 0,36 x 1,16 m
Vol 0,1336 m³
Gross weight 6,5 Kg Net weight 5,85 Kg

Notes
Built-in

LED IP65 CE EAC
Bi-volt ø 17 cm

4640



Finishes
- **07/** _ _ Khaki (RAL 7039)
- **54/** _ _ Oxide (RAL 8014)

LED temperature colour
- **/1** _ 2700 K G
  CRI >90 1268,54 lm 86 lm/W
- **/3** _ 3500 K F
  CRI >90 1357,3 lm 92,3 lm/W

Control
4640 _ _ **/** _ **0**
On/ Off

Materials
Shade and Base: Aluminum. Disc: Stainless steel.
Vertical tube: Steel.

Light Source and electronics
5 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
1 Box 0,32 x 0,36 x 1,16 m
Vol 0,1336 m³
Gross weight 6 Kg Net weight 4 Kg

Notes
Built-in


LED IP65 CE EAC
Bi-volt ø 22,5 cm

Dots

Design by Martín Azúa

A diminutive wall sconce delivers outsized impact in the form of simple, circular dots. Seamlessly connecting a space with an intimate landscape of beams and halos, the collection creates a melody of light like a composition of musical notes in concert with another.

Wall



Ø 17,5 cm

Ajustable: 360° turn.
4662: On-off switch on the back plate.


4660 - 4662



Ø 17,5 cm

Once installed position is fixed and cannot be adjusted.


4665



Ø 17,5 cm

Ajustable: 360° turn.


4670



Ø 17,5 cm

4675

4660



Finishes
- **13/** _ _ Off-White (NCS S 1000-N)
- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED temperature colour
/1 _ 2700 K F
CRI >90 482,65 lm 84 lm/W

Control
4660 _ _ **/** _ **0**
On/ Off
4660 _ _ **/** _ **1**
DALI-2
4660 _ _ **/** _ **3**
1-10V
4660 _ _ **/** _ **4**
TRIAC

Finishes
- **82/** _ _ White oak
- **83/** _ _ American walnut

LED temperature colour
/1 _ 2700 K F
CRI >90 482,65 lm 84 lm/W

Control
4660 _ _ **/** _ **0**
On/ Off
4660 _ _ **/** _ **1**
DALI-2
4660 _ _ **/** _ **3**
1-10V
4660 _ _ **/** _ **4**
TRIAC

Materials
Body: ABS or Natural wood. Diffuser: Polycarbonate.
Canopy: Aluminum.


Light Source and electronics
1 x LED 5,75 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
1 Box 0,13 x 0,22 x 0,21 m
Vol 0,0062 m³
ABS: Gross weight 0,65 Kg
Net weight 0,4 Kg
Natural wood: Gross weight 0,85 Kg
Net weight 0,6 Kg

Notes
22º light halo

LED IP20

4662



Finishes
- **13/** _ _ Off-White (NCS S 1000-N)
- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED temperature colour
/1 _ 2700 K F
CRI >90 482,65 lm 84 lm/W

Control
4662 _ _ **/** _ **0**
On/ Off
4662 _ _ **/** _ **4**
TRIAC

Finishes
- **82/** _ _ White oak
- **83/** _ _ American walnut

LED temperature colour
/1 _ 2700 K F
CRI >90 482,65 lm 84 lm/W

Control
4662 _ _ **/** _ **0**
On/ Off
4662 _ _ **/** _ **4**
TRIAC

Materials
Body: ABS or Natural wood. Diffuser: Polycarbonate.
Canopy: Aluminum.


Light Source and electronics
1 x LED 5,75 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
1 Box 0,13 x 0,22 x 0,21 m
Vol 0,0062 m³
ABS: Gross weight 0,65 Kg
Net weight 0,4 Kg
Natural wood: Gross weight 0,85 Kg
Net weight 0,6 Kg

Notes
22º light halo
Switch on the back plate

LED IP20

4665



Finishes

- **13/** _ _ Off-White (NCS S 1000-N)
- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED temperature colour

/1 _ 2700 K F
CRI >90 482,65 lm 84 lm/W

Control

4665 _ _ **/** _ **0**
On/ Off

Materials

Body: ABS. Diffuser: Polycarbonate.
Canopy: Aluminum.

Light Source and electronics


1 x LED 5,75 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging

1 Box 0,13 x 0,22 x 0,21 m
Vol 0,0062 m³
Gross weight 0,65 Kg Net weight 0,4 Kg

LED IP20

4670



Finishes

- **13/** _ _ Off-White (NCS S 1000-N)
- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED temperature colour

/1 _ 2700 K F
CRI >90 482,65 lm 84 lm/W

Control

4670 _ _ **/** _ **0**
On/ Off

4670 _ _ **/** _ **1**
DALI-2

4670 _ _ **/** _ **3**
1-10V

4670 _ _ **/** _ **4**
TRIAC

Finishes

- **82/** _ _ White oak
- **83/** _ _ American walnut

LED temperature colour

/1 _ 2700 K F
CRI >90 482,65 lm 84 lm/W

Control

4670 _ _ **/** _ **0**
On/ Off

4670 _ _ **/** _ **1**
DALI-2

4670 _ _ **/** _ **3**
1-10V

4670 _ _ **/** _ **4**
TRIAC

Materials

Body: ABS or Natural wood. Diffuser: Polycarbonate.
Canopy: Aluminum.

Light Source and electronics

1 x LED 5,75 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz


Packaging

1 Box 0,13 x 0,22 x 0,21 m
Vol 0,0062 m³
ABS: Gross weight 0,65 Kg
Net weight 0,4 Kg
Natural wood: Gross weight 0,85 Kg
Net weight 0,6 Kg

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

4675



Finishes

- **13/** _ _ Off-White (NCS S 1000-N)
- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED temperature colour

/1 _ 2700 K E
CRI >90 573,83 lm 128 lm/W

Control

4675 _ _ **/** _ **0**
On/ Off

4675 _ _ **/** _ **1**
DALI-2

4675 _ _ **/** _ **3**
1-10V

4675 _ _ **/** _ **4**
TRIAC

Finishes

- **82/** _ _ White oak
- **83/** _ _ American walnut

LED temperature colour

/1 _ 2700 K F
CRI >90 482,65 lm 84 lm/W

Control

4675 _ _ **/** _ **0**
On/ Off

4675 _ _ **/** _ **1**
DALI-2

4675 _ _ **/** _ **3**
1-10V

4675 _ _ **/** _ **4**
TRIAC

Materials

Body: ABS or Natural wood. Diffuser: Polycarbonate.
Canopy: Aluminum.

Light Source and electronics

1 x LED PLATE 4,5 W 500 mA
Constant Current 500 mA
100~240V 50/60Hz

Packaging

1 Box 0,13 x 0,22 x 0,21 m
Vol 0,0062 m^3
ABS: Gross weight 0,65 Kg
Net weight 0,4 Kg
Natural wood: Gross weight 0,85 Kg
Net weight 0,6 Kg

LED IP20 CE




Dots Outdoor

Design by Martín Azúa


Easily mistaken for a stone during the day, this fixture is designed to nestle into the undergrowth of a garden or amongst the potted plants of a patio. Dots Outdoor shines at night with a low, diffuse and indirect glow, the source of which is invisible from almost any angle.

Outdoor



ø 20 cm

4695



ø 16 cm

4697



ø 20 cm


4700



ø 16 cm

4702

4695



Finishes

- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour

/1 _ 2700 K F
CRI >90 750,2 lm 96,18 lm/W

Control

4695 _ _ **/** _ **0**
On/ Off

4695 _ _ **/** _ **1** _ **30**
DALI (Remote)

4695 _ _ **/** _ **Z** _ **30**
Casambi (Remote)

Materials

Body: Aluminium.
Diffuser: Policarbonate.

Light Source and electronics

1 x LED STRIP 7,8W 350 mA
Constant Current 350 mA
100~277V 50/60Hz


Packaging

1 Box 0,30 x 0,27 x 0,18 m
Vol 0,0146 m^3
Gross weight 3,4 Kg Net weight 2,7 Kg

LED IP65 EAC Multi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

4697



Finishes
- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour
/1 _ 2700 K G
CRI >90 375,9 lm 81,72 lm/W

Control
4697 _ _ **/** _ **0**
On/ Off

4697 _ _ **/** _ **1** _ **30**
DALI (Remote)

4697 _ _ **/** _ **Z** _ **30**
Casambi (Remote)


Materials
Body: Aluminium.
Diffuser: Policarbonate.

Light Source and electronics
1 x LED STRP 4,6W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,24 x 0,20 x 0,13 m
Vol 0,0624 m³
Gross weight 1,9 Kg Net weight 1,5 Kg

LED IP65 CE EAC Bi-volt

4700



Finishes
- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour
/1 _ 2700 K F
CRI >90 1445 lm 97,64 lm/W

Control
4700 _ _ **/** _ **0**
On/ Off

4700 _ _ **/** _ **1** _ **30**
DALI (Remote)

4700 _ _ **/** _ **Z** _ **30**
Casambi (Remote)


Materials
Body: Aluminium.
Diffuser: Policarbonate.

Light Source and electronics
1 x LED STRIP 14,8W 350 mA
Constant Current 350 mA
100~277V 50/60Hz

Packaging
1 Box 0,30 x 0,27 x 0,18 m
Vol 0,0146 m³
Gross weight 3,8 Kg Net weight 3,1 Kg

LED IP65 CE EAC Multi-volt

4702



Finishes
- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour
/1 _ 2700 K F
CRI >90 1294 lm 101,1 lm/W

Control
4702 _ _ **/** _ **0**
On/ Off

4702 _ _ **/** _ **1** _ **30**
DALI (Remote)

4702 _ _ **/** _ **Z** _ **30**
Casambi (Remote)

Materials
Body: Aluminium.
Diffuser: Policarbonate.

Light Source and electronics
1 x LED STRIP 12,8W 300 mA
Constant Current 300 mA
100~277V 50/60Hz

Packaging
1 Box 0,24 x 0,20 x 0,13 m
Vol 0,0146 m³
Gross weight 1,9 Kg Net weight 1,5 Kg


LED IP65 CE EAC Multi-volt

Meridiano

Design by Jordi Vilardell & Meritxell Vidal

Meridiano features a grid of steel slots through which LED light radiates outwards in a dramatic sunburst pattern. Topped with foam, it doubles as a seat or side table, its airy architecture integrating easily into outdoor spaces.


Outdoor



4720




4710

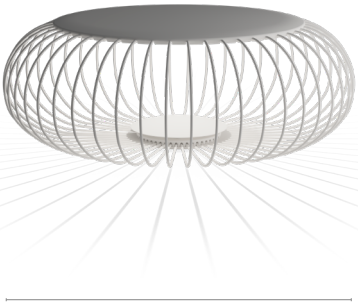

4715

4710



Finishes

07/ _ _ Khaki (RAL 7006)

58/ _ _ Off-white (PANTONE WARM GRAY 2U)

LED temperature colour

/1 _ 2700 K D
CRI >90 1269 lm 141 lm/W

/3 _ 3500 K C
CRI >80 1709 lm 189,9 lm/W

Control

4710 _ _ **/** _ **0**
On/ Off

Materials

Seat: Polyurethane foam. Rods: Steel.
Arm: Steel. Diffuser: Glass.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging


1 Box 0,57 x 0,66 x 0,66 m
Vol 0,2483 m³
Gross weight 18,2 Kg Net weight 15,6 Kg

Notes

It can be connected with or without a plug

LED IP64 CE EAC Bi-volt

4715



Finishes

07/ _ _ Khaki (RAL 7006)

58/ _ _ Off-white (PANTONE WARM GRAY 2U)

LED temperature colour

/1 _ 2700 K D
CRI >90 1269 lm 141 lm/W

/3 _ 3500 K C
CRI >80 1709 lm 189,9 lm/W

Control

4715 _ _ **/** _ **0**
On/ Off

Materials

Seat: Polyurethane foam. Rods: Steel.
Arm: Steel. Diffuser: Glass.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,43 x 0,94 x 0,94 m
Vol 0,38 m³
Gross weight 20,1 Kg Net weight 16,7 Kg

Notes

It can be connected with or without a plug

LED IP64 CE EAC Bi-volt


Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 | 10 | /1 | A

Model
Finish
LED temperature colour
Control



4720



Finishes

07/ _ _ Khaki
(RAL 7006)

58/ _ _ Off-white
(PANTONE
WARM GRAY 2U)

LED temperature colour

/1 _ 2700 K D
CRI >90 1269 lm 141 lm/W

/3 _ 3500 K C
CRI >80 1709 lm 189,9 lm/W

Control

4720 _ _ **/** _ **0**
On/ Off

Materials

Base: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,106 x 0,310 x 0,310 m
Vol 0,102 m^3
Gross weight 1,5 Kg Net weight 1 Kg

LED IP65 CE EAC Bi-volt

June

Design by Ana Mir + Emili Padrós (emiliana design studio)

Inspired by traditional lanterns, June recall
garlands festooned throughout an outdoor space.
Its moon-like spheres cast a warm, ambient glow.

Outdoor




4780



4785

4780



Finishes

● **54/** _ _ Brown
(Pantone Black U)

LED temperature colour

/1 _ 2700 K F
CRI >90 95,5 lm 95 lm/W

Control

4780 _ _ **/** _ **0**
On/ Off

Materials

Diffuser: Opal blown glass.
Tubes: Steel.

Light Source and electronics

1 x LED 1 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 1 x 0,4 x 0,4 m
Vol 0,16 m³
Gross weight 5 Kg Net weight 3 Kg

Notes


Electric cable 4 m

LED IP65 EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.



4785



Finishes

54/ _ _ Brown
(Pantone Black U)

LED temperature colour

/1 _ 2700 K F
CRI >90 190,9 lm 95 lm/W

Control

4785 _ _ **/** _ **0**
On/ Off

Materials

Diffuser: Opal blown glass.
Tubes: Steel.

Light Source and electronics

2 x LED 1 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 1,5 x 0,4 x 0,4 m
Vol 0,24 m³
Gross weight 6 Kg Net weight 4 Kg

Notes

Electric cable 4 m.

LED IP65 EAC Bi-volt

Bamboo

Design by Antoni Arola & Enric Rodríguez

Bamboo's lean, natural form perfectly lends itself to an outdoor setting. Studded with LEDs, it seamlessly integrates with the landscape while adding a wash of light to walkways and common spaces.

Outdoor



4820 | **4800** **4802** | **4801** **4803** | **4804** | **4805** | **4810** | **4811** | **4812**

4800



Finishes

- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED temperature colour

/1 _ 2700 K G
CRI >90 181,2 lm 86 lm/W

/3 _ 3500 K G
CRI >90 181,2 lm 86,3 lm/W

Control

4800 _ _ **/** _ **0**
On/ Off

Materials

Cane: Resin + fiberglass.
Diffuser: Methacrylate.

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100-240V 50/60Hz

Packaging

1 Box 0,125 x 0,125 x 1,3 m
Vol 0,0203 m^3
Gross weight 4 Kg Net weight 3,6 Kg


Notes

Surface

LED IP66 CE EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

4801



Finishes
- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED temperature colour
/1 _ 2700 K G
CRI >90 362,4 lm 86 lm/W
/3 _ 3500 K G
CRI >90 362,4 lm 86,3 lm/W

Control
4801 _ _ **/** _ **0**
On/ Off

Materials
Cane: Resin + fiberglass.
Diffuser: Methacrylate.


Light Source and electronics
2 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0470 m³
Gross weight 8,5 Kg Net weight 6 Kg

Notes
Surface

LED IP66 EAC Bi-volt

4802



Finishes
- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED temperature colour
/1 _ 2700 K G
CRI >90 181,2 lm 86 lm/W
/3 _ 3500 K G
CRI >90 181,2 lm 86,3 lm/W

Control
4802 _ _ **/** _ **0**
On/ Off

Materials
Cane: Resin + fiberglass.
Diffuser: Methacrylate.


Light Source and electronics
1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0480 m³
Gross weight 7 Kg Net weight 5,5 Kg

Notes
Built-in

LED IP66 EAC Bi-volt

4803



Finishes
- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED temperature colour
/1 _ 2700 K G
CRI >90 362,4 lm 86 lm/W
/3 _ 3500 K G
CRI >90 362,4 lm 86,3 lm/W

Control
4803 _ _ **/** _ **0**
On/ Off

Materials
Cane: Resin + fiberglass.
Diffuser: Methacrylate.


Light Source and electronics
2 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0470 m³
Gross weight 8,5 Kg Net weight 5,8 Kg

Notes
Built-in

LED IP66 EAC Bi-volt

4804



Finishes

- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED temperature colour

/1 _ 2700 K G
CRI >90 543,7 lm 86 lm/W

/3 _ 3500 K G
CRI >90 543,7 lm 86,3 lm/W

Control

4804 _ _ **/** _ **0**
On/ Off

Materials

Cane: Resin + fiberglass.
Diffuser: Methacrylate.

Light Source and electronics

3 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,0480 m³
Gross weight 8 Kg Net weight 6,5 Kg

Notes

Built-in

LED IP66 CE EAC Bi-volt

4805



Finishes

- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED temperature colour

/1 _ 2700 K G
CRI >90 724,9 lm 86 lm/W

/3 _ 3500 K G
CRI >90 724,9 lm 86,3 lm/W

Control

4805 _ _ **/** _ **0**
On/ Off

Materials

Cane: Resin + fiberglass.
Diffuser: Methacrylate.

Light Source and electronics

4 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,0600 m³
Gross weight 9 Kg Net weight 7 Kg

Notes

Built-in

LED IP66 CE EAC Bi-volt

4810



Finishes

- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED temperature colour

/1 _ 2700 K G
CRI >90 906,1 lm 86 lm/W

/3 _ 3500 K G
CRI >90 906,1 lm 86,3 lm/W

Control

4810 _ _ **/** _ **0**
On/ Off

Materials

Cane: Resin + fiberglass.
Diffuser: Methacrylate.

Light Source and electronics

5 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging


3 Boxes
Total Vol 0,1388 m³
Gross weight 15 Kg Net weight 12,5 Kg

Notes

Built-in

LED IP66 CE EAC Bi-volt

4811

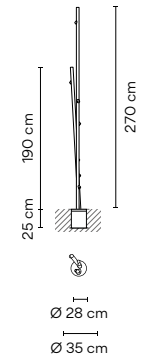

Finishes
- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED temperature colour
- **/1** _ 2700 K G
  CRI >90 1268,5 lm 86 lm/W
- **/3** _ 3500 K G
  CRI >90 1268,5 lm 86,3 lm/W

Control
4811 _ _ **/** _ **0**
On/ Off

Materials
Cane: Resin + fiberglass.
Diffuser: Methacrylate.


Light Source and electronics
7 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
3 Boxes
Total Vol 1,660 m³
Gross weight 16,5 Kg Net weight 13 Kg

Notes
Built-in

LED IP66 CE EAC Bi-volt

4812

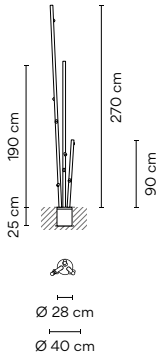

Finishes
- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED temperature colour
- **/1** _ 2700 K G
  CRI >90 1631,0 lm 86 lm/W
- **/3** _ 3500 K G
  CRI >90 1631,0 lm 86,3 lm/W

Control
4812 _ _ **/** _ **0**
On/ Off

Materials
Cane: Resin + fiberglass.
Diffuser: Methacrylate.


Light Source and electronics
9 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
4 Boxes
Total Vol 0,1854 m³
Gross weight 21,6 Kg Net weight 19,44 Kg

Notes
Built-in

LED IP66 CE EAC Bi-volt

4820



Finishes
- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED temperature colour
- **/1** _ 2700 K G
  CRI >90 181,2 lm 86 lm/W
- **/3** _ 3500 K G
  CRI >90 181,2 lm 86,3 lm/W

Control
4820 _ _ **/** _ **0**
On/ Off

Materials
Cane: Resin + fiberglass.
Diffuser: Methacrylate.

Light Source and electronics
1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
1 Box 0,25 x 0,10 x 0,10 m
Vol 0,0025 m³
Gross weight 2 Kg Net weight 1 Kg

Notes
Surface

LED IP66 CE EAC Bi-volt

Duo

Design by Ramos & Bassols

Natural warmth. Simple volumes with a sculptural quality, easily integrated with the architecture of the ceilings where they are fitted allowing the lights to become focal points without being suspended.

Ceiling

4870

ø 47,5 cm



4872

ø 78,5 cm



4874

ø 35 cm



4878

ø 70 cm



4876

ø 35 cm




4880

ø 70 cm



4870



Finishes

- **18/** _ _ Graphite (Adapta RF9913WX)
- **58/** _ _ Cream (RAL 7044)
- **93/** _ _ White (RAL 9016)

Finish customization (Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K F
CRI >90 2207,0 lm 98 lm/W

/3 _ 3500 K F
CRI >80 2304 lm 102,30 lm/W

/4 _ 4000 K F
CRI >90 2364,6 lm 105,1 lm/W

Control

4870 _ _ **/** _ **A**
DALI-2, 1-10V, Push

4870 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Main Body: Aluminum.
Inner structure: Oak wood.

Light Source and electronics

1 x LED PLATE 26,5 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz


Packaging

1 Box 0,56 x 0,56 x 0,26 m
Vol 0,0815 m^3
Gross weight 7 Kg Net weight 6 Kg

LED IP20 CE EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

4872



Finishes

- **18/** _ _ Graphite (Adapta RF9913WX)
- **58/** _ _ Cream (RAL 7044)
- **93/** _ _ White (RAL 9016)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K F
CRI >90 3959,0 lm 100 lm/W

/3 _ 3500 K E
CRI >90 4133 lm 104,39 lm/W

/4 _ 4000 K F
CRI >90 4241,8 lm 107,3 lm/W

Control

4872 _ _ **/** _ **A**
DALI-2, 1-10V, Push

4872 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Main Body: Aluminum.
Inner structure: Oak wood.

Light Source and electronics


1 x LED PLATE 50 W 700 mA
Constant Current 750 mA
110~240V 50/60Hz

Packaging

1 Box 0,9 x 0,9 x 0,25 m
Vol 0,2025 m³
Gross weight 19 Kg Net weight 17 Kg

LED IP20 CE EAC Bi-volt

4874



Finishes

- **18/** _ _ Graphite (Adapta RF9913WX)
- **58/** _ _ Cream (RAL 7044)
- **93/** _ _ White (RAL 9016)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K G
CRI >90 644,7 lm 54 lm/W

/3 _ 3500 K G
CRI >90 632 lm 52,6 lm/W

/4 _ 4000 K G
CRI >90 690,7 lm 57,6 lm/W

Control

4874 _ _ **/** _ **1**
DALI-2

4874 _ _ **/** _ **B**
1-10V, Push

4874 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Main Body: Aluminum.
Inner structure: Oak wood.

Light Source and electronics


1 x LED PLATE 12 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,44 x 0,44 x 0,35 m
Vol 0,0678 m³
Gross weight 5 Kg Net weight 4 Kg

LED IP20 CE EAC Bi-volt

4876



Finishes

- **18/** _ _ Graphite (Adapta RF9913WX)
- **58/** _ _ Cream (RAL 7044)
- **93/** _ _ White (RAL 9016)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K G
CRI >90 644,7 lm 54 lm/W

/3 _ 3500 K G
CRI >90 632 lm 52,6 lm/W

/4 _ 4000 K G
CRI >90 690,7 lm 57,6 lm/W

Control

4876 _ _ **/** _ **1**
DALI-2

4876 _ _ **/** _ **B**
1-10V, Push

4876 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Main Body: Aluminum.
Inner structure: Oak wood.

Light Source and electronics

1 x LED PLATE 12 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz


Packaging

1 Box 0,44 x 0,44 x 0,35 m
Vol 0,0678 m³
Gross weight 5 Kg Net weight 4 Kg

LED IP20 CE EAC Bi-volt

1160 | 10 | /1 | A
Model | Finish | LED temperature colour | Control

4878



Finishes

- **18/** _ _ Graphite (Adapta RF9913WX)
- **58/** _ _ Cream (RAL 7044)
- **93/** _ _ White (RAL 9016)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K F
CRI >90 2207 lm 98 lm/W

/3 _ 3500 K F
CRI >90 2304 lm 102,30 lm/

/4 _ 4000 K F
CRI >90 2364,6 lm 105,1 lm/W

Control

4878 _ _ **/** _ **A**
DALI-2, 1-10V, Push

4878 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Main Body: Aluminum.
Inner structure: Oak wood.

Light Source and electronics


1 x LED PLATE 26,5 W 700 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,79 x 0,79 x 0,59 m
Vol 0,3682 m³
Gross weight 16 Kg Net weight 14 Kg

LED IP20 CE EAC Bi-volt

4880



Finishes

- **18/** _ _ Graphite (Adapta RF9913WX)
- **58/** _ _ Cream (RAL 7044)
- **93/** _ _ White (RAL 9016)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K F
CRI >90 2207 lm 98 lm/W

/3 _ 3500 K F
CRI >90 2304 lm 102,30 lm/W

/4 _ 4000 K F
CRI >90 2364,6 lm 105,1 lm/W

Control

4880 _ _ **/** _ **A**
DALI-2, 1-10V, Push

4880 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Main Body: Aluminum.
Inner structure: Oak wood.

Light Source and electronics

1 x LED PLATE 26,5 W 700 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,79 x 0,79 x 0,59 m
Vol 0,3682 m³
Gross weight 16 Kg Net weight 14 Kg

LED IP20 CE EAC Bi-volt



Warm

Design by Ramos & Bassols

Offering a contemporary take on a timeless design, Warm features a generously sized, classic drum shade, with a careful selected colour palette that provides a contemporary touch.

Table




4895 4896



4900 4901

4895



Finishes

10 White
(NCS S 0300-N)

LED 2700 K 470 lm

4895 10

Materials

Shade: Screen. Diffuser: Methacrylate.
Rod: Aluminum. Base: Steel.

Light Source and electronics

3 x LED G9 230V 3,8 W

Packaging


2 Boxes
Total Vol 0,0390 m³
Gross weight 2,9 Kg Net weight 1,3 Kg

Notes

On/off switch on the cable.
Electric cable 2 m

IP20 CE EAC

4896



Finishes

10 White
(NCS S 0300-N)
25 Beige D1
(NCS S 4005-Y50R)
28 Brown M1
(NCS S 4020-Y60R)
56 Green D1
(NCS S 7010-G30Y)
Finish customization
(Available options:
Vibia colour palette)

LED 2700 K 470 lm

4896 _ _

Materials

Shade: Aluminum. Diffuser: Methacrylate.
Rod: Aluminum. Base: Steel.

Light Source and electronics

3 x LED G9 230V 3,8 W

Packaging

2 Boxes
Total Vol 0,0390 m³
Gross weight 2,9 Kg Net weight 2 Kg

Notes


On/off switch on the cable.
Electric cable 2 m

IP20 CE EAC

Product specifications subject to change without notice. Please check vibia.com for updated information.



4900



Finishes

10 White
(NCS S 0300-N)

LED 2700 K 1520 lm

4900 10

Materials

Shade: Screen. Diffuser: Methacrylate.
Rod: Aluminum. Base: Steel.

Light Source and electronics

3 x LED E27 230V 12 W

Packaging


2 Boxes
Total Vol 0,2153 m³
Gross weight 4,3 Kg Net weight 3,8 Kg

Notes

On/off switch on the cable.
Electric cable 2 m

IP20 CE EAC

4901



Finishes

10 White
(NCS S 0300-N)

LED 2700 K 1520 lm

25 Beige D1
(NCS S 4005-Y50R)
28 Brown M1
(NCS S 4020-Y60R)
56 Green D1
(NCS S 7010-G30Y)

Finish customization
(Available options:
Vibia colour palette)

4901 _ _

Materials

Shade: Aluminum. Diffuser: Methacrylate.
Rod: Aluminum. Base: Steel.

Light Source and electronics

3 x LED E27 230V 12 W

Packaging

2 Boxes
Total Vol 0,2153 m³
Gross weight 4,8 Kg Net weight 4,3 Kg

Notes


On/off switch on the cable.
Electric cable 2 m

IP20 CE EAC

Floor




4905 4906

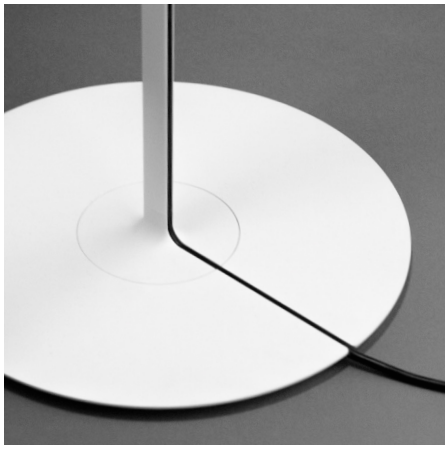



4905



Finishes

10 White (NCS S 0300-N)

LED 2700 K 1520 lm

4905 10

Materials

Shade: Screen. Diffuser: Methacrylate.
Rod: Aluminum. Base: Steel.

Light Source and electronics

3 x LED E27 230V 12 W

Packaging


2 Boxes
Total Vol 0,3426 m³
Gross weight 10,2 Kg Net weight 6,3 Kg

Notes

On/off switch on the cable.
Electric cable 2,5 m

IP20 CE EAC

4906



Finishes

10 White (NCS S 0300-N)
25 Beige D1 (NCS S 4005-Y50R)
28 Brown M1 (NCS S 4020-Y60R)
56 Green D1 (NCS S 7010-G30Y)

Finish customization (Available options: Vibia colour palette)

LED 2700 K 1520 lm

4906 _ _

Materials

Shade: Aluminum. Diffuser: Methacrylate.
Rod: Aluminum. Base: Steel.

Light Source and electronics

3 x LED E27 230V 12 W

Packaging

2 Boxes
Total Vol 0,3426 m³
Gross weight 10,7 Kg Net weight 6,8 Kg

Notes

On/off switch on the cable.
Electric cable 2,5 m

IP20 CE EAC





Pendants

4925 4926



ø 62 cm

4930




ø 90 cm





4925



Finishes

10 White
(NCS S 0300-N)

LED 2700 K 1520 lm

4925 10

Materials

Shade: Screen. Canopy: Steel.
Diffuser: Methacrylate.

Light Source and electronics

4 x LED E27 230V 12 W

Packaging


1 Box 0,68 x 0,68 x 0,39 m
Vol 0,18 m³
Gross weight 7,7 Kg Net weight 3,9 Kg

Notes

Extra cable length.

IP20 CE EAC

4926



Finishes

10 White
(NCS S 0300-N)

LED 2700 K 1520 lm

4926 _ _

25 Beige D1
(NCS S 4005-Y50R)
28 Brown M1
(NCS S 4020-Y60R)
56 Green D1
(NCS S 7010-G30Y)
Finish customization
(Available options:
Vibia colour palette)

Materials

Shade: Aluminum. Canopy: Steel.
Diffuser: Methacrylate.

Light Source and electronics

4 x LED E27 230V 12 W

Packaging


1 Box 0,77 x 0,77 x 0,50 m
Vol 0,2965 m³
Gross weight 8,9 Kg Net weight 5,1 Kg

Notes

Extra cable length.

IP20 CE EAC

4930



Finishes

10 White
(NCS S 0300-N)

LED 2700 K 1520 lm

4930 10

Materials

Shade: Screen. Canopy: Steel.
Diffuser: Methacrylate.

Light Source and electronics

4 x LED E27 230V 12 W

Packaging

1 Box 1,58 x 0,86 x 1,58 m
Vol 2,1469 m³
Gross weight 11,7 Kg Net weight 10,8 Kg

Notes

Extra cable length.
UNTIL STOCK RUNS OUT


IP20 CE EAC

Ghost


Design by Arik Levy

A study in contrasts, the Ghost collection embodies both spirit and materiality, discretion and presence. A contemporary reimagining of the grand lights that once graced entryways and living areas, its sensuous form radiates a welcoming, luminous sensitivity.


Table

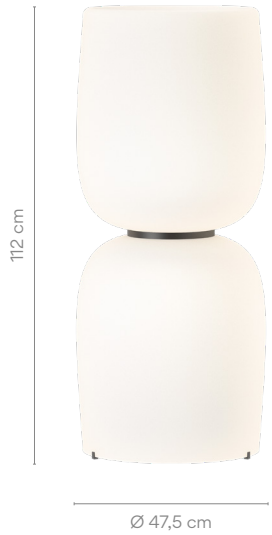

4960

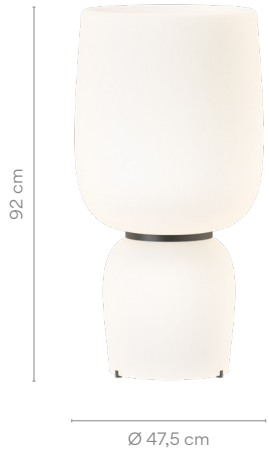

4965

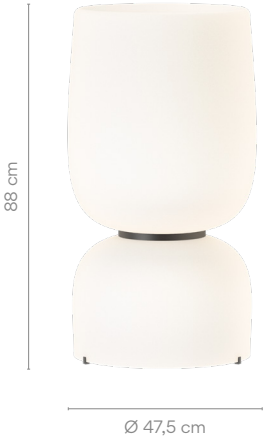


4970

A colour glass diffuser can be placed in the lower glass for an amber or burgundy light effect




Dimming and installation options

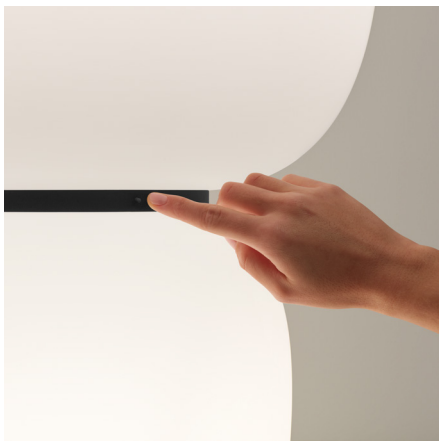




/15: Push-dimming model equipped with two buttons, one for each diffuser. A quick push turns the light on and off, a longer pression dims the light.

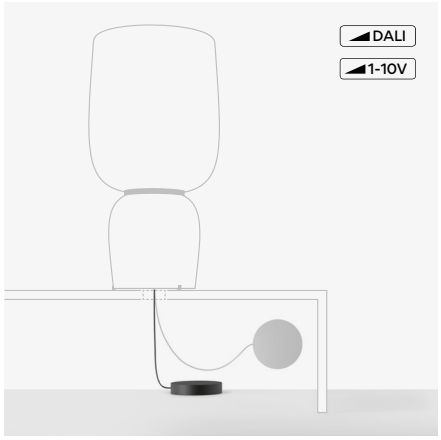



Dimming and installation options: The driver of the DALI, 1-10V and Casambi versions is enclosed in a box at the end of the cable.

4960

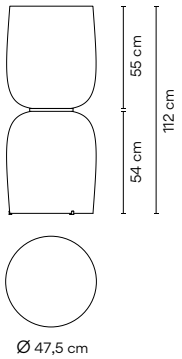

Finishes

11/ _ _ Black
(NCS S 8500-N)

LED temperature colour

/1 _ 2700 K D
CRI >90 5432,0 lm 137 lm/W

Control

4960 _ _ / _ 1
DALI

4960 _ _ / _ 3
1-10V

4960 _ _ / _ 5
Push

4960 _ _ / _ Z
Casambi

Materials

Diffuser: Opal Glass.
Metal parts: Aluminum.

Light Source and electronics

2 x LED 19,8 W 800 mA
Constant Current 800 mA
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,6051 m³
Gross weight 25,7 Kg Net weight 22,7 Kg


Notes

A colour glass diffuser can be placed in the lower glass for an amber or burgundy light effect. Electric cable 2 m.

Extra cable length.

LED IP20 Dimmer Bi-volt

4965



Finishes

● **11/** _ _ Black
(NCS S 8500-N)

LED temperature colour

/1 _ 2700 K D
CRI >90 5432,0 lm 137 lm/W

Control

4965 _ _ **/** _ **1**
DALI

4965 _ _ **/** _ **3**
1-10V

4965 _ _ **/** _ **5**
Push

4965 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Opal Glass.
Metal parts: Aluminum.

Light Source and electronics

2 x LED 19,8 W 800 mA
Constant Current 800 mA
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,6051 m³
Gross weight 20,6 Kg Net weight 17,6 Kg


Notes

A colour glass diffuser can be placed in the lower glass for an amber or burgundy light effect. Electric cable 2 m.

Extra cable length.

LED □ IP20 CE Dimmer Bi-volt

4970



Finishes

● **11/** _ _ Black
(NCS S 8500-N)

LED temperature colour

/1 _ 2700 K D
CRI >90 5432,0 lm 137 lm/W

Control

4970 _ _ **/** _ **1**
DALI

4970 _ _ **/** _ **3**
1-10V

4970 _ _ **/** _ **5**
Push

4970 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Opal Glass.
Metal parts: Aluminum.

Light Source and electronics

2 x LED 19,8 W 800 mA
Constant Current 800 mA
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,6051 m³
Gross weight 21,7 Kg Net weight 18,7 Kg

Notes

A colour glass diffuser can be placed in the lower glass for an amber or burgundy light effect. Electric cable 2 m.

Extra cable length.

LED □ IP20 CE Dimmer Bi-volt


Pendants

4987



Ø 47,5 cm

4987



Finishes

11/ _ _ Black
(NCS S 8500-N)

LED temperature colour

/1 _ 2700 K D
CRI >90 4826,7 lm 130 lm/W

Control

4987 _ _ / _ A
DALI-2, 1-10V, Push

4987 _ _ / _ Z
Casambi

Materials

Diffuser: Opal Glass.
Metal parts: Aluminum.

Light Source and electronics

1 x LED 37,2 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging

1 Box 0,61 x 0,62 x 0,80 m
Vol 0,3026 m^3
Gross weight 13,9 Kg Net weight 12,4 Kg
Extra cable length.


LED IP20 Dimmer Bi-volt

Balance

Design by Jordi Vilardell

Balance features a classic drum shade cantilevered from its column. Adjusting a small pull cord on the diffuser activates the fixture's counterweight system, enabling it to move to the right or left, or up or down-all the while remaining parallel to the floor.

Floor

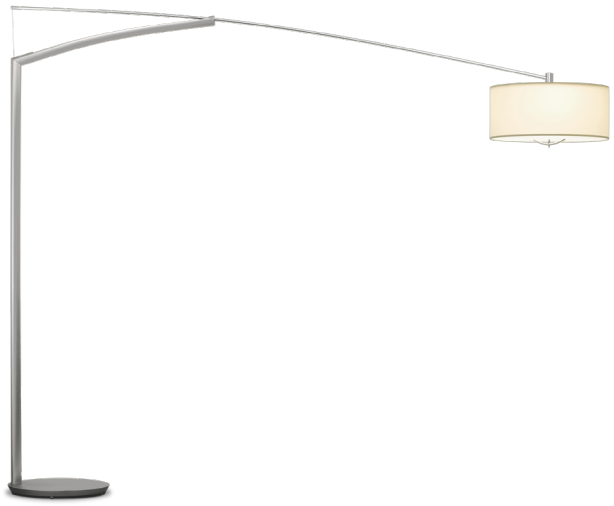

210 x 260 cm


5189 5190



210 x 215 cm

5191 5192

5189



Finishes

- **01** Chrome (Metallic finish)
- **18** Graphite (RAL 7016)
- **30** Nickel (Metallic finish)

Materials

Vertical tube: Aluminum. Base: Steel.
Arm: Inox. Shade: Grey fabric.

Light Source and electronics

LED 2700K 1520 lm Dim
3 x E27 230V 12 W

Control

5189 _ _
Push

Packaging

3 Boxes
Total Vol 0,3472 m^3
Gross weight 53,8 Kg Net weight 49,5 Kg


Notes

Dimmer on the cable. 3 m

IP20 EAC Dimmer

Product specifications subject to change without notice. Please check vibia.com for updated information.

5190



Finishes

01 Chrome
(Metallic finish)
18 Graphite
(RAL 7016)
30 Nickel
(Metallic finish)

Materials

Vertical tube: Aluminum. Base: Steel.
Arm: Inox. Shade: Parchment.

Light Source and electronics

LED 2700K 1520 lm Dim
3 x E27 230V 12 W

Control

5190 _ _
Push

Packaging


3 Boxes
Total Vol 0,3472 m³
Gross weight 53,8 Kg Net weight 49,5 Kg

Notes

Dimmer on the cable. 3 m

IP20 EAC Dimmer

5191



Finishes

01 Chrome
(Metallic finish)
30 Nickel
(Metallic finish)

Materials

Vertical tube: Aluminum. Base: Steel.
Arm: Inox. Shade: Parchment.

Light Source and electronics

LED 2700K 1520 lm Dim
3 x E27 230V 12 W

Control

5191 _ _
Push

Packaging


3 Boxes
Total Vol 0,3472 m³
Gross weight 53,8 Kg Net weight 49,1 Kg

Notes

Dimmer on the cable. 3 m

IP20 EAC Dimmer

5192



Finishes

01 Chrome
(Metallic finish)
18 Graphite
(RAL 7016)
30 Nickel
(Metallic finish)

Materials

Vertical tube: Aluminum. Base: Steel.
Arm: Inox. Shade: Grey fabric.

Light Source and electronics

LED 2700K 1520 lm Dim
3 x E27 230V 12 W

Control

5192 _ _
Push

Packaging

3 Boxes
Total Vol 0,3472 m³
Gross weight 53,8 Kg Net weight 49,1 Kg

Notes

Dimmer on the cable. 3 m

IP20 EAC Dimmer

Puck

Design by Jordi Vilardell

Inspired by the classic circle silhouette, Puck panel light's simple, spherical forms can be superimposed on one another, lending sensibility overhead. Crafted of premium, opal triplex blown glass, it casts a warm glow.

Ceiling Wall



16 cm

5400 5402



24,4 cm

5410



27,2 cm


5412

31,8 cm

5425 5427


46,7 cm

5430 5432




56,8 cm

5435 5437



53,2 cm


5440 5442



79 cm

5445 5447

5400



Finishes

03 White
(RAL 9016)

LED temperature colour

2700 K 470 lm

5400 03

Materials

Canopy: Aluminum.
Diffuser: Blown-glass.

Light Source and electronics

1 x LED G9 4,2 W

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0175 m³
Gross weight 0,85 Kg Net weight 0,6 Kg


Notes

UNTIL STOCK RUNS OUT

IP20 CE EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

5402



Finishes
03/ _ _ White
(RAL 9016)

LED temperature colour
/1 _ 2700 K D
CRI >90 415,7 lm 130 lm/W

Control
5402 _ _ **/** _ **0**
On/ Off

Materials
Canopy: Aluminum.
Diffuser: Blown-glass.


Light Source and electronics
1 x LED PLATE 3,2 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0175 m³
Gross weight 0,85 Kg Net weight 0,6 Kg

Notes
UNTIL STOCK RUNS OUT

IP20 CE EAC Bi-volt

5410



Finishes
03 White
(RAL 9016)

LED temperature colour
2700 K 470 lm

Control
5410 03


Materials
Canopy: Aluminum.
Diffuser: Blown-glass.

Light Source and electronics
2 x LED G9 4,2 W

Packaging
1 Box 0,37 x 0,37 x 0,23 m
Vol 0,0315 m³
Gross weight 0,95 Kg Net weight 0,7 Kg

IP20 CE EAC Bi-volt

5412



Finishes
03/ _ _ White
(RAL 9016)

LED temperature colour
/1 _ 2700 K E
CRI >90 880,1 lm 116 lm/W

Control
5412 _ _ **/** _ **0**
On/ Off


Materials
Canopy: Aluminum.
Diffuser: Blown-glass.

Light Source and electronics
1 x LED PLATE 7,6 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,37 x 0,37 x 0,23 m
Vol 0,0315 m³
Gross weight 0,95 Kg Net weight 0,7 Kg

IP20 CE EAC Bi-volt

5425



Finishes
03 White
(RAL 9016)

LED temperature colour
2700 K 470 lm

5425 03

Materials
Canopy: Aluminum.
Diffuser: Blown-glass.


Light Source and electronics
2 x LED G9 4,2 W

Packaging
1 Box 0,25 x 0,42 x 0,42 m
Vol 0,0441 m³
Gross weight 2,26 Kg Net weight 1,08 Kg

Notes
All version require only one electrical connection

IP20 CE EAC Bi-volt

5427



Finishes
03/ _ _ White
(RAL 9016)

LED temperature colour
/1 _ 2700 K D
CRI >90 831,4 lm 130 lm/W

Control
5427 _ _ **/** _ **0**
On/ Off

Materials
Canopy: Aluminum.
Diffuser: Blown-glass.


Light Source and electronics
2 x LED PLATE 3,2 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,25 x 0,42 x 0,42 m
Vol 0,0441 m³
Gross weight 2,26 Kg Net weight 1,08 Kg

Notes
All version require only one electrical connection

IP20 CE EAC Bi-volt

5430



Finishes
03 White
(RAL 9016)

LED temperature colour
2700 K 470 lm

5430 03

Materials
Canopy: Aluminum.
Diffuser: Blown-glass.


Light Source and electronics
2 x LED G9 4,2 W

Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 4,2 Kg Net weight 2,15 Kg

Notes
All version require only one electrical connection

IP20 CE EAC Bi-volt

5432



Finishes
03/ _ _ White
(RAL 9016)

LED temperature colour
/1 _ 2700 K E
CRI >90 1760,2 lm 116 lm/W

Control
5432 _ _ **/** _ **0**
On/ Off

Materials
Canopy: Aluminum.
Diffuser: Blown-glass.


Light Source and electronics
2 x LED PLATE 7,6 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 4,2 Kg Net weight 2,15 Kg

Notes
All version require only one electrical connection

IP20 CE EAC Bi-volt

5435



Finishes
03 White
(RAL 9016)

LED temperature colour
2700 K 470 lm

5435 03

Materials
Canopy: Aluminum.
Diffuser: Blown-glass.


Light Source and electronics
3 x LED G9 4,2 W

Packaging
2 Boxes
Total Vol 0,0780 m³
Gross weight 7,5 Kg Net weight 4,1 Kg

Notes
All version require only one electrical connection

IP20 CE EAC Bi-volt

5437



Finishes
03/ _ _ White
(RAL 9016)

LED temperature colour
/1 _ 2700 K E
CRI >90 2640,4 lm 116 lm/W

Control
5437 _ _ **/** _ **0**
On/ Off

Materials
Canopy: Aluminum.
Diffuser: Blown-glass.


Light Source and electronics
3 x LED PLATE 7,6 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0780 m³
Gross weight 7,5 Kg Net weight 4,1 Kg

Notes
All version require only one electrical connection

IP20 CE EAC Bi-volt

5440



Finishes
03 White
(RAL 9016)

LED temperature colour
2700 K 470 lm

5440 03

Materials
Canopy: Aluminum.
Diffuser: Blown-glass.


Light Source and electronics
2 x LED G9 4,2 W

Packaging
2 Boxes
Total Vol 0,1060 m³
Gross weight 7,8 Kg Net weight 4,57 Kg

Notes
All version require only one electrical connection.
UNTIL STOCK RUNS OUT

IP20 CE EAC Bi-volt

5442



Finishes
03/ _ _ White
(RAL 9016)

LED temperature colour
/1 _ 2700 K E
CRI >90 3520,5 lm 116 lm/W

Control
5442 _ _ **/** _ **0**
On/ Off

Materials
Canopy: Aluminum.
Diffuser: Blown-glass.


Light Source and electronics
4 x LED PLATE 7,6 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1060 m³
Gross weight 7,8 Kg Net weight 4,57 Kg

Notes
All version require only one electrical connection.
UNTIL STOCK RUNS OUT

IP20 CE EAC Bi-volt

5445



Finishes
03 White
(RAL 9016)

LED temperature colour
2700 K 470 lm

5445 03

Materials
Canopy: Aluminum.
Diffuser: Blown-glass.


Light Source and electronics
7 x LED G9 4,2 W

Packaging
2 Boxes
Total Vol 0,19 m³
Gross weight 12,5 Kg Net weight 8,84 Kg

Notes
All version require only one electrical connection.
UNTIL STOCK RUNS OUT

IP20 CE EAC Bi-volt

5447



Finishes
03/ _ _ White
(RAL 9016)

LED temperature colour
/1 _ 2700 K E
CRI >90 6160,8 lm 116 lm/W

Control
5447 _ _ **/** _ **0**
On/ Off

Materials
Canopy: Aluminum.
Diffuser: Blown-glass.

Light Source and electronics
7 x LED PLATE 7,6 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,19 m³
Gross weight 12,5 Kg Net weight 8,84 Kg

Notes
All version require only one electrical connection.
UNTIL STOCK RUNS OUT

IP20 CE EAC Bi-volt

Puck Wall Art

Design by Jordi Vilardell

Puck Wall Art is comprised of different disks to create a warm, visually sharp and mathematically creative effect. There are four sizes of disks, allowing the designer to play with varied combinations of indirect light. The resulting design comprises a set of highly dynamic, sculptural compositions.

Wall



ø 30 cm

5470



ø 40 cm

5471




ø 45 cm

5472




ø 46 cm

5474




ø 60 cm

5476




58 cm

5480




69 cm

5481




68 cm

5485

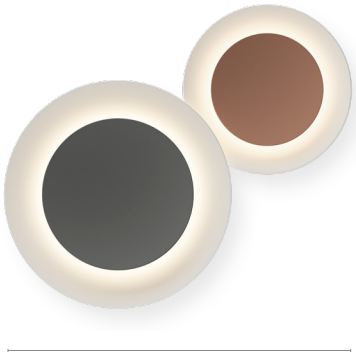


87 cm

5487

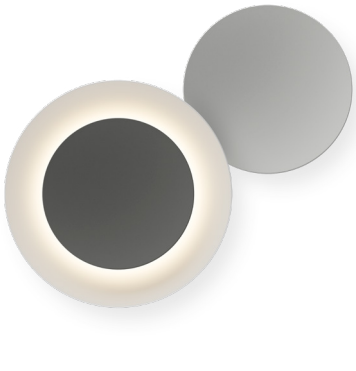

87 cm

5486

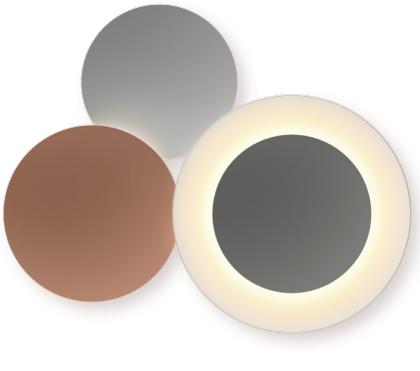


103 cm


5491

Product specifications subject to change without notice. Please check vibia.com for updated information.

Each project is unique.
Personalise your own
Puck Wall Art composition
quick and easy.

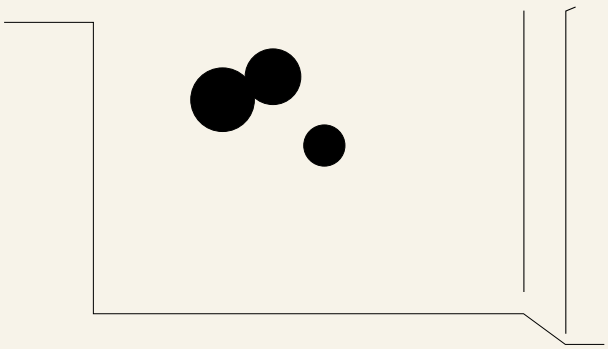

5470



Finishes

- **15/** _ _ Grey L2 (NCS S 2500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **28/** _ _ Brown M1 (NCS S 4020-Y60R)

LED temperature colour

- **/1** _ 2700 K E CRI >90 952,5 lm 113 lm/W
- **/3** _ 3500 K E CRI >90 1017,4 lm 121,1 lm/W

Control

- **5470** _ _ **/** _ **1** DALI-2
- **5470** _ _ **/** _ **3** 1-10V
- **5470** _ _ **/** _ **4** Triac
- **5470** _ _ **/** _ **5** Push
- **5470** _ _ **/** _ **Z** Casambi

Finishes

- **76/** _ _ Grey Felt L1
- **77/** _ _ Grey Felt D1

LED temperature colour

- **/1** _ 2700 K E CRI >90 952,5 lm 113 lm/W
- **/3** _ 3500 K E CRI >90 1017,4 lm 121,1 lm/W

Control

- **5470** _ _ **/** _ **1** DALI-2
- **5470** _ _ **/** _ **3** 1-10V
- **5470** _ _ **/** _ **4** Triac
- **5470** _ _ **/** _ **5** Push
- **5470** _ _ **/** _ **Z** Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
Wall support: Aluminum.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
Constant Current 700 mA

/ _ 1 110~240V 50/60Hz Bi-volt
/ _ 3 110~240V 50/60Hz Bi-volt
/ _ 5 110~240V 50/60Hz Bi-volt
/ _ 4 220~240V 50/60Hz
/ _ Z 220~240V 50/60Hz

Packaging


1 Box 0,34 x 0,34 x 0,23 m
Vol 0,0266 m^3
Gross weight 2,6 Kg Net weight 1,6 Kg

Notes

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP20 CE EAC
Dimmer Bi-volt

5471



Finishes

- **15/** _ _ Grey L2 (NCS S 2500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **28/** _ _ Brown M1 (NCS S 4020-Y60R)

LED temperature colour

/1 _ 2700 K E
CRI >90 1435,9 lm 114 lm/W

/3 _ 3500 K E
CRI >90 1533,8 lm 121,7 lm/W

Control

5471 _ _ **/** _ **1**
DALI-2

5471 _ _ **/** _ **3**
1-10V

5471 _ _ **/** _ **4**
Triac

5471 _ _ **/** _ **5**
Push

5471 _ _ **/** _ **Z**
Casambi

Finishes

- **76/** _ _ Grey Felt L1
- **77/** _ _ Grey Felt D1

LED temperature colour

/1 _ 2700 K E
CRI >90 1435,9 lm 114 lm/W

/3 _ 3500 K E
CRI >90 1533,8 lm 121,7 lm/W

Control

5471 _ _ **/** _ **1**
DALI-2

5471 _ _ **/** _ **3**
1-10V

5471 _ _ **/** _ **4**
Triac

5471 _ _ **/** _ **5**
Push

5471 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
Wall support: Aluminum.

Light Source and electronics

1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA

/ _ **1** 110~240V 50/60Hz Bi-volt
/ _ **3** 110~240V 50/60Hz Bi-volt
/ _ **5** 110~240V 50/60Hz Bi-volt
/ _ **4** 220~240V 50/60Hz
/ _ **Z** 220~240V 50/60Hz

Packaging


1 Box 0,44 x 0,44 x 0,25 m
Vol 0,0484 m^3
Gross weight 3,5 Kg Net weight 1,9 Kg

Notes

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP20 CE EAC Bi-volt

5472



Finishes

- **15/** _ _ Grey L2 (NCS S 2500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **28/** _ _ Brown M1 (NCS S 4020-Y60R)

LED temperature colour

/1 _ 2700 K E
CRI >90 1435,9 lm 114 lm/W

/3 _ 3500 K E
CRI >90 1533,8 lm 121,7 lm/W

Control

5472 _ _ **/** _ **1**
DALI-2

5472 _ _ **/** _ **3**
1-10V

5472 _ _ **/** _ **4**
Triac

5472 _ _ **/** _ **5**
Push

5471 _ _ **/** _ **Z**
Casambi

Finishes

- **76/** _ _ Grey Felt L1
- **77/** _ _ Grey Felt D1

LED temperature colour

/1 _ 2700 K E
CRI >90 1435,9 lm 114 lm/W

/3 _ 3500 K E
CRI >90 1533,8 lm 121,7 lm/W

Control

5472 _ _ **/** _ **1**
DALI-2

5472 _ _ **/** _ **3**
1-10V

5472 _ _ **/** _ **4**
Triac

5472 _ _ **/** _ **5**
Push

5472 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
Wall support: Aluminum.

Light Source and electronics

1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA

/ _ **1** 110~240V 50/60Hz Bi-volt
/ _ **3** 110~240V 50/60Hz Bi-volt
/ _ **5** 110~240V 50/60Hz Bi-volt
/ _ **4** 220~240V 50/60Hz
/ _ **Z** 220~240V 50/60Hz

Packaging


1 Box 0,51 x 0,51 x 0,26 m
Vol 0,0676 m^3
Gross weight 4,75 Kg Net weight 2,25 Kg

Notes

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP20 CE EAC Bi-volt

5474



Finishes

- **15/** _ _ Grey L2 (NCS S 2500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **28/** _ _ Brown M1 (NCS S 4020-Y60R)

LED temperature colour

/1 _ 2700 K E
CRI >90 952,5 lm 113 lm/W

/3 _ 3500 K E
CRI >90 1017,4 lm 121,1 lm/W

Control

5474 _ _ **/** _ **1**
DALI-2

5474 _ _ **/** _ **3**
1-10V

5474 _ _ **/** _ **4**
Triac

5474 _ _ **/** _ **5**
Push

5474 _ _ **/** _ **Z**
Casambi

Finishes

- **71/** _ _ Grey Felt L1 & Grey Felt D1
- **76/** _ _ Grey Felt L1

LED temperature colour

/1 _ 2700 K E
CRI >90 952,5 lm 113 lm/W

/3 _ 3500 K E
CRI >90 1017,4 lm 121,1 lm/W

Control

5474 _ _ **/** _ **1**
DALI-2

5474 _ _ **/** _ **3**
1-10V

5474 _ _ **/** _ **4**
Triac

5474 _ _ **/** _ **5**
Push

5474 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
Wall support: Aluminum. Ring: Steel.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
Constant Current 700 mA

/ _ **1** 110~240V 50/60Hz Bi-volt
/ _ **3** 110~240V 50/60Hz Bi-volt
/ _ **5** 110~240V 50/60Hz Bi-volt
/ _ **4** 220~240V 50/60Hz
/ _ **Z** 220~240V 50/60Hz

Packaging


1 Box 0,51 x 0,51 x 0,26 m
Vol 0,0676 m^3
Gross weight 4,75 Kg Net weight 2,25 Kg

Notes

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP20 CE EAC Bi-volt

5476



Finishes

- **15/** _ _ Grey L2 (NCS S 2500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **28/** _ _ Brown M1 (NCS S 4020-Y60R)

LED temperature colour

/1 _ 2700 K E
CRI >90 1435,9 lm 114 lm/W

/3 _ 3500 K E
CRI >90 1533,8 lm 121,7 lm/W

Control

5476 _ _ **/** _ **1**
DALI-2

5476 _ _ **/** _ **3**
1-10V

5476 _ _ **/** _ **4**
Triac

5476 _ _ **/** _ **5**
Push

5476 _ _ **/** _ **Z**
Casambi

Finishes

- **71/** _ _ Grey Felt L1 & Grey Felt D1
- **76/** _ _ Grey Felt L1

LED temperature colour

/1 _ 2700 K E
CRI >90 1435,9 lm 114 lm/W

/3 _ 3500 K E
CRI >90 1533,8 lm 121,7 lm/W

Control

5476 _ _ **/** _ **1**
DALI-2

5476 _ _ **/** _ **3**
1-10V

5476 _ _ **/** _ **4**
Triac

5476 _ _ **/** _ **5**
Push

5476 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
Wall support: Aluminum. Ring: Steel.

Light Source and electronics

1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA

/ _ **1** 110~240V 50/60Hz Bi-volt
/ _ **3** 110~240V 50/60Hz Bi-volt
/ _ **5** 110~240V 50/60Hz Bi-volt
/ _ **4** 220~240V 50/60Hz
/ _ **Z** 220~240V 50/60Hz

Packaging


1 Box 0,66 x 0,66 x 0,235 m
Vol 0,1024 m^3
Gross weight 6,3 Kg Net weight 2,9 Kg

Notes

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP20 CE EAC Bi-volt

5480



Finishes

- **15/** _ _ Grey L2 (NCS S 2500-N)
- **28/** _ _ Brown M1 (NCS S 4020-Y60R)
- **72/** _ _ Grey D1 & Grey L2

LED temperature colour

- **/1** _ 2700 K E CRI >90 2388,4 lm 114 lm/W
- **/3** _ 3500 K E CRI >90 2551,3 lm 121,5 lm/W

Control

- **5480** _ _ **/** _ **1** DALI-2
- **5480** _ _ **/** _ **3** 1-10V
- **5480** _ _ **/** _ **4** Triac
- **5480** _ _ **/** _ **5** Push
- **5480** _ _ **/** _ **Z** Casambi

Finishes

- **71/** _ _ Grey Felt L1 & Grey Felt D1
- **76/** _ _ Grey Felt L1

LED temperature colour

- **/1** _ 2700 K E CRI >90 2388,4 lm 114 lm/W
- **/3** _ 3500 K E CRI >90 2551,3 lm 121,5 lm/W

Control

- **5480** _ _ **/** _ **1** DALI-2
- **5480** _ _ **/** _ **3** 1-10V
- **5480** _ _ **/** _ **4** Triac
- **5480** _ _ **/** _ **5** Push
- **5480** _ _ **/** _ **Z** Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
Wall support: Aluminum.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA

/ _ **1** 110~240V 50/60Hz Bi-volt
/ _ **3** 110~240V 50/60Hz Bi-volt
/ _ **5** 110~240V 50/60Hz Bi-volt

/ _ **4** 220~240V 50/60Hz
/ _ **Z** 220~240V 50/60Hz

Packaging


1 Box 0,46 x 0,46 x 0,4 m
Vol 0,0846 m^3
Gross weight 6,1 Kg Net weight 3,4 Kg

Notes

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP20 CE EAC Bi-volt

5481



Finishes

- **15/** _ _ Grey L2 (NCS S 2500-N)
- **28/** _ _ Brown M1 (NCS S 4020-Y60R)
- **72/** _ _ Grey D1 & Grey L2

LED temperature colour

- **/1** _ 2700 K E
  CRI >90 2871,9 lm 114 lm/W
- **/3** _ 3500 K E
  CRI >90 3067,7 lm 121,7 lm/W

Control

- **5481** _ _ **/** _ **1**
  DALI-2
- **5481** _ _ **/** _ **3**
  1-10V
- **5481** _ _ **/** _ **4**
  Triac
- **5481** _ _ **/** _ **5**
  Push
- **5481** _ _ **/** _ **Z**
  Casambi

Finishes

- **71/** _ _ Grey Felt L1 & Grey Felt D1
- **76/** _ _ Grey Felt L1

LED temperature colour

- **/1** _ 2700 K E
  CRI >90 2871,9 lm 114 lm/W
- **/3** _ 3500 K E
  CRI >90 3067,7 lm 121,7 lm/W

Control

- **5481** _ _ **/** _ **1**
  DALI-2
- **5481** _ _ **/** _ **3**
  1-10V
- **5481** _ _ **/** _ **4**
  Triac
- **5481** _ _ **/** _ **5**
  Push
- **5481** _ _ **/** _ **Z**
  Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
Wall support: Aluminum.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA

/ _ **1** 110~240V 50/60Hz Bi-volt
/ _ **3** 110~240V 50/60Hz Bi-volt
/ _ **5** 110~240V 50/60Hz Bi-volt


/ _ **4** 220~240V 50/60Hz
/ _ **Z** 220~240V 50/60Hz

Packaging

1 Box 0,46 x 0,46 x 0,4 m
Vol 0,0846 m^3
Gross weight 6,1 Kg Net weight 3,4 Kg

LED IP20 EAC Bi-volt

5485



Finishes

72/ _ _ Grey D1 & Grey L2

73/ _ _ Brown M1 & Grey D1)

LED temperature colour

/1 _ 2700 K E
CRI >90 2388,4 lm 114 lm/W

/3 _ 3500 K E
CRI >90 2551,3 lm 121,5 lm/W

Control

5485 _ _ **/** _ **1**
DALI-2

5485 _ _ **/** _ **3**
1-10V

5485 _ _ **/** _ **4**
Triac

5485 _ _ **/** _ **5**
Push

5485 _ _ **/** _ **Z**
Casambi

Finishes

71/ _ _ Grey Felt L1 & Grey Felt D1

LED temperature colour

/1 _ 2700 K E
CRI >90 2388,4 lm 114 lm/W

/3 _ 3500 K E
CRI >90 2551,3 lm 121,5 lm/W

Control

5485 _ _ **/** _ **1**
DALI-2

5485 _ _ **/** _ **3**
1-10V

5485 _ _ **/** _ **4**
Triac

5485 _ _ **/** _ **5**
Push

5485 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
Wall support: Aluminum. Ring: Steel.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA

/ _ **1** 110~240V 50/60Hz Bi-volt
/ _ **3** 110~240V 50/60Hz Bi-volt
/ _ **5** 110~240V 50/60Hz Bi-volt

/ _ **4** 220~240V 50/60Hz
/ _ **Z** 220~240V 50/60Hz


Packaging

1 Box 0,51 x 0,51 x 0,43 m
Vol 0,1118 m^3
Gross weight 8,42 Kg Net weight 4,22 Kg

LED IP20 EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

5486



Finishes

- **72/** _ _ Grey D1 & Grey L2
- **73/** _ _ Brown M1 & Grey D1)

LED temperature colour

- **/1** _ 2700 K E
  CRI >90 2871,9 lm 114 lm/W
- **/3** _ 3500 K E
  CRI >90 3067,7 lm 121,7 lm/W

Control

5486 _ _ **/** _ **1**	DALI-2
5486 _ _ **/** _ **3**	1-10V
5486 _ _ **/** _ **4**	Triac
5486 _ _ **/** _ **5**	Push
5486 _ _ **/** _ **Z**	Casambi

Finishes

- **71/** _ _ Grey Felt L1 & Grey Felt D1

LED temperature colour

- **/1** _ 2700 K E
  CRI >90 2871,9 lm 114 lm/W
- **/3** _ 3500 K E
  CRI >90 3067,7 lm 121,7 lm/W

Control

5486 _ _ **/** _ **1**	DALI-2
5486 _ _ **/** _ **3**	1-10V
5486 _ _ **/** _ **4**	Triac
5486 _ _ **/** _ **5**	Push
5486 _ _ **/** _ **Z**	Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
Wall support: Aluminum. Ring: Steel.

Light Source and electronics

2 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA


/ _ **1** 110~240V 50/60Hz Bi-volt
/ _ **3** 110~240V 50/60Hz Bi-volt
/ _ **5** 110~240V 50/60Hz Bi-volt
/ _ **4** 220~240V 50/60Hz
/ _ **Z** 220~240V 50/60Hz

Packaging

1 Box 0,66 x 0,66 x 0,5 m
Vol 0,2178 m^3
Gross weight 11,35 Kg Net weight 5,45 Kg

LED IP20 CE EAC Bi-volt

5487



Finishes

21/ _ _ Black Grey
(NCS S 7000-N)

73/ _ _ Brown M1
& Grey D1

LED temperature colour

/1 _ 2700 K E
CRI >90 2388,4 lm 114 lm/W

/3 _ 3500 K E
CRI >90 2551,3 lm 121,5 lm/W

Control

5487 _ _ **/** _ **1**
DALI-2

5487 _ _ **/** _ **3**
1-10V

5487 _ _ **/** _ **4**
Triac

5487 _ _ **/** _ **5**
Push

5487 _ _ **/** _ **Z**
Casambi

Finishes

71/ _ _ Grey Felt L1
& Grey Felt D

LED temperature colour

/1 _ 2700 K E
CRI >90 2388,4 lm 114 lm/W

/3 _ 3500 K E
CRI >90 2551,3 lm 121,5 lm/W

Control

5487 _ _ **/** _ **1**
DALI-2

5487 _ _ **/** _ **3**
1-10V

5487 _ _ **/** _ **4**
Triac

5487 _ _ **/** _ **5**
Push

5487 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
Wall support: Aluminum. Ring: Steel.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA

/ _ **1** 110~240V 50/60Hz Bi-volt
/ _ **3** 110~240V 50/60Hz Bi-volt
/ _ **5** 110~240V 50/60Hz Bi-volt


/ _ **4** 220~240V 50/60Hz
/ _ **Z** 220~240V 50/60Hz

Packaging

1 Box 0,66 x 0,66 x 0,5 m
Vol 0,2178 m³
Gross weight 11,52 Kg Net weight 5,62 Kg

LED IP20 EAC Bi-volt

5491



Finishes

- **72/** _ _ Grey D1 & Grey L2
- **73/** _ _ Brown M1 & Grey D1

LED temperature colour

- **/1** _ 2700 K E
  CRI >90 4307,8 lm 114 lm/W
- **/3** _ 3500 K E
  CRI >90 4601,5 lm 121,7 lm/W

Control

- **5491** _ _ **/** _ **1**
  DALI-2
- **5491** _ _ **/** _ **3**
  1-10V
- **5491** _ _ **/** _ **4**
  Triac
- **5491** _ _ **/** _ **5**
  Push
- **5491** _ _ **/** _ **Z**
  Casambi

Finishes

- **71/** _ _ Grey Felt L1 & Grey Felt D1

LED temperature colour

- **/1** _ 2700 K E
  CRI >90 4307,8 lm 114 lm/W
- **/3** _ 3500 K E
  CRI >90 4601,5 lm 121,7 lm/W

Control

- **5491** _ _ **/** _ **1**
  DALI-2
- **5491** _ _ **/** _ **3**
  1-10V
- **5491** _ _ **/** _ **4**
  Triac
- **5491** _ _ **/** _ **5**
  Push
- **5491** _ _ **/** _ **Z**
  Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
Wall support: Aluminum. Ring: Steel.

Light Source and electronics

3 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA

/ _ **1** 110~240V 50/60Hz Bi-volt
/ _ **3** 110~240V 50/60Hz Bi-volt
/ _ **5** 110~240V 50/60Hz Bi-volt

/ _ **4** 220~240V 50/60Hz
/ _ **Z** 220~240V 50/60Hz

Packaging

1 Box 0,66 x 0,66 x 0,67 m
Vol 0,2919 m^3
Gross weight 14,85 Kg Net weight 7,35 Kg

LED IP20 EAC Bi-volt

Mayfair Mini

Design by Diego Fortunato

Mayfair is a modern reimagining of the traditional 19th-century lights, distinguished by its timeless design and sleek silhouette.

Table



Portable

5495




5496



5497

5495



Finishes

- **23** Warm White (NCS S 0502-Y50R)
- **25** Beige D1 (NCS S 4005-Y50R)
- **37** Terra Red (NCS S 4040-Y70R)
- **47** Green L1 (NCS S 6005-G80Y)

LED temperature colour

/1 _ 2700 K E
CRI >90 223 lm 86 lm/W

Control

5495 _ _ / _ **6**
Touch sensor

Materials

Base and shade: Polycarbonate. Diffuser: Translucent polycarbonate. Stem: Stainless steel.

Light Source and electronics

1 x LED PLATE 5V 2,5 W
Constant Voltage 5V
100~240V 50/60Hz

Packaging

1 Box 0,25 x 0,26 x 0,50 m
Vol 0,033 m^3
Gross weight 1,62 Kg Net weight 0,73 Kg

Notes


Rechargeable battery autonomy:
6h at 100% Intensity.
12h at 50% Intensity.
18h at 25% Intensity.

USB-C cable: length 1,20 m
(from the base to the USB charger).

LED IP20 CE EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

5496



Finishes

- **23** Warm White (NCS S 0502-Y50R)
- **25** Beige D1 (NCS S 4005-Y50R)
- **37** Terra Red (NCS S 4040-Y70R)
- **47** Green L1 (NCS S 6005-G80Y)

LED temperature colour

/1 _ 2700 K E
CRI >90 223 lm 86 lm/W

Control

5496 _ _ / _ 6
Touch sensor

Materials

Base and shade: Polycarbonate. Diffuser: Translucent polycarbonate. Stem: Stainless steel.

Light Source and electronics

1 x LED PLATE 5V 2,5 W
Constant Voltage 5V
100~240V 50/60Hz

Packaging


1 Box 0,25 x 0,26 x 0,50 m
Vol 0,033 m³
Gross weight 1,84 Kg Net weight 0,94 Kg

Notes

Cable length: 1 m
(from the base to the USB charger)

LED IP20 CE EAC Bi-volt

5497



Finishes

- **23** Warm White (NCS S 0502-Y50R)
- **25** Beige D1 (NCS S 4005-Y50R)
- **37** Terra Red (NCS S 4040-Y70R)
- **47** Green L1 (NCS S 6005-G80Y)

LED temperature colour

/1 _ 2700 K E
CRI >90 223 lm 86 lm/W

Control

5497 _ _ / _ 0
On/ Off

5497 _ _ / _ 1
DALI

5497 _ _ / _ 3
1-10V

Materials

Base and shade: Polycarbonate. Diffuser: Translucent polycarbonate. Stem: Stainless steel.

Light Source and electronics

1 x LED PLATE 5V 2,5 W
Constant Voltage 5V
100~240V 50/60Hz

Packaging

1 Box 0,25 x 0,26 x 0,50 m
Vol 0,033 m³
Gross weight 1,45 Kg Net weight 0,54 Kg

Notes

Cable length: 1 m. (the cable connects directly to the remote driver)

LED IP20 CE EAC Bi-volt



Mayfair

Design by Diego Fortunato


Mayfair is a modern reimagining of the traditional 19th-century lights, distinguished by its timeless design and sleek silhouette.

Table Floor



5500 **5505** **5510** **5515**

5500



Finishes

07/ _ _ Graphite and green (RAL 7016. RAL 6026)

08/ _ _ Graphite and orange (RAL 7016. RAL 2009)

LED temperature colour

/1 _ 2700 K D
CRI >90 2027,0 lm 135 lm/W

Control

5500 _ _ / _ 6
Optical sensor

Materials

Diffuser: Polycarbonate. Shade: Methacrylate.
Tube: Steel. Base: Zamak.

Light Source and electronics

1 x LED STRIP 24V 2,4 W
1 x LED STRIP 24V 12,6 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,22 x 0,35 x 0,61 m
Vol 0,0470 m³
Gross weight 3,6 Kg Net weight 3,4 Kg

Notes

Touch dimmer on base. Electric cable 2 m.

Ask if you require Push without memory (hotel room type)

LED IP20 EAC


Dimmer Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 | 10 | /1 | A

Model
Finish
LED temperature colour
Control

5505



Finishes

18/ _ _ Graphite (RAL 7016)
93/ _ _ White (RAL 9016)

Finish customization (Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K D
CRI >90 2027,0 lm 135 lm/W

Control

5505 _ _ **/** _ **6**
Optical sensor

Finishes

20/ _ _ Gold
67/ _ _ Copper

LED temperature colour

/1 _ 2700 K D
CRI >90 2027,0 lm 135 lm/W

Control

5505 _ _ **/** _ **6**
Optical sensor

Materials

Diffuser: Polycarbonate. Shade and tube: Steel.
Base: Zamak.

Light Source and electronics

1 x LED STRIP 24V 2,4 W
1 x LED STRIP 24V 12,6 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,22 x 0,35 x 0,61 m
Vol 0,0470 m^3
Gross weight 3,6 Kg Net weight 3,4 Kg

Notes


Touch dimmer on base. Electric cable 2 m

LED □ IP20 CE EAC

Dimmer Bi-volt



5510

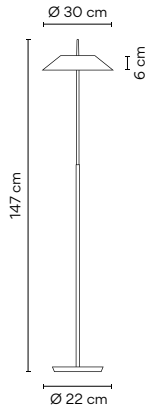

Finishes

07/ _ _ Graphite and green (RAL 7016. RAL 6026)

08/ _ _ Graphite and orange (RAL 7016. RAL 2009)

LED temperature colour

/1 _ 2700 K D
CRI >90 2027,0 lm 135 lm/W

Control

5510 _ _ **/** _ **6**
Optical sensor

Materials

Diffuser: Polycarbonate. Shade: Methacrylate.
Tube: Steel. Base: Zamak.

Light Source and electronics

1 x LED STRIP 24V 2,4 W
1 x LED STRIP 24V 12,6 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging


1 Box 1,50 x 0,32 x 0,34 m
Vol 0,1630 m³
Gross weight 12,8 Kg Net weight 6,2 Kg

Notes

Touch dimmer on shade. Electric cable 2 m

LED IP20 CE EAC
Dimmer Bi-volt

5515

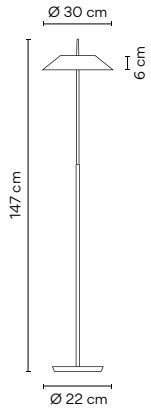

Finishes

18/ _ _ Graphite (RAL 7016)

93/ _ _ White (RAL 9016)

Finish customization (Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K D
CRI >90 2027,0 lm 135 lm/W

Control

5515 _ _ **/** _ **6**
Optical sensor

Finishes

20/ _ _ Gold

67/ _ _ Copper

LED temperature colour

/1 _ 2700 K D
CRI >90 2027,0 lm 135 lm/W

Control

5515 _ _ **/** _ **6**
Optical sensor

Materials

Diffuser: Polycarbonate. Shade and tube: Steel.
Base: Zamak.

Light Source and electronics

1 x LED STRIP 24V 2,4 W
1 x LED STRIP 24V 12,6 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 1,50 x 0,32 x 0,34 m
Vol 0,1630 m³
Gross weight 12,8 Kg Net weight 6,2 Kg

Notes

Touch dimmer on shade. Electric cable 2 m

LED IP20 CE EAC
Dimmer Bi-volt



1160 10 /1A _18

Model
Finish
LED temperature colour
Control
Electrical connection
Only for pendants

Pendants




Ø 30 cm

5520

Ø 30 cm

5525

5520



Finishes

07/ _ _ Graphite and green (RAL 7016. RAL 6026)

08/ _ _ Graphite and orange (RAL 7016. RAL 2009)

LED temperature colour

/1 _ 2700 K D
CRI >90 2027,0 lm 135 lm/W

Control

5520 _ _ **/** _ **1**
DALI

5520 _ _ **/** _ **B**
1-10V, Push

5520 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Shade: Methacrylate.
Tube and canopy: Steel.

Light Source and electronics

1 x LED STRIP 24V 2,4 W
1 x LED STRIP 24V 12,6 W
Constant Voltage 24V
220~240V 50/60Hz

Packaging

1 Box 0,50 x 0,31 x 0,31 m
Vol 0,0500 m³
Gross weight 2,8 Kg Net weight 1,8 Kg

Notes

Extra cable length.

LED IP20 CE EAC

Electrical connection


Surface
_18 Free Wire
_23 Built-in
_31 Remote Micro
for plaster ceilings
_32 Remote XXS
for all types of drop ceilings

1160 | 10 | /1 | A | _18

Model
Finish
LED temperature colour
Control
Electrical connection
Only for pendants



5525



Finishes

- **18/** _ _ Graphite (RAL 7016)
- **93/** _ _ White (RAL 9016)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K D
CRI >90 2027,0 lm 135 lm/W

Control

5525 _ _ **/** _ **1**
DALI

5525 _ _ **/** _ **B**
1-10V, Push

5525 _ _ **/** _ **Z**
Casambi

Finishes

- **20/** _ _ Gold
- **67/** _ _ Copper

LED temperature colour

/1 _ 2700 K D
CRI >90 2027,0 lm 135 lm/W

Control

5525 _ _ **/** _ **1**
DALI

5525 _ _ **/** _ **B**
1-10V, Push

5525 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate.
Shade, tube and canopy: Steel.

Light Source and electronics

1 x LED STRIP 24V 2,4 W
1 x LED STRIP 24V 12,6 W
Constant Voltage 24V
220~240V 50/60Hz

Packaging

1 Box 0,50 x 0,31 x 0,31 m
Vol 0,0500 m^3
Gross weight 2,9 Kg Net weight 1,9 Kg

Notes

Extra cable length.

LED IP20 CE EAC


Electrical connection

Surface
_18 Free Wire
_23 Built-in
_31 Remote Micro
for plaster ceilings
_32 Remote XXS
for all types of drop ceilings


Product specifications subject to change without notice. Please check vibia.com for updated information.

Composing pendants

Next sketches are composed by one or more compositions

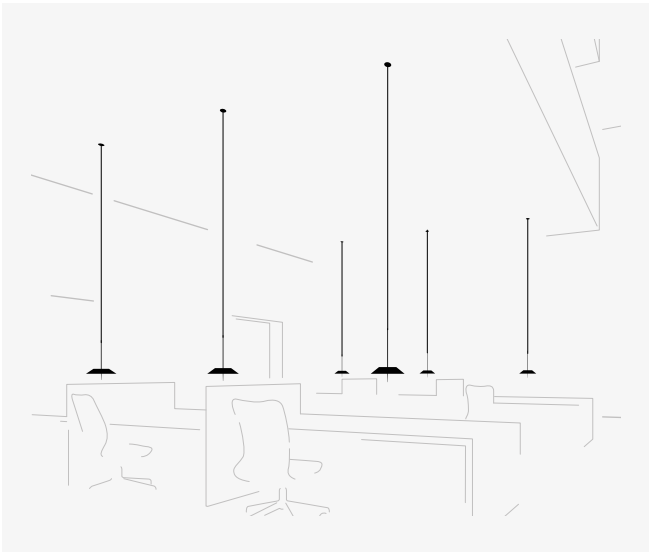

6 x 5520.

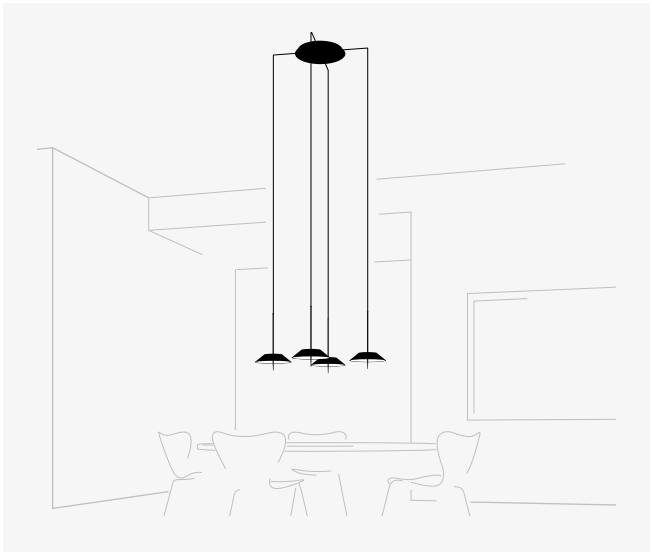

4 x 5525.



4 x 5525.

Each project is unique. Visit vibia.com and chose among multiple compositions designed and adapted to your project needs.

Personalise your own Mayfair composition quick and easy at vibia.com

Electrical connection options for models 5520 / 5525

Choose your preferred installation option accordingto your needs.
For each composition, the optimal minimum number of drivers will be delivered.

Drop ceiling

The innovative remote and built-in fittings accentuate the silkiness and lightness of compositions on suspended ceilings, its great visual grandeur taking center stage.

For Ref. 5520 / 5525

Remote



Micro ø 3 cm
height 7 cm
for plaster ceilings. Black finish.





XXS ø 6 cm
height 6 cm
for all types of drop ceilings. Match with fixture finish.

Built-in



ø 8 cm
height 6 cm
match with fixture finish.







Regular ceiling

When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.


For Ref. 5520 / 5525

Surface




ø 16 cm


match with fixture finish.




Free Wire



ø 20 cm




ø 36 cm



ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendants.





Africa

Design by Francisco Gomez Paz

An object of desire, Africa is a unique gift that combines richness of form and materiality with high performance lighting capabilities. A holistic exploration of beauty, functionality and the essence of humanity.

Table



Portable


5580



Portable

5585

5580



Finishes

- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)

LED temperature colour

/1 _ 2700 K E
CRI >90 520 lm 117 lm/W

Control

5580 _ _ **/** _ **5**
Push

Materials

Body: Aluminium.
Diffuser: Polycarbonate

Light Source and electronics

1 x LED 4,5W 500 mA
Output: DC 5.0 V 2.0 A 10.0W
Input: 100~240V 50/60Hz

Packaging

1 Box 0,08 m x 0,53 m
Vol 0,0026 m^3
Gross weight 1,23 Kg Net weight 0,9 Kg

Notes

Battery capacity 10.000mAh.
Battery voltage 3,7V.
Rechargeable battery autonomy:
6,5h at 100% Intensity.
10h at 66% Intensity.
20h at 33% Intensity.

LED IP20 EAC Bi-volt


Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 | 10 | /1 | A

Model
Finish
LED temperature colour
Control



5585



Finishes

- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)

LED temperature colour

/1 _ 2700 K E
CRI >90 520 lm 117 lm/W

Control

5585 _ _ **/** _ **5**
Push

Materials

Body: Aluminium.
Diffuser: Polycarbonate

Light Source and electronics

1 x LED 4,5W 500 mA
Output: DC 5.0 V 2.0 A 10.0W
Input: 100~240V 50/60Hz

Packaging

1 Box 0,08 m x 0,53 m
Vol 0,0026 m^3
Gross weight 1,23 Kg Net weight 0,9 Kg

Notes

Battery capacity 10.000mAh.
Battery voltage 3,7V.
Rechargeable battery autonomy:
6,5h at 100% Intensity.
10h at 66% Intensity.
20h at 33% Intensity.

LED IP20 EAC Bi-volt

North

Design by Arik Levy

North, south, east and west are our points of references in space; we set-out, build and travel according to these coordinates.

Floor




max. 250 cm x max. 210 cm x max. 355 cm

5600



max. 270 cm x max. 270 cm x max. 355 cm

5605

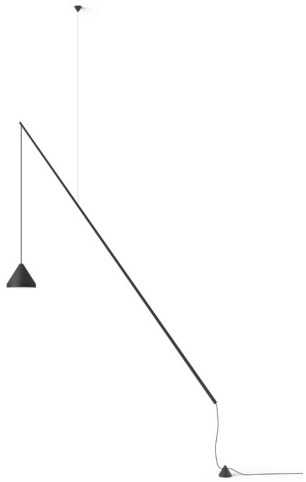

max. 210 cm x max. 310 cm x max. 130 cm

5666



max. 447 cm x max. 325 cm x max. 425 cm


5620



max. 270 cm x max. 270 cm x max. 355 cm

5625

5600



Finishes
- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED temperature colour
/1 _ 2700 K D
CRI >90 2538,0 lm 141 lm/W

Control
5600 _ _ **/** _ **5**
Push

Materials
Rods: Carbon fiber. Shade: Aluminum
Diffuser: Methacrylate. Base: Steel.


Light Source and electronics
2 x LED 9 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
10 Boxes
Total Vol 0,37 m³
Gross weight 92,05 Kg Net weight 79,95 Kg

Notes
Can be connected with or without plug.
Electric cable 2,5 m.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Dimmer

5605



Finishes
- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED temperature colour
/1 _ 2700 K D
CRI >90 2538,0 lm 141 lm/W

Control
5605 _ _ **/** _ **5**
Push

Materials
Rods: Carbon fiber. Shade: Aluminum
Diffuser: Methacrylate. Base: Steel.


Light Source and electronics
2 x LED 9 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
10 Boxes
Total Vol 0,35 m³
Gross weight 91 Kg Net weight 79,8 Kg

Notes
Can be connected with or without plug.
Electric cable 2,5 m

LED IP20 CE EAC Dimmer

5620



Finishes
- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED temperature colour
/1 _ 2700 K D
CRI >90 3807 lm 141 lm/W

Control
5620 _ _ **/** _ **5**
Push

Materials
Rods: Carbon fiber. Shade: Aluminum
Diffuser: Methacrylate. Base: Steel.


Light Source and electronics
3 x LED 9W 350mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
12 Boxes
Total Vol 0,36 m³
Gross weight 94,85 Kg Net weight 81,25 Kg

Notes
Can be connected with or without plug.
Electric cable 2,5 m

LED IP20 CE EAC Dimmer

5625



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED temperature colour

/1 _ 2700 K D
CRI >90 5076 lm 141 lm/W

Control

5625 _ _ **/** _ **5**
Push

Materials

Rods: Carbon fiber. Shade: Aluminum
Diffuser: Methacrylate. Base: Steel.

Light Source and electronics

4 x LED 9W 350mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging

14 Boxes
Total Vol 0,47 m³
Gross weight 101,20 Kg Net weight 83,55 Kg


Notes

Can be connected with or without plug.
Electric cable 2,5 m.

UNTIL STOCK RUNS OUT

LED IP20 EAC Dimmer

5666



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED temperature colour

/1 _ 2700 K D
CRI >90 1269,0 lm 141 lm/W
/2 _ 3000 K D
CRI >80 1123 lm 125 lm/W
/3 _ 3500 K G
CRI >90 1374,9 lm 152,8 lm/W

Control

5666 _ _ **/** _ **5**
Push

Materials

Rods: Carbon fiber. Shade: Aluminum
Diffuser: Methacrylate. Counterweight: Aluminum

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes 0,24 x 0,217 x 0,21 m
Total Vol 0,0464 m³
Gross weight 6,2 Kg Net weight 4,05 Kg

Notes

Electric cable with plug.
Electric cable 2,5 m

Extra cable length.

LED IP20 EAC
Dimmer Bi-volt



Height-adjustable shade.



Adjustable-angle rods. Can be connected with or without plug.

1160 | 10 | /1 | A

Model
Finish
LED temperature colour
Control



Wall



5630



5635



5640




5642



5644

5630



Finishes
- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED temperature colour
- **/1** _ 2700 K D
  CRI >90 1269,0 lm 141 lm/W
- **/2** _ 3000 K D
  CRI >80 1123 lm 125 lm/W
- **/3** _ 3500 K G
  CRI >90 1374,9 lm 152,8 lm/W

Control
5630 _ _ **/** _ **5**
Push

Materials
Rods: Carbon fiber. Shade: Aluminum
Diffuser: Methacrylate. Wall Plate: Steel.


Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
3 Boxes
Total Vol 0,24 m³
Gross weight 11,05 Kg Net weight 5,85 Kg

Notes
Push-button on the wall plate.
Can be connected with or without plug.
Electric cable 2,5 m

LED IP20 CE EAC
Dimmer Bi-volt

5635



Finishes
- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED temperature colour
- **/1** _ 2700 K D
  CRI >90 2538,0 lm 141 lm/W
- **/2** _ 3000 K D
  CRI >80 2246 lm 125 lm/W
- **/3** _ 3500 K G
  CRI >90 2749,8 lm 152,8 lm/W

Control
5635 _ _ **/** _ **5**
Push

Materials
Rods: Carbon fiber. Shade: Aluminum
Diffuser: Methacrylate. Wall Plate: Steel.


Light Source and electronics
2 x LED 9 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
4 Boxes
Total Vol 0,18 m³
Gross weight 14,6 Kg Net weight 7,3 Kg

Notes
Push-button on the wall plate.
Can be connected with or without plug.
Electric cable 2,5 m.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Dimmer

5640



Finishes
- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED temperature colour
- **/1** _ 2700 K D
  CRI >90 1269 lm 141 lm/W

Control
5640 _ _ **/** _ **5**
Push

Materials
Diffuser: Methacrylate. Shade: Aluminum.
Wall Plate: Steel.

Light Source and electronics
1 x LED 9W 350 mA
Constant Current 350 mA
110~240V 50/60Hz


Packaging
2 Boxes
Total Vol 0,04 m³
Gross weight 5,2 Kg Net weight 2,75 Kg

Notes
Push-button on the wall plate.
Can be connected with or without plug.
Electric cable 2,5 m.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC
Dimmer Bi-volt

1160 | 10 | /1 | A
Model | Finish | LED temperature colour | Control

5642



Finishes
- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED temperature colour
/1 _ 2700 K D
CRI >90 1269 lm 141 lm/W

Control
5642 _ _ **/** _ **5**
Push

Materials
Diffuser: Methacrylate. Shade: Aluminum.
Wall Plate: Steel.


Light Source and electronics
1 x LED 9W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,12 m³
Gross weight 7,7 Kg Net weight 3,75 Kg

Notes
Push-button on the wall plate.
Length of light electric cable 10 m.
Can be connected with or without plug.
Electric cable 2,5 m.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC
Dimmer Bi-volt

5644



Finishes
- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED temperature colour
/1 _ 2700 K D
CRI >90 1269 lm 141 lm/W

Control
5644 _ _ **/** _ **5**
Push

Materials
Diffuser: Methacrylate. Shade: Aluminum.
Wall Plate: Steel.

Light Source and electronics
1 x LED 9W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,20 m³
Gross weight 9,15 Kg Net weight 4,45 Kg

Notes
Push-button on the wall plate.
Length of light electric cable 10 m.
Can be connected with or without plug.
Electric cable 2,5 m.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC
Dimmer Bi-volt



Height-adjustable shade.



Can be connected with or without plug.

Product specifications subject to change without notice. Please check vibia.com for updated information.



Pendants



ø 16 cm

5660




ø 40 cm

5662




ø 60 cm

5664

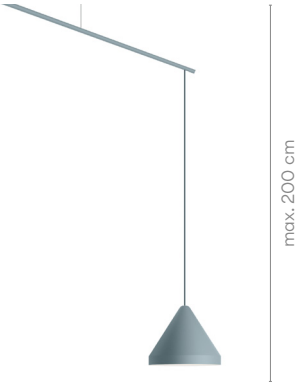

ø 16 cm

5670

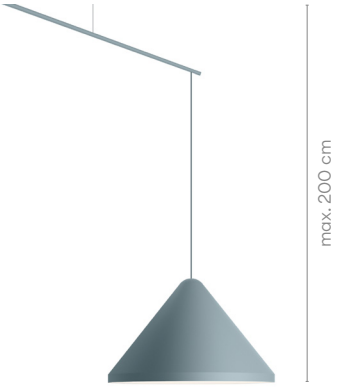

ø 40 cm

5672



ø 60 cm

5674




Height-adjustable shade.

Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 10 /1 A _18

Model
Finish
LED temperature colour
Control
Electrical connection
Only for pendants

5660



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K D
CRI >90 1269,0 lm 141 lm/W

/2 _ 3000 K D
CRI >80 1123 lm 125 lm/W

/3 _ 3500 K G
CRI >90 1374,9 lm 152,8 lm/W

Control

5660 _ _ / _ 1
DALI-2

5660 _ _ / _ B
1-10V, Push

5660 _ _ / _ Z
Casambi

Materials

Shade: Aluminum
Diffuser: Methacrylate. Canopy: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,24 x 0,217 x 0,217 m
Vol 0,01 m³
Gross weight 2,3 Kg Net weight 1,25 Kg

Notes


Extra cable length.

LED IP20 CE EAC Bi-volt

Electrical connection

Surface
_18 Free Wire
_23 Built-in
_31 Remote Micro
for plaster ceilings
_32 Remote XXS
for all types of drop ceilings

5662



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K D
CRI >90 1269,0 lm 141 lm/W

/2 _ 3000 K D
CRI >80 1123 lm 125 lm/W

/3 _ 3500 K G
CRI >90 1374,9 lm 152,8 lm/W

Control

5662 _ _ / _ 1
DALI-2

5662 _ _ / _ B
1-10V, Push

5662 _ _ / _ Z
Casambi

Materials

Shade: Aluminum
Diffuser: Methacrylate. Canopy: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging

1 Box 0,36 x 0,537 x 0,537 m
Vol 0,10 m³
Gross weight 4,8 Kg Net weight 2,25 Kg

Notes


Extra cable length.

LED IP20 CE EAC Bi-volt

Electrical connection

Surface
_18 Free Wire
_23 Built-in
_31 Remote Micro
for plaster ceilings
_32 Remote XXS
for all types of drop ceilings

5664



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K D
CRI >90 1269,0 lm 141 lm/W

/2 _ 3000 K D
CRI >80 1123 lm 125 lm/W

/3 _ 3500 K G
CRI >90 1374,9 lm 152,8 lm/W

Control

5664 _ _ / _ 1
DALI-2

5664 _ _ / _ B
1-10V, Push

5664 _ _ / _ Z
Casambi

Materials

Shade: Aluminum
Diffuser: Methacrylate. Canopy: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,32 x 0,727 x 0,727
Vol 0,17 m³
Gross weight 6,25 Kg Net weight 2,95 Kg

Notes

Extra cable length.


LED IP20 CE EAC Bi-volt

Electrical connection

Surface
_18 Free Wire
_23 Built-in
_31 Remote Micro
for plaster ceilings
_32 Remote XXS
for all types of drop ceilings

1160 | 10 | /1 | A
Model | Finish | LED temperature colour | Control

5670



Finishes
- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED temperature colour
- **/1** _ 2700 K D — CRI >90 1269,0 lm 141 lm/W
- **/2** _ 3000 K D — CRI >80 1123 lm 125 lm/W
- **/3** _ 3500 K G — CRI >90 1374,9 lm 152,8 lm/W

Control
- **5670** _ _ **/** _ **1** — DALI-2
- **5670** _ _ **/** _ **B** — 1-10V, Push
- **5670** _ _ **/** _ **Z** — Casambi

Materials
Rods: Carbon fiber. Shade: Aluminum
Diffuser: Methacrylate. Canopy: Steel.


Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,06 m³
Gross weight 5,75 Kg Net weight 2 Kg

Notes
Extra cable length.

LED | IP20 | CE | EAC | Bi-volt

5672



Finishes
- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED temperature colour
- **/1** _ 2700 K D — CRI >90 1269,0 lm 141 lm/W
- **/2** _ 3000 K D — CRI >80 1123 lm 125 lm/W
- **/3** _ 3500 K G — CRI >90 1374,9 lm 152,8 lm/W

Control
- **5672** _ _ **/** _ **1** — DALI-2
- **5672** _ _ **/** _ **B** — 1-10V, Push
- **5672** _ _ **/** _ **Z** — Casambi

Materials
Rods: Carbon fiber. Shade: Aluminum
Diffuser: Methacrylate. Canopy: Steel.


Light Source and electronics
1 x LED 9W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,14 m³
Gross weight 8,25 Kg Net weight 3 Kg

Notes
Extra cable length.

LED | IP20 | CE | EAC | Bi-volt

5674



Finishes
- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED temperature colour
- **/1** _ 2700 K D — CRI >90 1269,0 lm 141 lm/W
- **/2** _ 3000 K D — CRI >80 1123 lm 125 lm/W
- **/3** _ 3500 K G — CRI >90 1374,9 lm 152,8 lm/W

Control
- **5674** _ _ **/** _ **1** — DALI-2
- **5674** _ _ **/** _ **B** — 1-10V, Push
- **5674** _ _ **/** _ **Z** — Casambi

Materials
Rods: Carbon fiber. Shade: Aluminum
Diffuser: Methacrylate. Canopy: Steel.

Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,21 m³
Gross weight 9,7 Kg Net weight 3,7 Kg


Notes
Extra cable length.

LED | IP20 | CE | EAC | Bi-volt


Product specifications subject to change without notice. Please check vibia.com for updated information.

Composing pendants


Next sketches are composed by one or more compositions

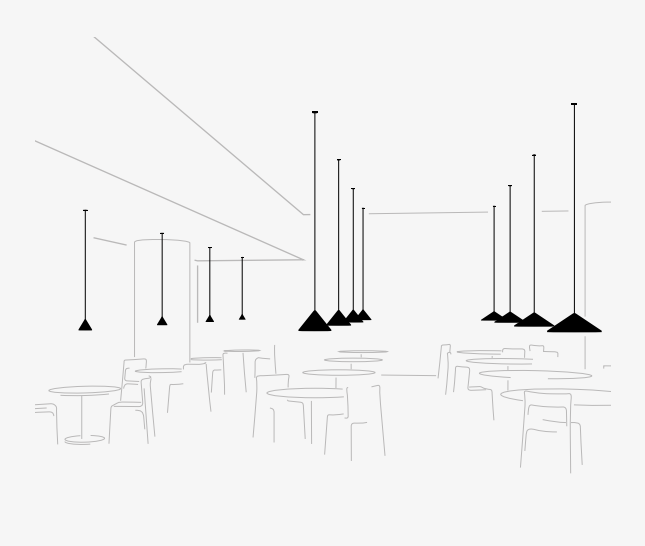

4 x 5660.
4 x 5662.
4 x 5664.

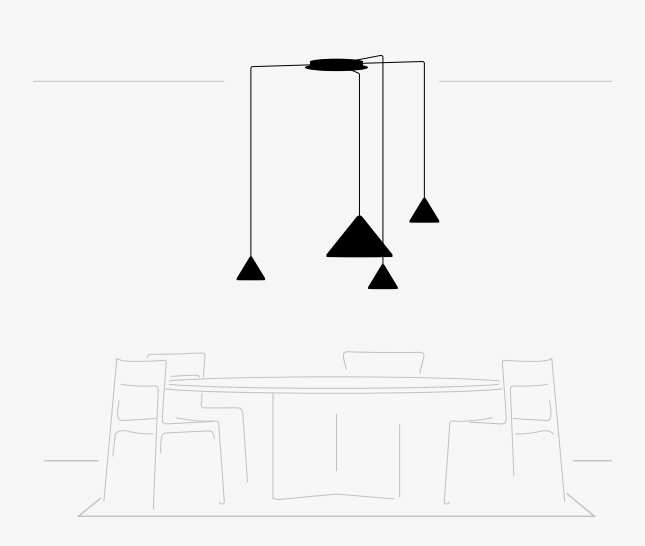

1 x 5664.
3 x 5660.

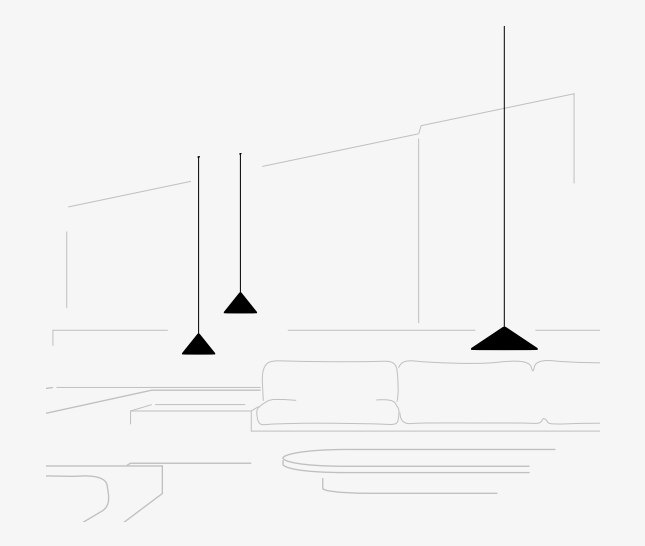

2 x 5662.
1 x 5664.

Each project is unique. Visit vibia.com and chose among multiple compositions designed and adapted to your project needs.

Personalise your own North composition quick and easy at vibia.com

Electrical connection options for models 5660 / 5662 / 5664

Choose your preferred installation option accordingto your needs.
For each composition, the optimal minimum number of drivers will be delivered.

Drop ceiling

The innovative remote and built-in fittings accentuate the silkiness and lightness of compositions on suspended ceilings, its great visual grandeur taking center stage.

For Ref. 5660 / 5662 / 5664

Remote



Micro ø 3 cm
height 7 cm
for plaster ceilings. Black finish.





XXS ø 6 cm
height 6 cm
for all types of drop ceilings. Match with fixture finish.

Built-in



ø 8 cm
height 6 cm
match with fixture finish.







Regular ceiling

When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.

For Ref. 5660 / 5662 / 5664


Surface




ø 18 cm

match with fixture finish.


Free Wire




ø 20 cm



ø 22 cm





ø 36 cm



ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendants.







Tempo

Design by Lievore, Altherr

Timeless character. The Tempo collection by Lievore Altherr reclaims our collective memory of light, making it contemporary through its most essential expression. Shades with an architectonic profile recreate different ambiences bringing them right up-to-date with new additions and uses.

Wall



5756 5757



5758 5759



5760 5761



5762 5763



5764 5765



5766 5767




Ref.
5757, 5759, 5761,5763, 5765, 5767.
Recessed dimmable driver.



Ref.
5756, 5758, 5760, 5762, 5764, 5766.
Push dimmer on the cable.
With plug.

5756



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED temperature colour
/1 _ 2700 K E
CRI >90 415 lm 104 lm/W

Control
5756 _ _ **/** _ **5**
Push

Materials
Diffuser: Blown-glass. LED support: Aluminum.
Structures: Steel. Shade: Aluminum.


Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,082 m³
Gross weight 4,3 Kg Net weight 2,5 Kg

Notes
Push dimmer on the cable. With plug (4 m)

LED IP20 CE EAC Dimmer

5757



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED temperature colour
/1 _ 2700 K E
CRI >90 415 lm 104 lm/W

Control
5757 _ _ **/** _ **1**
DALI-2

5757 _ _ **/** _ **B**
1-10V, Push

5757 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Blown-glass. LED support: Aluminum.
Structures: Steel. Shade: Aluminum.


Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,082 m³
Gross weight 4,3 Kg Net weight 2,5 Kg

Notes
Recessed dimmable driver (2,5 m)

LED IP20 CE EAC ø 7,5 cm

5758



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED temperature colour

/1 _ 2700 K E
CRI >90 415 lm 104 lm/W

Control

5758 _ _ **/** _ **5**
Push

Materials

Diffuser: Blown-glass. LED support: Aluminum.
Structures: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,088 m³
Gross weight 3,5 Kg Net weight 1,7 Kg

Notes

Push dimmer on the cable. With plug (4 m).

LED IP20 CE EAC Dimmer

5759



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED temperature colour

/1 _ 2700 K E
CRI >90 415 lm 104 lm/W

Control

5759 _ _ **/** _ **1**
DALI-2

5759 _ _ **/** _ **B**
1-10V, Push

5759 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Blown-glass. LED support: Aluminum.
Structures: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,088 m³
Gross weight 3,5 Kg Net weight 1,7 Kg

Notes

Recessed dimmable driver (2,5 m)

LED IP20 CE EAC ø 7,5 cm

5760



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED temperature colour

/1 _ 2700 K E
CRI >90 415 lm 104 lm/W

Control

5760 _ _ **/** _ **5**
Push

Materials

Diffuser: Blown-glass. LED support: Aluminum.
Structures: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,088 m³
Gross weight 3,7 Kg Net weight 1,9 Kg

Notes

Push dimmer on the cable. With plug (4 m)

LED IP20 CE EAC Dimmer

5761



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED temperature colour

/1 _ 2700 K E
CRI >90 415 lm 104 lm/W

Control

5761 _ _ **/** _ **1**
DALI-2

5761 _ _ **/** _ **B**
1-10V, Push

5761 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Blown-glass. LED support: Aluminum.
Structures: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,088 m³
Gross weight 3,7 Kg Net weight 1,9 Kg


Notes

Recessed dimmable driver (2,5 m)

LED IP20 CE EAC ø 7,5 cm

Product specifications subject to change without notice. Please check vibia.com for updated information.

5762



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED temperature colour
/1 _ 2700 K E
CRI >90 415 lm 104 lm/W

Control
5762 _ _ **/** _ **5**
Push

Materials
Diffuser: Blown-glass. LED support: Aluminum.
Structures: Steel. Shade: Aluminum


Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,088 m³
Gross weight 3,2 Kg Net weight 2 Kg

Notes
Push dimmer on the cable. With plug (4 m)

LED IP20 CE EAC Dimmer

5763



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED temperature colour
/1 _ 2700 K E
CRI >90 415 lm 104 lm/W

Control
5763 _ _ **/** _ **1**
DALI-2

5763 _ _ **/** _ **B**
1-10V, Push

5763 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Blown-glass. LED support: Aluminum.
Structures: Steel. Shade: Aluminum


Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,088 m³
Gross weight 3,2 Kg Net weight 2 Kg

Notes
Recessed dimmable driver (2,5 m)

LED IP20 CE EAC ø 7,5 cm

5764



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED temperature colour
/1 _ 2700 K E
CRI >90 415 lm 104 lm/W

Control
5764 _ _ **/** _ **5**
Push

Materials
Diffuser: Blown-glass. LED support: Aluminum.
Structures: Steel.


Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,088 m³
Gross weight 2,45 Kg Net weight 1,25 Kg

Notes
Push dimmer on the cable. With plug (4 m)

LED IP20 CE EAC Dimmer

5765



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED temperature colour
/1 _ 2700 K E
CRI >90 415 lm 104 lm/W

Control
5765 _ _ **/** _ **1**
DALI-2

5765 _ _ **/** _ **B**
1-10V, Push

5765 _ _ **/** _ **Z**
Casambi

Materials
Diffuser: Blown-glass. LED support: Aluminum.
Structures: Steel.


Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,088 m³
Gross weight 2,45 Kg Net weight 1,25 Kg

Notes
Recessed dimmable driver (2,5 m)

LED IP20 CE EAC ø 7,5 cm

5766



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED temperature colour

/1 _ 2700 K E
CRI >90 415 lm 104 lm/W

Control

5766 _ _ **/** _ **5**
Push

Materials

Diffuser: Blown-glass. LED support: Aluminum.
Structures: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,088 m³
Gross weight 2,65 Kg Net weight 1,45 Kg

Notes

Push dimmer on the cable. With plug (4 m)

LED IP20 CE EAC Dimmer

5767



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED temperature colour

/1 _ 2700 K E
CRI >90 415 lm 104 lm/W

Control

5767 _ _ **/** _ **1**
DALI-2

5767 _ _ **/** _ **B**
1-10V, Push

5767 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Blown-glass. LED support: Aluminum.
Structures: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,088 m³
Gross weight 2,65 Kg Net weight 1,45 Kg

Notes

Recessed dimmable driver (2,5 cm)

LED IP20 CE EAC ø 7,5 cm



Pendants



ø 25 cm

5770




ø 13 cm

5772



ø 20,5 cm

5774

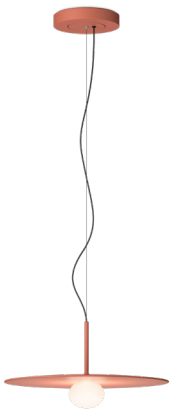


ø 40 cm

5776



ø 24 cm


5778

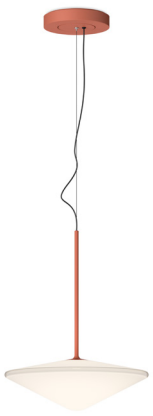

ø 34,5 cm

5780

5770



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED temperature colour

/1 _ 2700 K E
CRI >90 415 lm 104 lm/W

Control

5770 _ _ **/** _ **1**
DALI-2

5770 _ _ **/** _ **B**
1-10V, Push

5770 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Blown-glass. LED support: Aluminum.
Structures: Steel. Shade: Aluminum. Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,28 x 0,26 x 0,13 m
Vol 0,01 m³
Gross weight 2,5 Kg Net weight 2 Kg

Notes


Extra cable length.

LED IP20 CE EAC Bi-volt

Electrical connection

Surface
_18 Free Wire
_23 Built-in
_31 Remote Micro
for plaster ceilings
_32 Remote XXS
for all types of drop ceilings

5772



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED temperature colour

/1 _ 2700 K E
CRI >90 415 lm 104 lm/W

Control

5772 _ _ **/** _ **1**
DALI-2

5772 _ _ **/** _ **B**
1-10V, Push

5772 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Blown-glass. LED support: Aluminum.
Structures: Steel. Shade: Aluminum. Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,28 x 0,2 x 0,27 m
Vol 0,015 m³
Gross weight 1,8 Kg Net weight 1,2 Kg

Notes


Extra cable length.

LED IP20 CE EAC Bi-volt

Electrical connection

Surface
_18 Free Wire
_23 Built-in
_31 Remote Micro
for plaster ceilings
_32 Remote XXS
for all types of drop ceilings

5774



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED temperature colour

/1 _ 2700 K E
CRI >90 415 lm 104 lm/W

Control

5774 _ _ **/** _ **1**
DALI-2

5774 _ _ **/** _ **B**
1-10V, Push

5774 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Blown-glass. LED support: Aluminum.
Structures: Steel. Shade: Aluminum. Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,28 x 0,2 x 0,27 m
Vol 0,015 m³
Gross weight 2 Kg Net weight 1,4 Kg

Notes

Extra cable length.

LED IP20 CE EAC Bi-volt

Electrical connection


Surface
_18 Free Wire
_23 Built-in
_31 Remote Micro
for plaster ceilings
_32 Remote XXS
for all types of drop ceilings

Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 10 /1A _18

Model
Finish
LED temperature colour
Control
Electrical connection
Only for pendants

5776



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED temperature colour

/1 _ 2700 K E
CRI >90 415 lm 104 lm/W

Control

5776 _ _ **/** _ **1**
DALI-2

5776 _ _ **/** _ **B**
1-10V, Push

5776 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Blown-glass. LED support: Aluminum.
Structures: Steel. Shade: Aluminum. Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging


1 Box 0,45 x 0,45 x 0,12 m
Vol 0,023 m³
Gross weight 5,5 Kg Net weight 4 Kg

Notes

Extra cable length.

LED IP20 CE EAC Bi-volt

5778



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED temperature colour

/1 _ 2700 K E
CRI >90 415 lm 104 lm/W

Control

5778 _ _ **/** _ **1**
DALI-2

5778 _ _ **/** _ **B**
1-10V, Push

5778 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Blown-glass. LED support: Aluminum.
Structure: Steel. Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging


1 Box 0,33 x 0,33 x 0,42 m
Vol 0,045 m³
Gross weight 4 Kg Net weight 2,5 Kg

Notes

Extra cable length.

LED IP20 CE EAC Bi-volt

5780



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED temperature colour

/1 _ 2700 K E
CRI >90 415 lm 104 lm/W

Control

5780 _ _ **/** _ **1**
DALI-2

5780 _ _ **/** _ **B**
1-10V, Push

5780 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Blown-glass. LED support: Aluminum.
Structures: Steel. Shade: Aluminum. Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,41 x 0,41 x 0,23 m
Vol 0,038 m³
Gross weight 4 Kg Net weight 2,5 Kg


Notes

Extra cable length.


LED IP20 CE EAC Bi-volt

Composing pendants


Next sketches are composed by one or more compositions

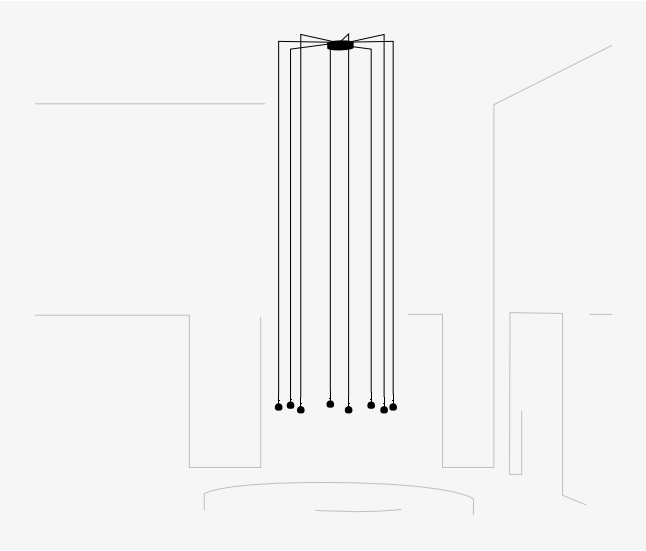

8 x 5772.

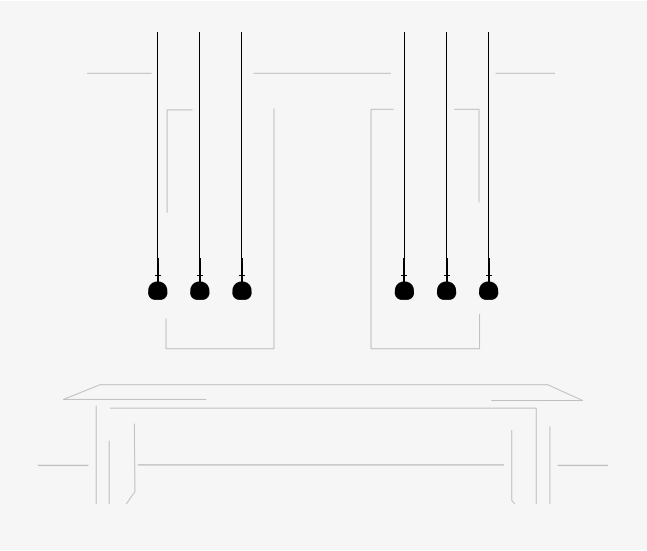

6 x 5772.

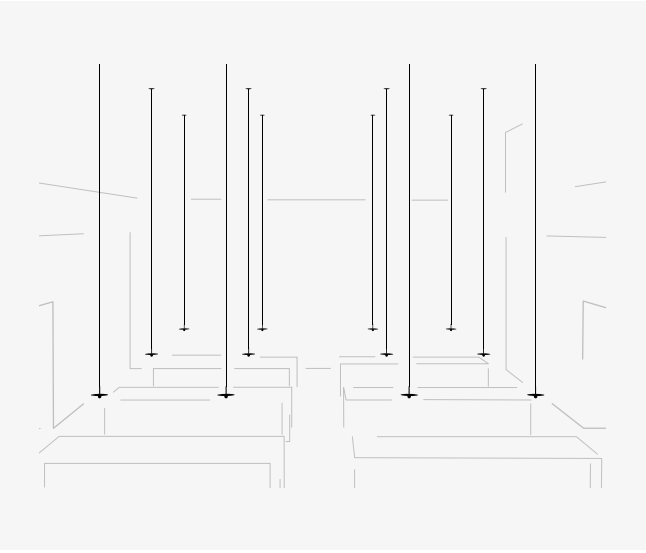

12 x 5770.

Each project is unique. Visit vibia.com and chose among multiple compositions designed and adapted to your project needs.

Personalise your own Tempo composition quick and easy at vibia.com



Electrical connection options for models 5770 / 5772 / 5774

Choose your preferred installation option accordingto your needs.
For each composition, the optimal minimum number of drivers will be delivered.

Drop ceiling

The innovative remote and built-in fittings accentuate the silkiness and lightness of compositions on suspended ceilings, its great visual grandeur taking center stage.

For Ref. 5770 / 5772 / 5774

Remote



Micro ø 3 cm
height 7 cm
for plaster ceilings. Black finish.





XXS ø 6 cm
height 6 cm
for all types of drop ceilings. Match with fixture finish.

Built-in



ø 8 cm
height 6 cm
match with fixture finish.







Regular ceiling

When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.

For Ref. 5770 / 5772 / 5774


Surface




ø 16 cm

match with fixture finish.


Free Wire



ø 20 cm





ø 36 cm



ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendants.







Flat

Design by Ichiro Iwasaki

Flat's distinctive, disc-shaped diffusers form horizontal planes of light that integrate with the surrounding architecture. A study in geometry, the collection creates layers of light that infuse a space with a soothing, Zen sensitivity.

Ceiling



ø 40 cm

5920



ø 55 cm

5915



ø 90 cm

5926



101 x 88 cm

5905



106 x 90 cm

5910



178 x 149 cm


5922



186 x 149 cm

5924

5905



Finishes

10/ _ _ White
(NCS S 0300-N)

71/ _ _ White,
Green L1, Off-white
(NCS S 0300-N,
NCS S 4005-G80Y,
NCS S 1000-N)

LED temperature colour

/1 _ 2700 K E
CRI >90 5906,88 lm 109 lm/W

/3 _ 3500 K F
CRI >90 6344,4 lm 117,5 lm/W

Control

5905 _ _ **/** _ **A**
DALI-2, 1-10V, Push

Materials

Shade: Aluminum. Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum.

Light Source and electronics

4 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging


1 Box 0,75 x 0,45 x 0,25 m
Vol 0,0844 m³
Gross weight 17,15 Kg Net weight 15,38 Kg

Notes

* Electrical connection point

LED IP20 Dimmer

5910



Finishes

10/ _ _ White
(NCS S 0300-N)

72/ _ _ White,
Green L1
(NCS S 0300-N,
NCS S 4005-G80Y)

73/ _ _ White,
Grey L1
(S 0300-N,
NCS S 1000-N)

LED temperature colour

/1 _ 2700 K E
CRI >90 4430,16 lm 109 lm/W

/3 _ 3500 K F
CRI >90 4758,3 lm 117,5 lm/W

Control

5910 _ _ **/** _ **A**
DALI-2, 1-10V, Push

Materials

Shade: Aluminum. Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum.

Light Source and electronics

3 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging


1 Box 0,80 x 0,70 x 0,30 m
Vol 0,1680 m³
Gross weight 11,90 Kg Net weight 9,10 Kg

Notes

* Electrical connection point

LED IP20 Dimmer

5915



Finishes

10/ _ _ White
(NCS S 0300-N)

LED temperature colour

/1 _ 2700 K E
CRI >90 2953,44 lm 109 lm/W

/3 _ 3500 K F
CRI >90 3172,2 lm 117,5 lm/W

Control

5915 _ _ **/** _ **A**
DALI-2, 1-10V, Push

Materials

Shade: Aluminum. Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum.

Light Source and electronics

2 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging


1 Box 0,65 x 0,65 x 0,25 m
Vol 0,0106 m³
Gross weight 6,80 Kg Net weight 4,73 Kg

Notes

* Electrical connection point

LED IP20 Dimmer Bi-volt

5920



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **13/** _ _ Off-White (NCS S 1000-N)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED temperature colour

- **/1** _ 2700 K E
  CRI >90 1740 lm 129 lm/W
- **/3** _ 3500 K E
  CRI >90 1868,9 lm 138,4 lm/W

Control

5920 _ _ **/** _ **1**
DALI-2

5920 _ _ **/** _ **B**
1-10V, Push

Materials

Shade: Aluminum. Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum.

Light Source and electronics

1 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging


1 Box 0,45 x 0,45 x 0,25 m
Vol 0,0051 m³
Gross weight 3,10 Kg Net weight 1,91 Kg

Notes

* Electrical connection point

LED IP20 Dimmer Bi-volt

5922



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **71/** _ _ White, Green L1, Off-white (NCS S 0300-N, NCS S 4005-G80Y, NCS S 1000-N)

LED temperature colour

- **/1** _ 2700 K D
  CRI >90 13920 lm 139 lm/W
- **/3** _ 3500 K D
  CRI >90 14951,1 lm 149,5 lm/W

Control

5922 _ _ **/** _ **A**
DALI-2, 1-10V, Push

5922 _ _ **/** _ **Z**
Casambi

Materials

Shade: Aluminum. Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum.

Light Source and electronics

4 x LED PLATE 25 W 700mA
Constant Current 700 mA
220-240V 50/60Hz

Packaging


1 Box 1,35 x 1,20 x 0,30 m
Vol 0,0486 m³
Gross weight 26,60 Kg Net weight 19,98 Kg

Notes

* Electrical connection point

LED IP20 Dimmer

5924



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **72/** _ _ White, Green L1 (NCS S 0300-N, NCS S 4005-G80Y)
- **73/** _ _ White, Grey L1 (S 0300-N, NCS S 1000-N)

LED temperature colour

- **/1** _ 2700 K D
  CRI >90 9897,27 lm 132 lm/W
- **/3** _ 3500 K E
  CRI >90 10630,4 lm 141,7 lm/W

Control

5924 _ _ **/** _ **A**
DALI-2, 1-10V, Push

5924 _ _ **/** _ **Z**
Casambi

Materials

Shade: Aluminum. Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum.

Light Source and electronics

3 x LED PLATE 25 W 700mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 1,45 x 1,10 x 0,25 m
Vol 0,0399 m³
Gross weight 27 Kg Net weight 20,80 Kg

Notes


* Electrical connection point

LED IP20 Dimmer

1160 | 10 | /1 | A

Model
Finish
LED temperature colour
Control

5926



Finishes

10/ _ _ White
(NCS S 0300-N)

LED temperature colour

/1 _ 2700 K D
CRI >90 6598,18 lm 132 lm/W

/3 _ 3500 K E
CRI >90 7086,9 lm 141,7 lm/W

Control

5926 _ _ **/** _ **A**
DALI-2, 1-10V, Push

Materials

Shade: Aluminum. Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum.

Light Source and electronics

2 x LED PLATE 25 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 1,05 x 1,05 x 0,25 m
Vol 0,0276 m^3
Gross weight 14,60 Kg Net weight 10,08 Kg

Notes

* Electrical connection point

LED IP20 Dimmer



Pendants



5930




5935



5940

5930

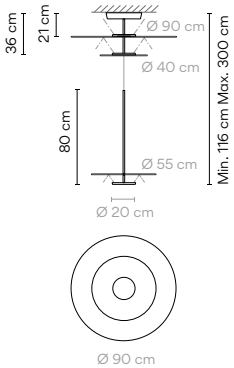

Finishes

- **13/** _ _ Off-White (NCS S 1000-N)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED temperature colour

/1 _ 2700 K D
CRI >90 9897,27 lm 132 lm/W

/3 _ 3500 K E
CRI >90 10630,4 lm 141,7 lm/W

Control

5930 _ _ **/** _ **A**
DALI, 1-10V, Push

5930 _ _ **/** _ **Z**
Casambi

Materials

Shade: Aluminum Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum

Light Source and electronics

3 x LED PLATE 25 W 700mA
Constant Current 700 mA
220-240V 50/60Hz

Packaging

1 Box 0,96x0,96x0,50 m
Vol 0,4608 m³
Gross weight 19 Kg Net weight 10,5 Kg

Notes

Adjust the height on installation


LED IP20 Dimmer

1160 10 /1A _18

Model
Finish
LED temperature colour
Control
Electrical connection
Only for pendants



5935



Finishes

- **13/** _ _ Off-White (NCS S 1000-N)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED temperature colour

/1 _ 2700 K E
CRI >90 1740 lm 129 lm/W

/3 _ 3500 K E
CRI >90 1868,9 lm 138,4 lm/W

Control

5935 _ _ **/** _ **1**
DALI

5935 _ _ **/** _ **B**
1-10V, Push

Materials

Shade: Aluminum Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum

Light Source and electronics

1 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging


1 Box 0,45 x 0,80 x 0,20 m
Vol 0,0072 m³
Gross weight 6,10 Kg Net weight 5 Kg

Notes

Extra cable length.

LED IP20 CE Dimmer Bi-volt

5940



Finishes

- **13/** _ _ Off-White (NCS S 1000-N)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED temperature colour

/1 _ 2700 K E
CRI >90 1740 lm 129 lm/W

/3 _ 3500 K E
CRI >90 1868,9 lm 138,4 lm/W

Control

5940 _ _ **/** _ **1**
DALI

5940 _ _ **/** _ **B**
1-10V, Push

Materials

Shade: Aluminum Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum

Light Source and electronics

1 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,65 x 0,85 x 0,20 m
Vol 0,0111 m³
Gross weight 7 Kg Net weight 6 Kg

Notes

Extra cable length.


LED IP20 CE Dimmer Bi-volt

Electrical connection


Surface
_18 Free Wire
_23 Built-in
_31 Remote Micro
for plaster ceilings
_32 Remote XXS
for all types of drop ceilings

Composing pendants


Next sketches are composed by one or more compositions

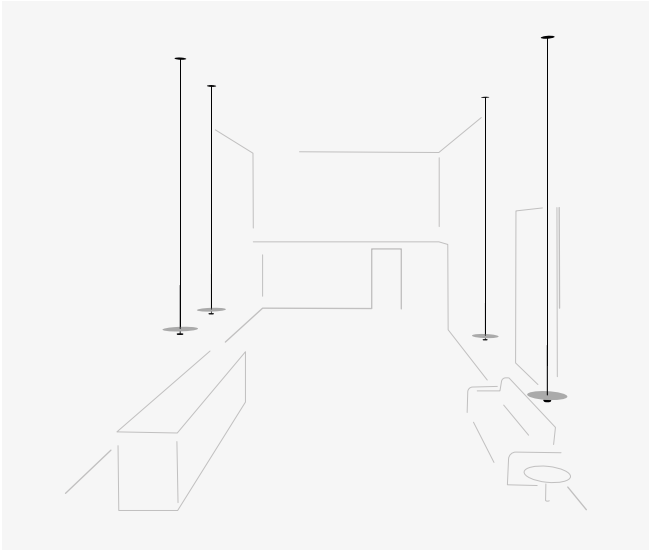


4 x 5935.

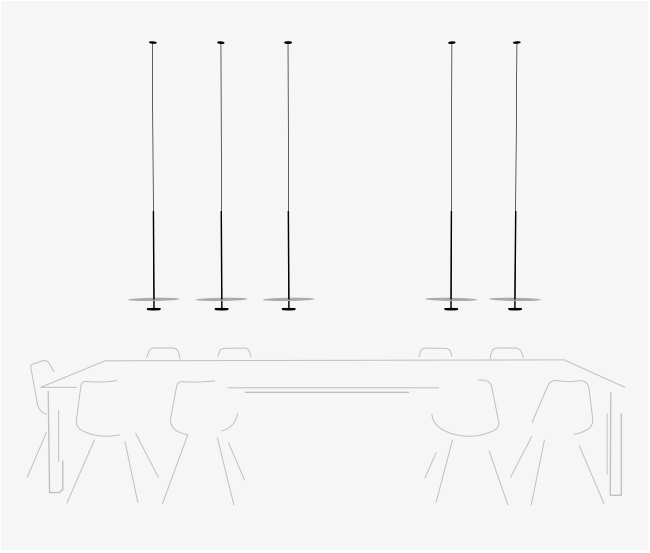


5 x 5935.

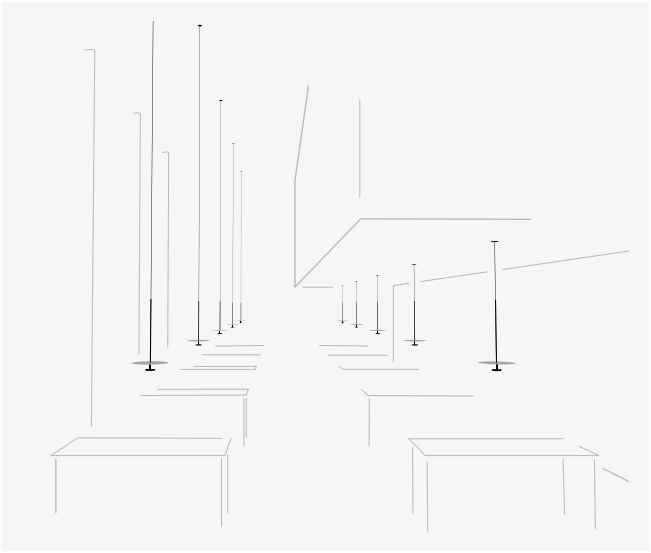


10 x 5935..

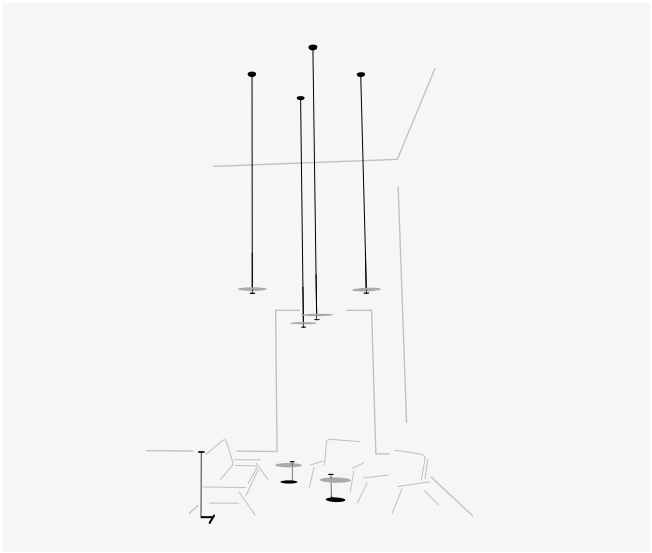

4 x 5935.

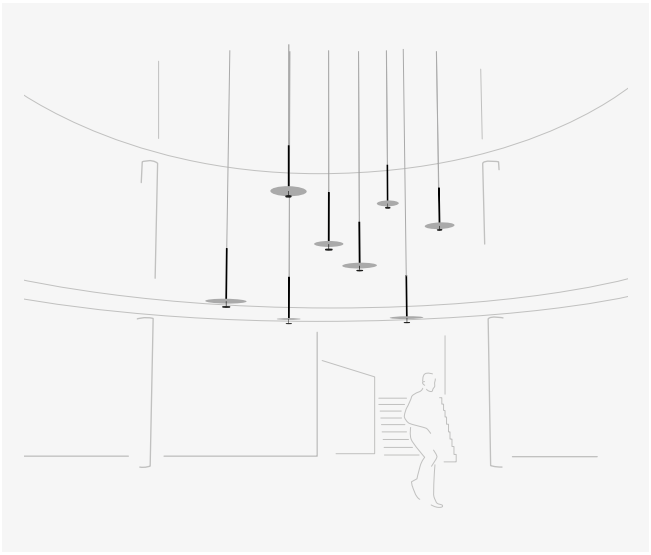

8 x 5935.

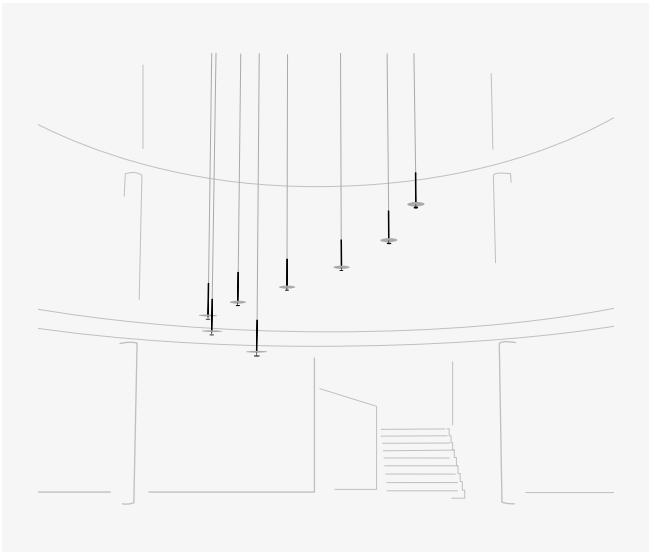

8 x 5935.

Each project is unique. Visit vibia.com and chose among multiple compositions designed and adapted to your project needs.

Personalise your own Flat composition quick and easy at vibia.com

Electrical connection options for model 5935

Choose your preferred installation option accordingto your needs.
For each composition, the optimal minimum number of drivers will be delivered.

Drop ceiling

The innovative remote and built-in fittings accentuate the silkiness and lightness of compositions on suspended ceilings, its great visual grandeur taking center stage.

For Ref. 5935

Remote



Micro ø 3 cm
height 7 cm
for plaster ceilings. Black finish.





XXS ø 6 cm
height 6 cm
for all types of drop ceilings. Match with fixture finish.

Built-in



ø 8 cm
height 6 cm
match with fixture finish.







Regular ceiling

When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.

For Ref. 5935


Surface




ø 16,7 cm

match with fixture finish.


Free Wire




ø 20 cm



ø 22 cm





ø 36 cm



ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendants.








Floor



5945



5950




5955



5957

5945



Finishes

13/ _ _ Off-White
(NCS S 1000-N)

47/ _ _ Green L1
(NCS S 4005-G80Y)

LED temperature colour

/1 _ 2700 K F
CRI >90 1365,8 lm 98 lm/W

/3 _ 3500 K F
CRI >90 1467,0 lm 104,8 lm/W

Control

5945 _ _ / _ **5**
Push

Materials

Shade: Aluminum.
Diffuser: Polycarbonate. Structures: Steel.

Light Source and electronics

2 x LED PLATE 7 W 400 mA
Driver Constant Voltage 24V
110~240V 50/60Hz

Packaging


1 Box 0,65 x 1,00 x 0,25 m
Vol 0,0163 m³
Gross weight 15,85 Kg Net weight 15,25 Kg

Notes

Electric cable 2 m

LED □ IP20 CE Dimmer Bi-volt

5950



Finishes

10/ _ _ White
(NCS S 0300-N)

LED temperature colour

/1 _ 2700 K F
CRI >90 682,9 lm 98 lm/W

/3 _ 3500 K F
CRI >90 733,5 lm 104,8 lm/W

Control

5950 _ _ / _ **5**
Push

Materials

Shade: Aluminum.
Diffuser: Polycarbonate. Structures: Steel.

Light Source and electronics

1 x LED PLATE 7 W 400 mA
Driver Constant Voltage 24V
110~240V 50/60Hz

Packaging

1 Box 0,65 x 0,65 x 0,20 m
Vol 0,0085 m³
Gross weight 14,60 Kg Net weight 12,71 Kg


Notes

Electric cable 2 m

LED □ IP20 CE Dimmer Bi-volt



5955



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED temperature colour
- **/1** _ 2700 K F
  CRI >90 682,9 lm 98 lm/W
- **/3** _ 3500 K F
  CRI >90 733,5 lm 104,8 lm/W

Control
5955 _ _ / _ **5**
Push

Materials
Shade: Aluminum.
Diffuser: Polycarbonate. Structures: Steel.


Light Source and electronics
1 x LED PLATE 7 W 400 mA
Driver Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,30 x 1,10 x 0,10 m
Vol 0,0033 m³
Gross weight 4,80 Kg Net weight 3,50 Kg

Notes
Electric cable 2 m

LED | IP20 | Dimmer | Bi-volt

5957



Finishes
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED temperature colour
- **/1** _ 2700 K F
  CRI >90 682,9 lm 98 lm/W
- **/3** _ 3500 K F
  CRI >90 733,5 lm 104,8 lm/W

Control
5957 _ _ / _ **5**
Push

Materials
Shade: Aluminum.
Diffuser: Polycarbonate. Structures: Steel.

Light Source and electronics
1 x LED PLATE 7 W 400 mA
Constant Voltage 24V
110~240V 50/60Hz


Packaging
1 Box 0,40 x 1,10 x 0,10 m
Vol 0,0044 m³
Gross weight 6,10 Kg Net weight 4,46 Kg

Notes
Electric cable 2 m

LED | IP20 | Dimmer | Bi-volt

1160 | 10 | /1 | A
Model | Finish | LED temperature colour | Control

Table

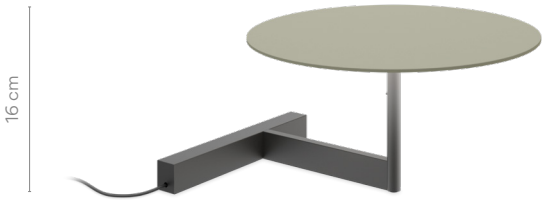


5965



5970

5965



Finishes
- **13/** _ _ Off-White (NCS S 1000-N)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED temperature colour
/1 _ 2700 K F
CRI >90 682,9 lm 98 lm/W

Control
5965 _ _ **/** _ **5**
Push

Materials
Shade: Aluminum.
Diffuser: Polycarbonate. Structures: Steel.


Light Source and electronics
1 x LED PLATE 7W 400mA
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,50 x 0,50 x 0,7 m
Vol 0,0018 m³
Gross weight 4 Kg Net weight 3,11 Kg

Notes
Electric cable 2 m

LED | IP20 | Dimmer | Bi-volt

5970



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED temperature colour
/1 _ 2700 K F
CRI >90 682,9 lm 98 lm/W

Control
5970 _ _ **/** _ **5**
Push

Materials
Shade: Aluminum.
Diffuser: Polycarbonate. Structures: Steel.

Light Source and electronics
1 x LED PLATE 7W 400mA
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,20 x 0,40 x 0,07 m
Vol 0,0072 m³
Gross weight 4 Kg Net weight 3,11 Kg

Notes
Electric cable 2 m

LED | IP20 | Dimmer | Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.


DIALOGUES

Spa

Design by Ramos & Bassols

Spa is the perfect lighting solution for any wellness space. From public dressing rooms, restaurants and spas, to private kitchens, corridors and bathrooms, its graceful simplicity allows for easy cleaning and seamless integration within the surrounding architecture of a variety of interiors.

Ceiling Wall



5975




5977




5979




5981




5983

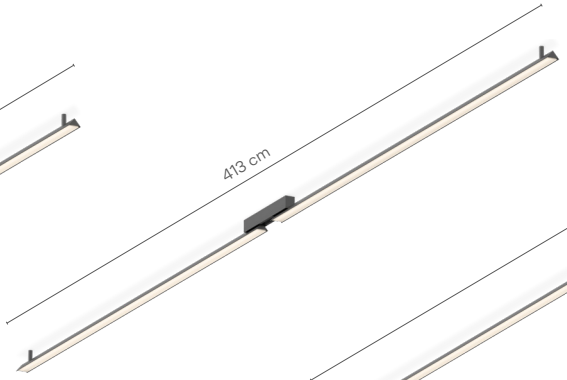


5985

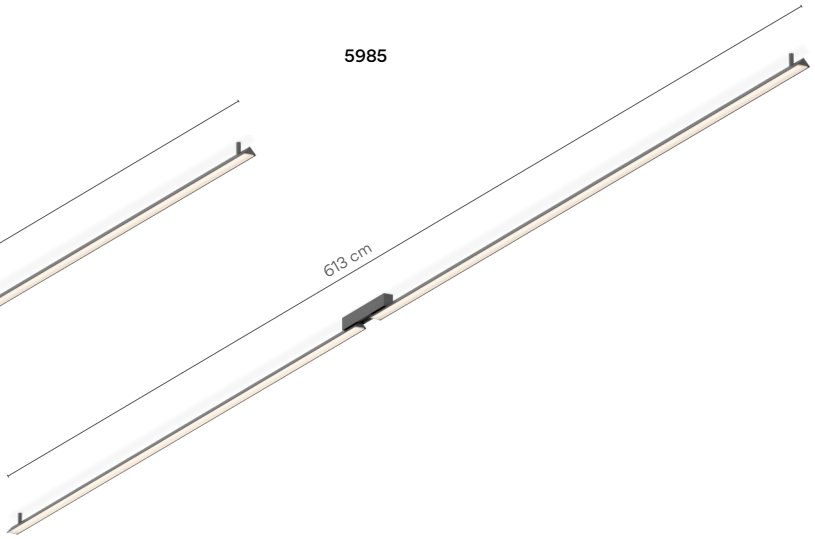

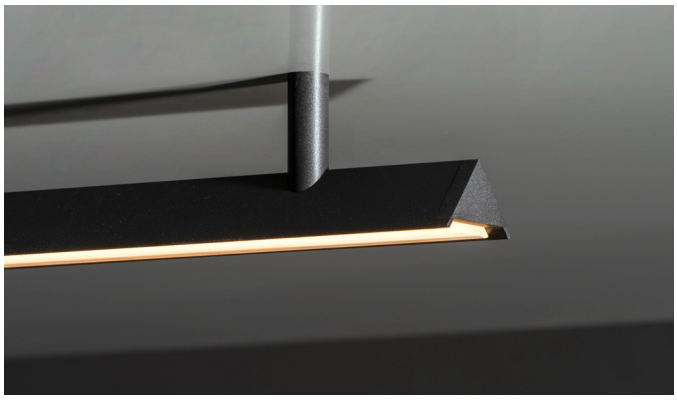



5975



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED temperature colour

- **/1** _ 2700 K E
  CRI >90 1560 lm 144 lm/W
- **/3** _ 3500 K E
  CRI >90 1290 lm 178 lm/W

Control

5975 _ _ **/** _ **1**
DALI

5975 _ _ **/** _ **3**
1-10V

5975 _ _ **/** _ **Z** _ **30**
Casambi (Remote)

Materials

Profile: Aluminum. Difuser: PMMA & Silicone.
Canopy: Aluminum.

Light Source and electronics


1 x LED STRIP 10,8 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging

1 Box 1,5 x 0,1 x 0,1 m
Vol 0,015 m³
Gross weight 3,1 Kg Net weight 1,6 Kg

LED IP44 CE EAC Dimmer

5977



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED temperature colour

- **/1** _ 2700 K E
  CRI >90 2560 lm 119 lm/W
- **/3** _ 3500 K E
  CRI >90 3360 lm 156 lm/W

Control

5977 _ _ **/** _ **1**
DALI

5977 _ _ **/** _ **3**
1-10V

5977 _ _ **/** _ **Z** _ **30**
Casambi (Remote)

Materials

Profile: Aluminum. Difuser: PMMA & Silicone.
Canopy: Aluminum.

Light Source and electronics


1 x LED STRIP 21,6 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging

1 Box 2,3 x 0,1 x 0,1 m
Vol 0,023 m³
Gross weight 4,9 Kg Net weight 2,6

LED IP44 CE EAC Dimmer

5979



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED temperature colour

/1 _ 2700 K E
CRI >90 3840 lm 119 lm/W

/3 _ 3500 K E
CRI >90 5040 lm 156 lm/W

Control

5979 _ _ **/** _ **1**
DALI

5979 _ _ **/** _ **3**
1-10V

5979 _ _ **/** _ **Z** _ **30**
Casambi (Remote)

Materials

Profile: Aluminum. Difuser: PMMA & Silicone.
Canopy: Aluminum.

Light Source and electronics


1 x LED STRIP 32,4 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging

1 Box 3,3 x 0,1 x 0,1 m
Vol 0,033 m³
Gross weight 6,9 Kg Net weight 3,6 Kg

LED IP44 CE EAC Dimmer

5981



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED temperature colour

/1 _ 2700 K E
CRI >90 3120 lm 144 lm/W

/3 _ 3500 K E
CRI >90 3840 lm 178 lm/W

Control

5981 _ _ **/** _ **1**
DALI

5981 _ _ **/** _ **3**
1-10V

5981 _ _ **/** _ **Z** _ **30**
Casambi (Remote)

Materials

Profile: Aluminum. Difuser: PMMA & Silicone.
Canopy: Aluminum.

Light Source and electronics


2 x LED STRIP 10,8 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,030 m³
Gross weight 5,8 Kg Net weight 2,8 Kg

LED IP44 CE Dimmer

5983



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED temperature colour

/1 _ 2700 K E
CRI >90 5120 lm 119 lm/W

/3 _ 3500 K E
CRI >90 6720 lm 156 lm/W

Control

5983 _ _ **/** _ **1**
DALI

5983 _ _ **/** _ **3**
1-10V

5983 _ _ **/** _ **Z** _ **30**
Casambi (Remote)

Materials

Profile: Aluminum. Difuser: PMMA & Silicone.
Canopy: Aluminum.

Light Source and electronics


2 x LED STRIP 21,6 W 600 mA
Constant Current 1200 mA
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,046 m³
Gross weight 9,4 Kg Net weight 4,8 Kg

LED IP44 CE Dimmer

5985



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED temperature colour

/1 _ 2700 K E
CRI >90 7680 lm 119 lm/W

/3 _ 3500 K E
CRI >90 10080 lm 156 lm/W

Control

5985 _ _ / _ 1
DALI (Remote)

5985 _ _ / _ 3
1-10V (Remote)

5985 _ _ / _ Z
Casambi (Remote)

Materials

Profile: Aluminum. Difuser: PMMA & Silicone.
Canopy: Aluminum.

Light Source and electronics


2 x LED STRIP 32,4 W 600 mA
Constant Current 600 mA Remote
220~240V 50/60Hz


Packaging

2 Boxes
Total Vol 0,066 m³
Gross weight 13,5 Kg Net weight 6,9 Kg


LED IP44 Dimmer

Wall Vanity light






5987

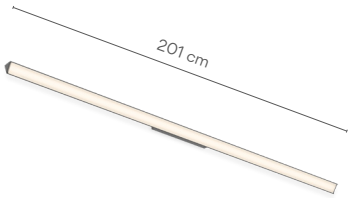

5989

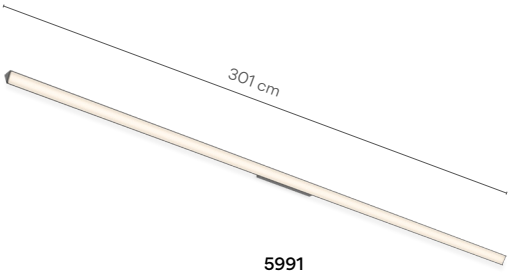


5991





5987



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED temperature colour

/1 _ 2700 K E
CRI >90 1560 lm 144 lm/W

/3 _ 3500 K E
CRI >90 1920 lm 178 lm/W

Control

5987 _ _ **/** _ **1**
DALI

5985 _ _ **/** _ **3**
1-10V

5985 _ _ **/** _ **Z**
Casambi (Remote)

Materials

Profile: Aluminum. Difuser: PMMA & Silicone.
Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 10,8 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging


1 Box 1,5 x 0,1 x 0,1 m
Vol 0,015 m³
Gross weight 3,1 Kg Net weight 1,6 Kg

Notes

Central canopy with module
LED inclined 30°

LED IP44 Dimmer

5989



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED temperature colour

/1 _ 2700 K E
CRI >90 2560 lm 119 lm/W

/3 _ 3500 K E
CRI >90 3360 lm 156 lm/W

Control

5989 _ _ **/** _ **1**
DALI

5989 _ _ **/** _ **3**
1-10V

5989 _ _ **/** _ **Z**
Casambi (Remote)

Materials

Profile: Aluminum. Difuser: PMMA & Silicone.
Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 21,6 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging


1 Box 2,3 x 0,1 x 0,1 m
Vol 0,023 m³
Gross weight 4,9 Kg Net weight 2,6 Kg

Notes

Central canopy with module
LED inclined 30°

LED IP44 Dimmer

5991



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED temperature colour

/1 _ 2700 K E
CRI >90 3840 lm 119 lm/W

/3 _ 3500 K E
CRI >90 5040 lm 156 lm/W

Control

5991 _ _ **/** _ **1**
DALI

5991 _ _ **/** _ **3**
1-10V

5991 _ _ **/** _ **Z**
Casambi (Remote)

Materials

Profile: Aluminum. Difuser: PMMA & Silicone.
Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 32,4 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging

1 Box 3,3 x 0,1 x 0,1 m
Vol 0,033 m³
Gross weight 6,9 Kg Net weight 3,6 Kg


Notes

Central canopy with module
LED inclined 30°

LED IP44 Dimmer


Vertical Wall



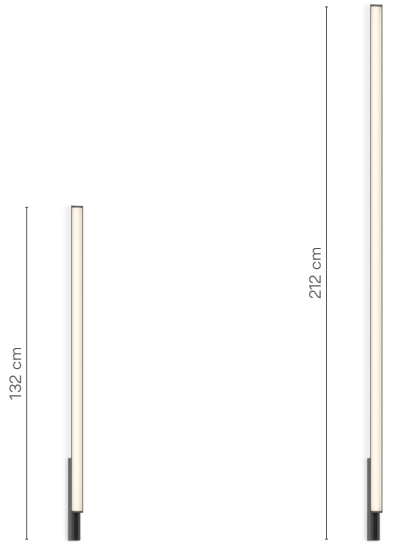

5993 5995

5993



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED temperature colour

/1 _ 2700 K E
CRI >90 1560 lm 144 lm/W

/3 _ 3500 K E
CRI >90 1920 lm 178 lm/W

Control

5993 _ _ **/** _ **1**
DALI

5993 _ _ **/** _ **3**
1-10V

5993 _ _ **/** _ **Z**
Casambi (Remote)

Materials

Profile: Aluminum. Difuser: PMMA & Silicone.
Canopy: Aluminum.

Light Source and electronics


1 x LED STRIP 10,8W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging

1 Box 1,5 x 0,1 x 0,1 m
Vol 0,015 m³
Gross weight 3,1 Kg Net weight 1,6 Kg

LED IP44 Dimmer

5995



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED temperature colour

/1 _ 2700 K E
CRI >90 2560 lm 119 lm/W

/3 _ 3500 K E
CRI >90 3360 lm 156 lm/W

Control

5995 _ _ **/** _ **1**
DALI

5995 _ _ **/** _ **3**
1-10V

5995 _ _ **/** _ **Z**
Casambi (Remote)

Materials

Profile: Aluminum. Difuser: PMMA & Silicone.
Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 21,6 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging

1 Box 2,3 x 0,1 x 0,1 m
Vol 0,023 m³
Gross weight 4,9 Kg Net weight 2,6 Kg


LED IP44 Dimmer

Suite

Design by Jordi Vilardell & Meritxell Vidal

Reinterprets and updates the traditional combination of side table or shelf with table lamp. Its warm and comfortable lighting effect appears when least expected, a pleasant luminous surprise.

Floor Table

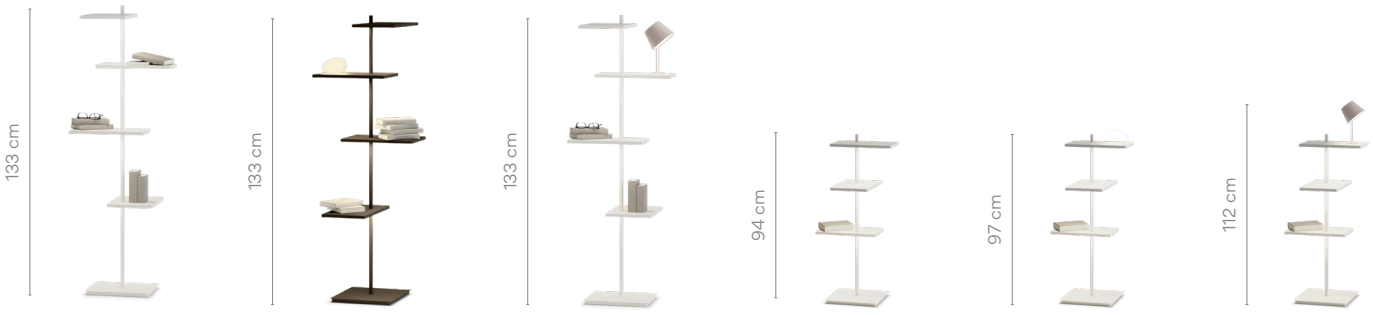


6005 **6006** **6007** **6010** **6011** **6012**



6025 **6026** **6027** **6030** **6031** **6032**

6005



Finishes

14/ _ _ Chocolate
(RAL 8019)

93/ _ _ White
(RAL 9016)

Finish customization
(Available options:
Vibia colour palette)

LED temperature colour

/1 _ 2700 K F
CRI >90 1054,6 lm 78 lm/W

Control

6005 _ _ / _ 0
On/ Off

Materials

Shelf: Aluminum. Diffuser: Polycarbonate.
Vertical tube: Steel. Base: Steel. Lid: ABS with fiberglass.

Light Source and electronics

8 x LED STRIP 24V 1,63 W
Constant Voltage 24V
220~240V 50Hz

Packaging

1 Box 0,730 x 0,535 x 1,385 m
Vol 0,4513 m^3
Gross weight 34,1 Kg Net weight 16,5 Kg

Notes


USB charging connection.
LED on/off switch under the shelf.
Electric cable 2,5 m.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC

Product specifications subject to change without notice. Please check vibia.com for updated information.

6006



Finishes
- **14/** _ _ Chocolate (RAL 8019)
- **93/** _ _ White (RAL 9016)

Finish customization (Available options: Vibia colour palette)

LED temperature colour
/1 _ 2700 K F
CRI >90 1539,64 lm 88 lm/W

Control
6006 _ _ **/** _ **5**
Push

Materials
Shelf: Aluminum. Diffuser: Polycarbonate.
Vertical tube: Steel. Base: Steel. Lid: ABS with fiberglass.


Light Source and electronics
8 x LED STRIP 24V 1,63 W.
1 x LED 4,5 W 350 mA
Constant Current / Constant Voltage 350 24V
220~240V 50Hz

Packaging
1 Box 0,730 x 0,535 x 1,385 m
Vol 0,4513 m³
Gross weight 34,3 Kg Net weight 16,7 Kg

Notes
Glass diffuser mounted on shelf with dimmable light.
USB charging connection.
LED on/off switch under the shelf.
Electric cable 2,5 m.

LED IP20 EAC Dimmer

6007



Finishes
- **14/** _ _ Chocolate (RAL 8019)
- **93/** _ _ White (RAL 9016)

Finish customization (Available options: Vibia colour palette)

LED temperature colour
/1 _ 2700 K F
CRI >90 1539,64 lm 88 lm/W

Control
6007 _ _ **/** _ **5**
Push

Materials
Shelf: Aluminum. Diffuser: Polycarbonate.
Vertical tube: Steel. Base: Steel. Lid: ABS with fiberglass.


Light Source and electronics
8 x LED STRIP 24V 1,63 W.
1 x LED 4,5 W 350 mA
Constant Current / Constant Voltage 350 24V
220~240V 50Hz

Packaging
1 Box 0,730 x 0,535 x 1,385 m
Vol 0,4513 m³
Gross weight 34,3 Kg Net weight 17 Kg

Notes
Reading light mink (Pantone 407C), mounted on shelf with dimmable light.
USB charging connection.
LED on/off switch under the shelf.
Electric cable 2,5 m.

LED IP20 EAC Dimmer

6010



Finishes
- **14/** _ _ Chocolate (RAL 8019)
- **93/** _ _ White (RAL 9016)

Finish customization (Available options: Vibia colour palette)

LED temperature colour
/1 _ 2700 K F
CRI >90 791 lm 77 lm/W

Control
6010 _ _ **/** _ **0**
On/ Off

Materials
Shelf: Aluminum. Diffuser: Polycarbonate.
Vertical tube: Steel. Base: Steel. Lid: ABS with fiberglass.


Light Source and electronics
6 x LED STRIP 24V 1,63 W
Constant Voltage 24V
220~240V 50Hz

Packaging
1 Box 0,45 x 0,80 x 0,20 m
Vol 0,0072 m³
Gross weight 16,10 Kg Net weight 16,10 Kg

Notes
USB charging connection.
LED on/off switch under the shelf.
Electric cable 2,5 m.
UNTIL STOCK RUNS OUT

LED IP20 EAC

6011



Finishes
- **14/** _ _ Chocolate (RAL 8019)
- **93/** _ _ White (RAL 9016)

Finish customization
(Available options:
Vibia colour palette)

LED temperature colour
/1 _ 2700 K F
CRI >90 790,98 lm 55 lm/W

Control
6011 _ _ **/** _ **5**
Push

Materials
Shelf: Aluminum. Diffuser: Polycarbonate.
Vertical tube: Steel. Base: Steel. Lid: ABS with fiberglass.


Light Source and electronics
6 x LED STRIP 24V 1,63 W.
1 x LED 4,5 W 350 mA
Constant Current / Constant Voltage 350 24V
220~240V 50Hz

Packaging
1 Box 0,730 x 0,535 x 1,385 m
Vol 0,3623 m³
Gross weight 32,4 Kg Net weight 15,7 Kg

Notes
Glass diffuser mounted on shelf
with dimmable light.
USB charging connection.
LED on/off switch under the shelf.
Electric cable 2,5 m

LED IP20 EAC Dimmer

6012



Finishes
- **14/** _ _ Chocolate (RAL 8019)
- **93/** _ _ White (RAL 9016)

Finish customization
(Available options:
Vibia colour palette)

LED temperature colour
/1 _ 2700 K F
CRI >90 1275,98 lm 89 lm/W

Control
6012 _ _ **/** _ **5**
Push

Materials
Shelf: Aluminum. Diffuser: Polycarbonate.
Vertical tube: Steel. Base: Steel. Lid: ABS with fiberglass.


Light Source and electronics
6 x LED STRIP 24V 1,63 W.
1 x LED 4,5 W 350 mA
Constant Current / Constant Voltage 350 24V
220~240V 50Hz

Packaging
1 Box 0,730 x 0,535 x 1,385 m
Vol 0,3623 m³
Gross weight 33,6 Kg Net weight 16 Kg

Notes
Reading light mink (Pantone 407C),
mounted on shelf with dimmable light.
USB charging connection.
LED on/off switch under the shelf.
Electric cable 2,5 m

LED IP20 EAC Dimmer

6025



Finishes
- **14/** _ _ Chocolate (RAL 8019)
- **93/** _ _ White (RAL 9016)

Finish customization
(Available options:
Vibia colour palette)

LED temperature colour
/1 _ 2700 K F
CRI >90 1054,6 lm 78 lm/W

Control
6025 _ _ **/** _ **0**
On/ Off

Materials
Shelf: Aluminum. Diffuser: Polycarbonate.
Vertical tube: Steel. Lid: ABS with fiberglass.


Light Source and electronics
8 x LED STRIP 24V 1,63W
Constant Voltage 24V
220~240V 50Hz

Packaging
1 Box 0,61 x 0,54 x 1,1 m
Vol 0,3623 m³
Gross weight 11 Kg Net weight 5,6 Kg

Notes
USB charging connection.
LED on/off switch under the shelf.
Electric cable 2,5 m.
UNTIL STOCK RUNS OUT

LED IP20 EAC

6026



Finishes
14/ _ _ Chocolate
(RAL 8019)
93/ _ _ White
(RAL 9016)
Finish customization
(Available options:
Vibia colour palette)

LED temperature colour
/1 _ 2700 K F
CRI >90 1539,6 lm 88 lm/W

Control
6026 _ _ **/** _ **5**
Push

Materials
Shelf: Aluminum. Diffuser: Polycarbonate.
Vertical tube: Steel. Lid: ABS with fiberglass.


Light Source and electronics
8 x LED STRIP 24V 1,63 W.
1 x LED 4,5 W 350 mA
Constant Current / Constant Voltage 350 24V
220~240V 50Hz

Packaging
1 Box 0,61 x 0,54 x 1,1 m
Vol 0,3623 m³
Gross weight 11,2 Kg Net weight 5,8 Kg

Notes
Glass diffuser mounted
on shelf with dimmable light.
USB charging connection.
LED on/off switch under the shelf.
Electric cable 2,5 m.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Dimmer

6027



Finishes
14/ _ _ Chocolate
(RAL 8019)
93/ _ _ White
(RAL 9016)
Finish customization
(Available options:
Vibia colour palette)

LED temperature colour
/1 _ 2700 K F
CRI >90 1539,6 lm 88 lm/W

Control
6027 _ _ **/** _ **5**
Push

Materials
Shelf: Aluminum. Diffuser: Polycarbonate.
Vertical tube: Steel. Lid: ABS with fiberglass.


Light Source and electronics
8 x LED STRIP 24V 1,63 W.
1 x LED 4,5 W 350 mA
Constant Current / Constant Voltage 350 24V
220~240V 50Hz

Packaging
1 Box 0,61 x 0,54 x 1,1 m
Vol 0,4513 m³
Gross weight 12,4 Kg Net weight 6,1 Kg

Notes
Reading light mink (Pantone 407C),
mounted on shelf with dimmable light.
USB charging connection.
LED on/off switch under the shelf.
Electric cable 2,5 m.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Dimmer

6030



Finishes
14/ _ _ Chocolate
(RAL 8019)
93/ _ _ White
(RAL 9016)
Finish customization
(Available options:
Vibia colour palette)

LED temperature colour
/1 _ 2700 K F
CRI >90 791,0 lm 77 lm/W

Control
6030 _ _ **/** _ **0**
On/ Off

Materials
Shelf: Aluminum. Diffuser: Polycarbonate.
Vertical tube: Steel. Lid: ABS with fiberglass.


Light Source and electronics
6 x LED STRIP 24V 1,63 W
Constant Voltage 24V
220~240V 50Hz

Packaging
1 Box 0,61 x 0,54 x 1,1 m
Vol 0,3623 m³
Gross weight 9,8 Kg Net weight 4,4 Kg

Notes
USB charging connection.
LED on/off switch under the shelf.
Electric cable 2,5 m.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC

6031



Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **93/** _ _ White (RAL 9016)

Finish customization
(Available options:
Vibia colour palette)

LED temperature colour

/1 _ 2700 K F
CRI >90 791,0 lm 55 lm/W

Control

6031 _ _ **/** _ **5**
Push

Materials

Shelf: Aluminum. Diffuser: Polycarbonate.
Vertical tube: Steel. Lid: ABS with fiberglass

Light Source and electronics

6 x LED STRIP 24V 1,63 W.
1 x LED 4,5 W 350 mA
Constant Current / Constant Voltage 350 24V
220~240V 50Hz

Packaging

1 Box 0,61 x 0,54 x 1,1 m
Vol 0,3623 m³
Gross weight 10 Kg Net weight 4,6 Kg


Notes

Glass diffuser mounted on shelf
with dimmable light.
USB charging connection.
LED on/off switch under the shelf.
Electric cable 2,5 m.

UNTIL STOCK RUNS OUT

LED IP20 EAC Dimmer

6032



Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **93/** _ _ White (RAL 9016)

Finish customization
(Available options:
Vibia colour palette)

LED temperature colour

/1 _ 2700 K F
CRI >90 791,0 lm 55 lm/W

Control

6032 _ _ **/** _ **5**
Push

Materials

Shelf: Aluminum. Diffuser: Polycarbonate.
Vertical tube: Steel. Lid: ABS with fiberglass.

Light Source and electronics

6 x LED STRIP 24V 1,63 W.
1 x LED 4,5 W 350 mA
Constant Current / Constant Voltage 350 24V
220~240V 50Hz

Packaging

1 Box 0,61 x 0,54 x 1,1 m
Vol 0,3623 m³
Gross weight 10,3 Kg Net weight 4,9 Kg

Notes

Reading light mink (Pantone 407C),
mounted on shelf with dimmable light.
USB charging connection.
LED on/off switch under the shelf.
Electric cable 2,5 m.


UNTIL STOCK RUNS OUT

LED IP20 EAC Dimmer

Wall



6035



Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **93/** _ _ White (RAL 9016)

Finish customization
(Available options:
Vibia colour palette)

LED temperature colour

/1 _ 2700 K E
CRI >90 131,8 lm 81 lm/W

Control

6035 _ _ **/** _ **0**
On/ Off

Materials

Shelf: Aluminum. Diffuser: Polycarbonate.
Lid: Steel.

Light Source and electronics

1 x LED STRIP 24V 1,63 W
Constant Voltage 24V
220~240V 50Hz

Packaging


1 Box 0,21 x 0,48 x 0,21 m
Vol 0,0212 m^3
Gross weight 1,8 Kg Net weight 1,5 Kg

Notes

UNTIL STOCK RUNS OUT

LED IP20 CE EAC

6040



Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **93/** _ _ White (RAL 9016)

Finish customization
(Available options:
Vibia colour palette)

LED temperature colour

/1 _ 2700 K E
CRI >90 485 lm 121 lm/W

Control

6040 _ _ **/** _ **0**
On/ Off

Materials

Shelf: Aluminum. Diffuser: Blown-glass.
Lid: Steel.

Light Source and electronics


1 x LED 4,5 W 350 mA
Constant Current 350 mA
220~240V 50Hz

Packaging

1 Box 0,21 x 0,48 x 0,21 m
Vol 0,0212 m^3
Gross weight 2,6 Kg Net weight 1,6 Kg

LED IP20 CE EAC

6041



Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **93/** _ _ White (RAL 9016)

Finish customization
(Available options:
Vibia colour palette)

LED temperature colour

/1 _ 2700 K E
CRI >90 485 lm 121 lm/W

Control

6041 _ _ **/** _ **0**
On/ Off

Materials

Shelf: Aluminum. Diffuser: Blown-glass.
Lid: Steel.

Light Source and electronics


1 x LED 4,5 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging

1 Box 0,21 x 0,48 x 0,21 m
Vol 0,0212 m^3
Gross weight 2,6 Kg Net weight 1,6 Kg

LED IP20 CE EAC

6045



Finishes
- **14/** _ _ Chocolate (RAL 8019)
- **93/** _ _ White (RAL 9016)

Finish customization (Available options: Vibia colour palette)

LED temperature colour
/1 _ 2700 K E
CRI >90 616,83 lm 101 lm/W

Control
6045 _ _ **/** _ **0**
On/ Off


Materials
Shelf: Aluminum. Diffuser: Polycarbonate.
Lid: Steel.

Light Source and electronics
1 x LED STRIP 24V 1,63W.
1 x LED 4,5W 350mA.
Constant Current / Constant Voltage 350 24V
220~240V 50Hz

Packaging
1 Box 0,29 x 0,38 x 0,38 m
Vol 0,418 m^3
Gross weight 2,6 Kg Net weight 1,8 Kg

LED IP20 CE EAC

6046



Finishes
- **14/** _ _ Chocolate (RAL 8019)
- **93/** _ _ White (RAL 9016)

Finish customization (Available options: Vibia colour palette)

LED temperature colour
/1 _ 2700 K E
CRI >90 616,83 lm 101 lm/W

Control
6046 _ _ **/** _ **0**
On/ Off


Materials
Shelf: Aluminum. Diffuser: Polycarbonate.
Lid: Steel.

Light Source and electronics
1 x LED STRIP 24V 1,63W.
1 x LED 4,5W 350mA.
Constant Current / Constant Voltage 350 24V
220~240V 50Hz

Packaging
1 Box 0,29 x 0,38 x 0,38 m
Vol 0,418 m^3
Gross weight 2,6 Kg Net weight 1,8 Kg

LED IP20 CE EAC

6050



Finishes
- **93/** _ _ White (RAL 9016)

LED temperature colour
/1 _ 2700 K E
CRI >90 485 lm 121 lm/W

Control
6050 _ _ **/** _ **0**
On/ Off

Materials
Wall support: Aluminum.
Diffuser: Blown-glass

Light Source and electronics
1 x LED 4,5W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,13 x 0,20 x 0,21 m
Vol 0,00055 m^3
Gross weight 0,6 Kg Net weight 0,4 Kg

LED IP20 CE EAC

Tube

Design by Ichiro Iwasaki

Shade Landscape. A fluid gesture outlines the tubes, which when set out over a space become the structure that facilitates a meeting of the shades in a harmonious coming together.

Ceiling Pendants

6100

ø 28,5 cm



6105

ø 41 cm



6110

ø 52 cm



6115

97 cm



6160



ø 22 cm

6165





ø 28,5 cm

Product specifications subject to change without notice. Please check vibia.com for updated information.


Each project is unique. Visit vibia.com and chose among multiple compositions designed and adapted to your project needs.

Personalise your own Tube composition quick and easy at vibia.com

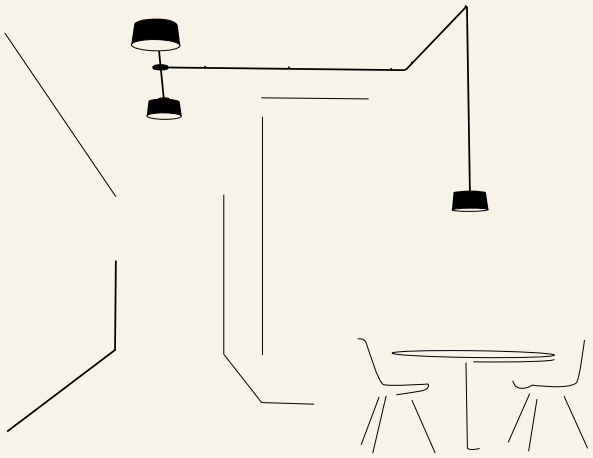

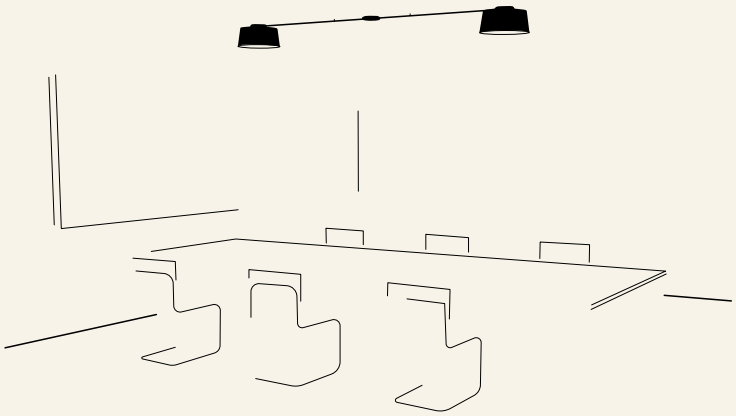

6100



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **15/** _ _ Grey L2 (NCS S 2500-N)
- **16/** _ _ Grey M1 (NCS S 4500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

LED temperature colour

/1 _ 2700 K E
CRI >90 1476,7 lm 109 lm/W

/2 _ 3000 K F
CRI >90 1521,0 lm 113 lm/W

/3 _ 3500 K F
CRI >90 1550,6 lm 114,9 lm/W

Control

6100 _ _ **/** _ **A**
DALI-2

Materials

Diffuser: Polycarbonate. Led support: Aluminum.
Shade: Aluminum. Canopy: Steel.

Light Source and electronics


1 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,40 x 0,40 x 0,35 m
Vol 0,056 m^3
Gross weight 4,5 Kg Net weight 2,5 Kg

LED IP20 CE EAC Bi-volt

6105



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **15/** _ _ Grey L2 (NCS S 2500-N)
- **16/** _ _ Grey M1 (NCS S 4500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

LED temperature colour

- **/1** _ 2700 K E
  CRI >90 2413,2 lm 121 lm/W
- **/2** _ 3000 K E
  CRI >90 2485,6 lm 124 lm/W
- **/3** _ 3500 K E
  CRI >90 2533,9 lm 126,7 lm/W

Control

6105 _ _ / _ A
DALI-2

Materials

Diffuser: Polycarbonate. Led support: Aluminum.
Shade: Aluminum. Canopy: Steel.

Light Source and electronics


1 x LED PLATE 20 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,60 x 0,60 x 0,40 m
Vol 0,144 m³
Gross weight 5,5 Kg Net weight 3,5 Kg

LED IP20 CE EAC Bi-volt

6110



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **15/** _ _ Grey L2 (NCS S 2500-N)
- **16/** _ _ Grey M1 (NCS S 4500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

LED temperature colour

- **/1** _ 2700 K D
  CRI >90 3299,1 lm 132 lm/W
- **/2** _ 3000 K E
  CRI >90 3398,1 lm 136 lm/W
- **/3** _ 3500 K E
  CRI >90 3464,0 lm 138,6 lm/W

Control

6110 _ _ / _ A
DALI-2

Materials

Diffuser: Polycarbonate. Led support: Aluminum.
Shade: Aluminum. Canopy: Steel.

Light Source and electronics

1 x LED PLATE 25 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging


1 Box 0,60 x 0,60 x 0,40 m
Vol 0,144 m³
Gross weight 6,5 Kg Net weight 4,5 Kg

Notes

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

6115



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **71/** _ _ Grey L2, Grey M1, Black Grey (NCS S 2500-N, NCS S 4500-N, NCS S 7000-N)

LED temperature colour

- **/1** _ 2700 K E
  CRI >90 7189,0 lm 123 lm/W
- **/2** _ 3000 K E
  CRI >90 7404,7 lm 127 lm/W
- **/3** _ 3500 K E
  CRI >90 7548,5 lm 129 lm/W

Control

6115 _ _ / _ A
DALI-2

Materials

Diffuser: Polycarbonate. Led support: Aluminum.
Shade: Aluminum. Canopy: Steel.

Light Source and electronics

1 x LED PLATE 13,5 W 700 mA
1 x LED PLATE 20 W 700 mA
1 x LED PLATE 25 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 1 x 1 x 0,40 m
Vol 0,40 m³
Gross weight 16 Kg Net weight 12 Kg

Notes

Require only one electrical connection on the big shade.


UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

1160 10 /1 A _18

Model
Finish
LED temperature colour
Control
Electrical connection
Only for pendants

6160



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **15/** _ _ Grey L2 (NCS S 2500-N)
- **16/** _ _ Grey M1 (NCS S 4500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K E
CRI >90 1170 lm 111 lm/W

/2 _ 3000 K E
CRI >90 1251 lm 119 lm/W

/3 _ 3500 K E
CRI >90 1251 lm 119 lm/W

Control

6160 _ _ **/** _ **1**
DALI

6160 _ _ **/** _ **B**
1-10V, Push

6160 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Shade: Aluminum.
Led support: Aluminum. Tube: Steel. Canopy: Steel.

Light Source and electronics

1 x LED PLATE 10,5 W
Constant Current 700 mA
110~240V 50/60Hz

Packaging

Total Vol 0,04 m3
Gross weight 4,2 Kg Net weight 1,6 Kg

Notes


Extra cable length.

LED IP20 CE EAC Bi-volt

Electrical connection

Surface
_18 Free Wire
_23 Built-in
_31 Remote Micro
for plaster ceilings
_32 Remote XXS
for all types of drop ceilings

6165



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **15/** _ _ Grey L2 (NCS S 2500-N)
- **16/** _ _ Grey M1 (NCS S 4500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

/1 _ 2700 K E
CRI >90 1170 lm 111 lm/W

/2 _ 3000 K E
CRI >90 1251 lm 119 lm/W

/3 _ 3500 K E
CRI >90 1251 lm 119 lm/W

Control

6165 _ _ **/** _ **1**
DALI

6165 _ _ **/** _ **B**
1-10V, Push

6165 _ _ **/** _ **Z**
Casambi

Materials

Diffuser: Polycarbonate. Shade: Aluminum.
Led support: Aluminum. Tube: Steel. Canopy: Steel.

Light Source and electronics

1 x LED PLATE 13,5 W
Constant Current 700 mA
110~240V 50/60Hz

Packaging

Total Vol 0,04 m3
Gross weight 4,3 Kg Net weight 1,7 Kg

Notes

Extra cable length.


LED IP20 CE EAC Bi-volt

Electrical connection


Surface
_18 Free Wire
_23 Built-in
_31 Remote Micro
for plaster ceilings
_32 Remote XXS
for all types of drop ceilings

Composing pendants


Next sketches are composed by one or more compositions

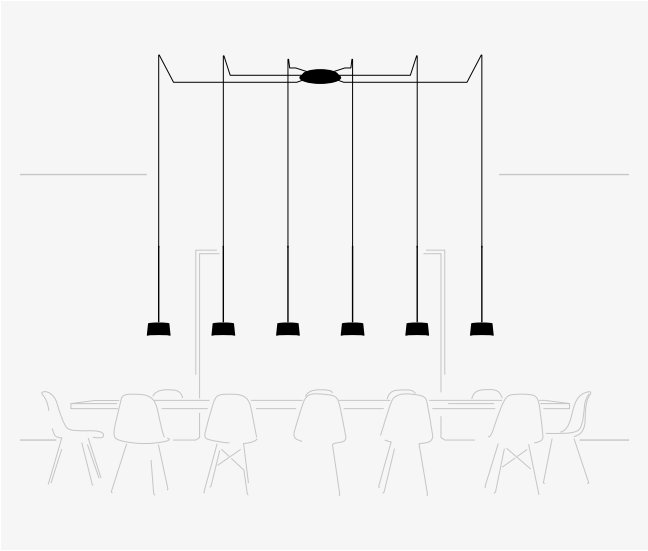

6 x 6165.

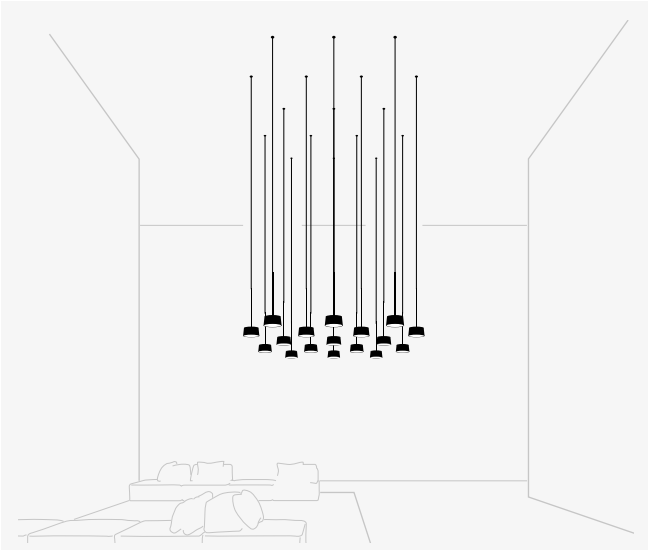

17 x 6160.

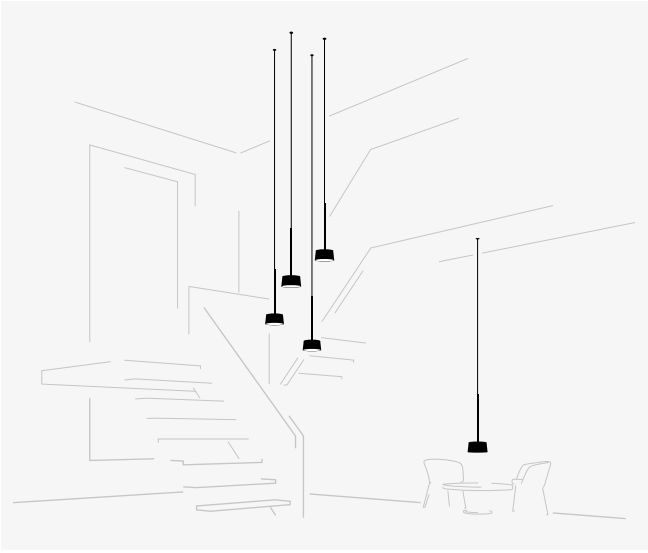

5 x 6160.

Each project is unique. Visit vibia.com and chose among multiple compositions designed and adapted to your project needs.

Personalise your own Tube composition quick and easy at vibia.com



Electrical connection options for models 6160 / 6165

Choose your preferred installation option accordingto your needs.
For each composition, the optimal minimum number of drivers will be delivered.

Drop ceiling

The innovative remote and built-in fittings accentuate the silkiness and lightness of compositions on suspended ceilings, its great visual grandeur taking center stage.

For Ref. 6160 / 6165

Remote



Micro ø 3 cm
height 7 cm
for plaster ceilings. Black finish.





XXS ø 6 cm
height 6 cm
for all types of drop ceilings. Match with fixture finish.

Built-in



ø 8 cm
height 6 cm
match with fixture finish.







Regular ceiling

When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.

For Ref. 6160 / 6165


Surface




ø 16,8 cm

match with fixture finish.


Free Wire




ø 20 cm



ø 22 cm





ø 36 cm



ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendants.







Plusminus

Design by Diez Office.

Plusminus is a versatile lighting system that takes the concept of the light rail to a new level. The conductive textile ribbon at its core allows for free placement of the luminaires and the creation of unique light solutions on the spot.






Easy to design and install


Compose a personalised Plusminus at **vibia.com**

From scratch

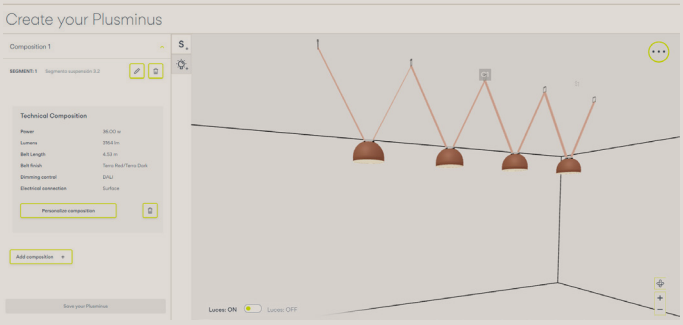

+ Create and compose projects in detail.
+ Draw and customise in 3D to see it in space.
+ Or customise it step by step without drawing.

From a layout

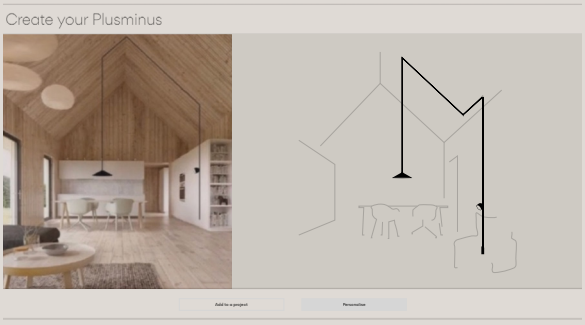


+ Customise and adapt it to the needs of your project.
+ Add it to your project and edit it at any time.
+ More than 100 creations for you.

Product specifications subject to change without notice. Please check vibia.com for updated information.





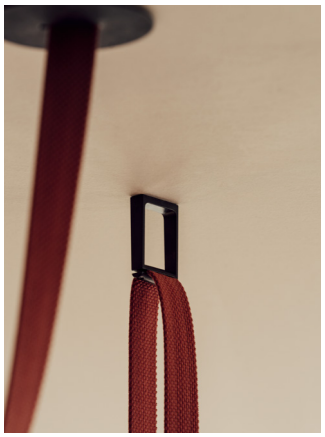

Easy connection
Fix / Click / Connect

Each belt, which can be cut as needed, accommodates multiple luminaires and operates with simple plug-in technology for unparalleled ease of installation and connection. The belt offers adjustments in tension from taut to relaxed as well as click-and-connect functionality, snapping into a buckle attached to each luminaire.

Luminaire types and lighting effects



Sphere



360° Diffusion lighting
distributes light equally in all directions (360°). It attracts a relaxed gaze towards the point of light, and creates a calm, very comfortable atmosphere.
The light sphere bathes all surfaces of the space, producing a peaceful, richer and extremely homogenous ambience.



Semisphere


Directed diffusion lighting
emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. The opaque part of the shade helps to direct the light through the diffuser, providing illumination that is both peaceful and concentrated at the same time.



Cone

Directed diffusion lighting
emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. The opaque part of the shade helps to direct the light through the diffuser, providing illumination that is both peaceful and concentrated at the same time.

Spotlight



Directed diffusion lighting
emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. It is ideal for reading situations or when the light output is visible, as it does not produce glare.


Accent lighting
emphasizes objects or architectural elements with intensive cones of light. Luminance contrasts attract the eye and bring the illuminated objects into the foreground.
The light output is directed towards the object or architectural element and not towards the person, in order to avoid glare.





Linear Diffuser

General lighting
provides a high degree of uniformity on the horizontal plane and generates a first layer of illumination on which to add more specific lighting applications. It generates soft shadows and subdued brightness in which the space and its component elements do not display visual hierarchies.

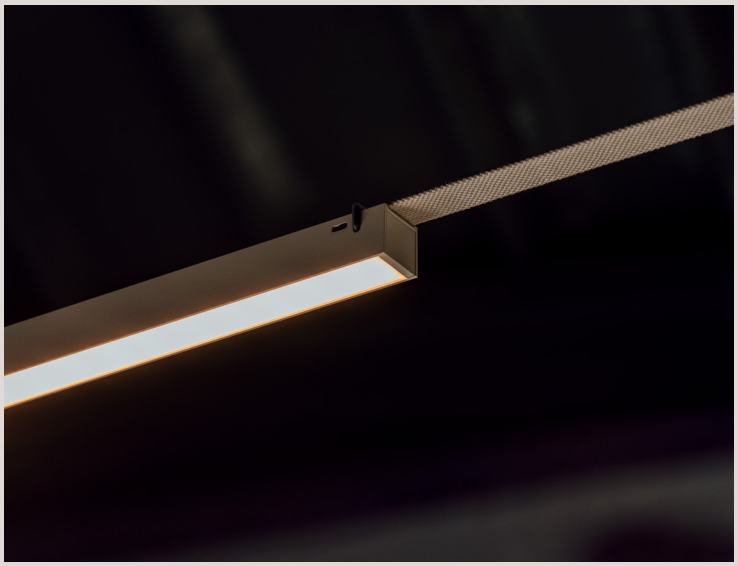

Linear Low UGR



High-efficiency, low-glare general linear lighting
offers medium brightness and clarity of forms. Direct illumination, extended beam and luminaire performance enable installations with high-energy efficiencies and low-glare levels below UGR<19.

High-comfort, low-glare general linear lighting
provides high levels of illumination and comfort with UGR levels below 19. It is also ideal for work or meeting areas.





Luminaire types

It is not possible to order luminaires alone, you need to design your Plusminus on our website vibia.com

Sphere



Ø 20 cm


6230



Ø 30 cm

6235

6230



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour

/1 _ 2700 K E
CRI >90 846 lm 107,09 lm/W

/2 _ 3000 K E
CRI >90 884 lm 111,9 lm/W

/3 _ 3500 K E
CRI >90 916 lm 115,95 lm/W

Control

6230 _ _ **/** _ **0**
On/ Off

6230 _ _ **/** _ **F**
Simultaneous line
DALI, 1-10V, Push, Casambi

6230 _ _ **/** _ **Z**
Casambi integrated on each individual luminaire (P2P)

Materials

Diffuser: Triplex opal glass.
Body: Aluminum.

Light Source and electronics

1 x LED 7,9 W 450 mA


Packaging

1 Box 0,26 x 0,26 x 0,260 m
Vol 0,0175 m³
Gross weight 1,56 Kg Net weight 0,93 Kg

LED IP20 EAC

Bi-volt Dimmer

6235



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour

/1 _ 2700 K F
CRI >90 1492 lm 93,25 lm/W

/2 _ 3000 K F
CRI >90 1569 lm 98,06 lm/W

/3 _ 3500 K F
CRI >90 1606 lm 100,38 lm/W

Control

6235 _ _ **/** _ **0**
On/ Off

6235 _ _ **/** _ **F**
Simultaneous line
DALI, 1-10V, Push, Casambi

6235 _ _ **/** _ **Z**
Casambi integrated on each individual luminaire (P2P)

Materials

Diffuser: Triplex opal glass.
Body: Aluminum.

Light Source and electronics

1 x LED 16 W 850 mA

Packaging

1 Box 0,364 x 0,364 x 0,364 m
Vol 0,0482 m³
Gross weight 2,50 Kg Net weight 1,80 Kg

LED IP20 EAC

Bi-volt Dimmer

Product specifications subject to change without notice. Please check vibia.com for updated information.

Semisphere



Ø 20 cm


6220



Ø 30 cm

6225

6220



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour

- **/1** _ 2700 K E
  CRI >90 846 lm 107,09 lm/W
- **/2** _ 3000 K E
  CRI >90 884 lm 111,9 lm/W
- **/3** _ 3500 K E
  CRI >90 916 lm 115,95 lm/W

Control

6220 _ _ **/** _ **0**
On/ Off

6220 _ _ **/** _ **F**
Simultaneous line
DALI, 1-10V, Push, Casambi

6220 _ _ **/** _ **Z**
Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Light Source and electronics


1 x LED 7,9 W 450 mA

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0175 m³
Gross weight 1,20 Kg Net weight 0,78 Kg

LED IP20 CE EAC
Bi-volt Dimmer

6225



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour

- **/1** _ 2700 K F
  CRI >90 1492 lm 93,25 lm/W
- **/2** _ 3000 K F
  CRI >90 1569 lm 98,06 lm/W
- **/3** _ 3500 K F
  CRI >90 1606 lm 100,38 lm/W

Control

6225 _ _ **/** _ **0**
On/ Off

6225 _ _ **/** _ **F**
Simultaneous line
DALI, 1-10V, Push, Casambi

6225 _ _ **/** _ **Z**
Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Light Source and electronics

1 x LED 16 W 850 mA

Packaging

1 Box 0,364 x 0,364 x 0,364 m
Vol 0,0482 m³
Gross weight 2 Kg Net weight 1,5 Kg

LED IP20 CE EAC
Bi-volt Dimmer

Luminaire types

It is not possible to order luminaires alone, you need to design your Plusminus on our website vibia.com

Cone



Ø 60 cm


6240



Ø 80 cm

6245

6240



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour

/1 _ 2700 K F
CRI >90 1492 lm 93,25 lm/W

/2 _ 3000 K F
CRI >90 1569 lm 98,06 lm/W

/3 _ 3500 K F
CRI >90 1606 lm 100,38 lm/W

Control

6240 _ _ **/** _ **0**
On/ Off

6240 _ _ **/** _ **F**
Simultaneous line
DALI, 1-10V, Push, Casambi

6240 _ _ **/** _ **Z**
Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: Triplex opal glass.

Light Source and electronics

1 x LED 16 W 850 mA


Packaging

0,727 x 0,727 x 0,32 m
Vol 0,1691 m³
Gross weight 5 Kg Net weight 2,5 Kg

LED IP20 CE EAC

Bi-volt Dimmer

6245



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour

/1 _ 2700 K F
CRI >90 1492 lm 93,25 lm/W

/2 _ 3000 K F
CRI >90 1569 lm 98,06 lm/W

/3 _ 3500 K F
CRI >90 1606 lm 100,38 lm/W

Control

6245 _ _ **/** _ **0**
On/ Off

6245 _ _ **/** _ **F**
Simultaneous line
DALI, 1-10V, Push, Casambi

6245 _ _ **/** _ **Z**
Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: Triplex opal glass.

Light Source and electronics

1 x LED 16 W 850 mA

Packaging

1 Box 0,96 x 0,96 x 0,27 m
Vol 0,2488 m³
Gross weight 7 Kg Net weight 3,5 Kg

LED IP20 CE EAC

Bi-volt Dimmer

Product specifications subject to change without notice. Please check vibia.com for updated information.

Spotlight



Ø 10 cm

6200



Ø 10 cm


6205 6210



Ø 10 cm

6215

6200



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour

- **/1** _ 2700 K E
  CRI >90 846 lm 107,09 lm/W
- **/2** _ 3000 K E
  CRI >90 884 lm 111,9 lm/W
- **/3** _ 3500 K E
  CRI >90 916 lm 115,95 lm/W

Control

6200 _ _ **/** _ **0**
On/ Off

6200 _ _ **/** _ **F**
Simultaneous line
DALI, 1-10V, Push, Casambi

6200 _ _ **/** _ **Z**
Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Light Source and electronics

1 x LED 7,9 W 450 mA


Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,719 Kg Net weight 0,51 Kg

LED IP20 CE EAC
Bi-volt Dimmer

6205

Medium flood 24°



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour

- **/1** _ 2700 K E
  CRI >90 846 lm 107,09 lm/W
- **/2** _ 3000 K E
  CRI >90 884 lm 111,9 lm/W
- **/3** _ 3500 K E
  CRI >90 916 lm 115,95 lm/W

Control

6205 _ _ **/** _ **0**
On/ Off

6205 _ _ **/** _ **F**
Simultaneous line
DALI, 1-10V, Push, Casambi

6205 _ _ **/** _ **Z**
Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Light Source and electronics

1 x LED 7,9 W 450 mA

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,719 Kg Net weight 0,51 Kg


LED IP20 CE EAC
Bi-volt Dimmer

Luminaire types

It is not possible to order luminaires alone, you need to design your Plusminus on our website vibia.com

6210

Wide flood 55°



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour

/1 _ 2700 K E
CRI >90 846 lm 107,09 lm/W

/2 _ 3000 K E
CRI >90 884 lm 111,9 lm/W

/3 _ 3500 K E
CRI >90 916 lm 115,95 lm/W

Control

6210 _ _ **/** _ **0**
On/ Off

6210 _ _ **/** _ **F**
Simultaneous line
DALI, 1-10V, Push, Casambi

6210 _ _ **/** _ **Z**
Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Light Source and electronics

1 x LED 7,9 W 450 mA

Packaging


1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,719 Kg Net weight 0,51 Kg

LED IP20 CE EAC

Bi-volt Dimmer

6215

Directed diffusion lighting



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour

/1 _ 2700 K E
CRI >90 491 lm 116,9 lm/W

/2 _ 3000 K E
CRI >90 513 lm 122,14 lm/W

/3 _ 3500 K E
CRI >90 532 lm 126,67 lm/W

Control

6215 _ _ **/** _ **0**
On/ Off

6215 _ _ **/** _ **F**
Simultaneous line
DALI, 1-10V, Push, Casambi

6215 _ _ **/** _ **Z**
Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Light Source and electronics

1 x LED 4,2 W 250 mA

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,719 Kg Net weight 0,51 Kg

LED IP20 CE EAC


Bi-volt Dimmer

Accent lighting




Directed diffusion lighting



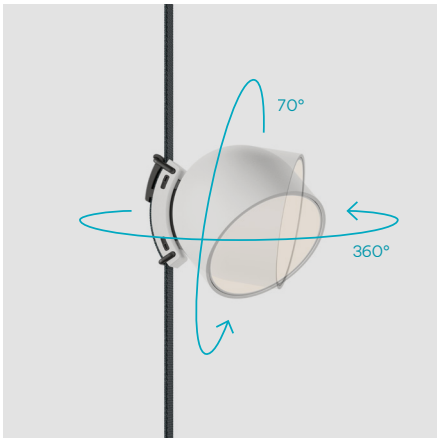


Product specifications subject to change without notice. Please check vibia.com for updated information.

Linear diffuser

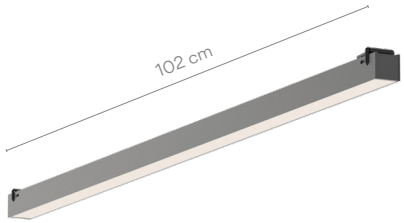


6250

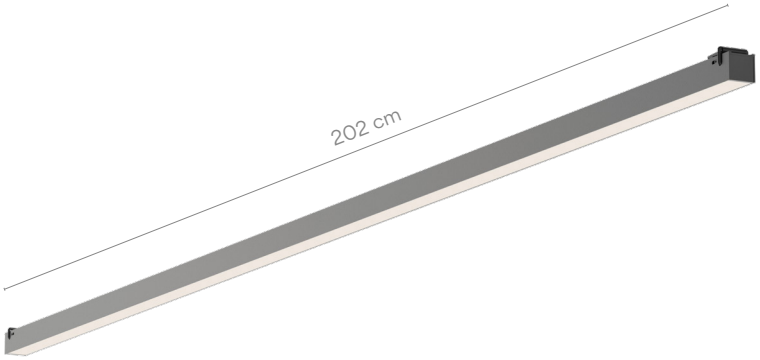

6255

6250



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour

- **/1** _ 2700 K C
  CRI >90 2544 lm 123,5 lm/W
- **/2** _ 3000 K C
  CRI >90 2628 lm 127,57 lm/W
- **/3** _ 3500 K C
  CRI >90 2712 lm 131,65 lm/W

Control

6250 _ _ **/** _ **0**
On/ Off

6250 _ _ **/** _ **F**
Simultaneous line
DALI, 1-10V, Push, Casambi

6250 _ _ **/** _ **Z**
Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Light Source and electronics


1 x LED STRIP 20,6 W 24 V

Packaging

1 Box 0,06 x 0,06 x 1,25 m
Vol 0,0057 m³
Gross weight 1,5 Kg Net weight 0,72 Kg

LED IP20 EAC
Bi-volt Dimmer

6255



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour

- **/1** _ 2700 K D
  CRI >90 5088 lm 123,5 lm/W
- **/2** _ 3000 K D
  CRI >90 5256 lm 127,57 lm/W
- **/3** _ 3500 K D
  CRI >90 5424 lm 131,65 lm/W

Control

6255 _ _ **/** _ **0**
On/ Off

6255 _ _ **/** _ **F**
Simultaneous line
DALI, 1-10V, Push, Casambi

6255 _ _ **/** _ **Z**
Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Light Source and electronics

1 x LED STRIP 41,3 W 24 V

Packaging


1 Box 0,06 x 0,06 x 2,24 m
Vol 0,0103 m³
Gross weight 2 Kg Net weight 1,45 Kg

LED IP20 EAC
Bi-volt Dimmer


Linear Low UGR
High-Comfort




6260




6265

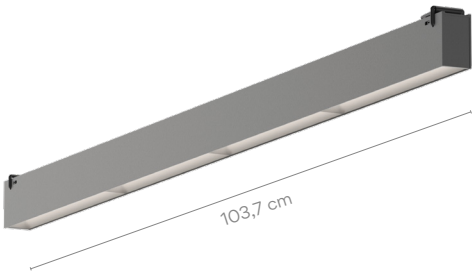

6270



6260



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour

/1 _ 2700 K D
CRI >90 1281 lm 124,37 lm/W

/2 _ 3000 K D
CRI >90 1323 lm 128,45 lm/W

/3 _ 3500 K D
CRI >90 1366 lm 132,62 lm/W

Control

6260 _ _ / _ 0
On/ Off

6260 _ _ / _ F
Simultaneous line
DALI, 1-10V, Push, Casambi

6260 _ _ / _ Z
Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PET.

Light Source and electronics

1 x LED STRIP 20,6 W 24 V

Packaging


1 Box 0,08 x 0,11 x 0,32 m
Vol 0,0028 m^3
Gross weight 0,8 Kg Net weight 0,41 Kg

Notes

UGR <19

LED IP20 CE EAC
Bi-volt Dimmer

6265



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour

/1 _ 2700 K D
CRI >90 2562 lm 124,37 lm/W

/2 _ 3000 K D
CRI >90 2647 lm 128,5 lm/W

/3 _ 3500 K D
CRI >90 2731 lm 132,57 lm/W

Control

6265 _ _ / _ 0
On/ Off

6265 _ _ / _ F
Simultaneous line
DALI, 1-10V, Push, Casambi

6265 _ _ / _ Z
Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PET.

Light Source and electronics

1 x LED STRIP 20,6 W 24 V

Packaging


1 Box 0,08 x 0,11 x 0,57 m
Vol 0,0050 m³
Gross weight 1,5 Kg Net weight 0,89 Kg

Notes

UGR <19

LED IP20 CE EAC
Bi-volt Dimmer

6270



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour

/1 _ 2700 K D
CRI >90 5124 lm 124,07 lm/W

/2 _ 3000 K D
CRI >90 5293 lm 128,16 lm/W

/3 _ 3500 K D
CRI >90 5462 lm 132,25 lm/W

Control

6270 _ _ / _ 0
On/ Off

6270 _ _ / _ F
Simultaneous line
DALI, 1-10V, Push, Casambi

6270 _ _ / _ Z
Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PET.

Light Source and electronics

1 x LED STRIP 41,3 W 24 V

Packaging

1 Box 0,08 x 0,11 x 1,10 m
Vol 0,0096 m³
Gross weight 2,5 Kg Net weight 1,5 Kg

Notes


UGR <19

LED IP20 CE EAC
Bi-volt Dimmer


Linear Low UGR
High-Efficiency




6275




6280

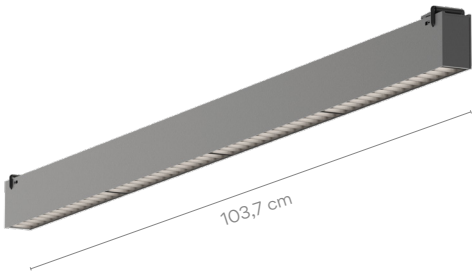

6285



6275



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour

/1 _ 2700 K D
CRI >90 1281 lm 124,37 lm/W

/2 _ 3000 K D
CRI >90 1323 lm 128,45 lm/W

/3 _ 3500 K D
CRI >90 1366 lm 132,62 lm/W

Control

6275 _ _ / _ 0
On/ Off

6275 _ _ / _ F
Simultaneous line
DALI, 1-10V, Push, Casambi

6275 _ _ / _ Z
Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.

Light Source and electronics

1 x LED STRIP 10,3 W 24 V

Packaging

1 Box 0,08 x 0,11 x 0,32 m
Vol 0,0028 m^3
Gross weight 0,8 Kg Net weight 0,41 Kg


Notes

UGR <19

LED IP20 CE EAC

Bi-volt Dimmer

6280



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour

/1 _ 2700 K D
CRI >90 2562 lm 124,37 lm/W

/2 _ 3000 K D
CRI >90 2647 lm 128,5 lm/W

/3 _ 3500 K D
CRI >90 2731 lm 132,57 lm/W

Control

6280 _ _ / _ 0
On/ Off

6280 _ _ / _ F
Simultaneous line
DALI, 1-10V, Push, Casambi

6280 _ _ / _ Z
Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.

Light Source and electronics

1 x LED STRIP 20,6 W 24 V

Packaging

1 Box 0,08 x 0,11 x 0,57 m
Vol 0,0050 m³
Gross weight 1,5 Kg Net weight 0,89 Kg


Notes

UGR <19

LED IP20 CE EAC

Bi-volt Dimmer

6285



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED temperature colour

/1 _ 2700 K D
CRI >90 5124 lm 124,07 lm/W

/2 _ 3000 K D
CRI >90 5293 lm 128,16 lm/W

/3 _ 3500 K D
CRI >90 5462 lm 132,25 lm/W

Control

6285 _ _ / _ 0
On/ Off

6285 _ _ / _ F
Simultaneous line
DALI, 1-10V, Push, Casambi

6285 _ _ / _ Z
Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.

Light Source and electronics

1 x LED STRIP 41,3 W 24V

Packaging

1 Box 0,08 x 0,11 x 1,102 m
Vol 0,0096 m³
Gross weight 2,5 Kg Net weight 1,5 Kg

Notes

UGR <19

LED IP20 CE EAC

Bi-volt Dimmer

Accessories Toolbox

Thought out to the smallest detail.
Receive your personalised accessories
toolbox for a quick and easy installation.





 Product specifications subject to change without notice. Please check vibia.com for updated information.

Installation accessories


You will receive a personalised accessories toolbox per every composition made at vibia.com. The Toolbox includes some extra units for on-site adjustments.



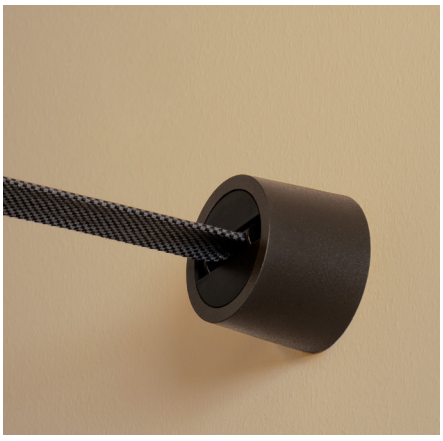


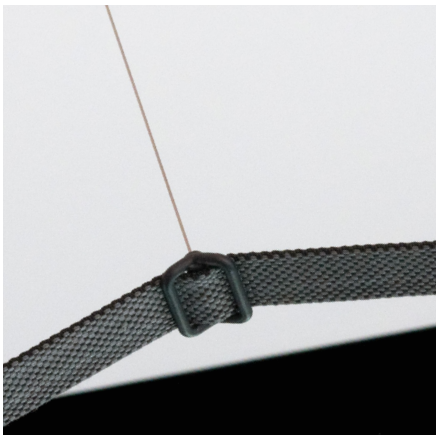


Belt terminations options



B3
Belt End Cap




B4
Double End Cap




B5
Pendant End Cap


Fasten accessories options




F1
Circular Ratchet




F2
Circular Anchor



F3
Belt Support



F4
Counterweight



F5
Corner Support




F6
Freestyle Bar
2 m. bar length
5 m. maximum tensor cable


Tension clips options



T1
Suspension Clip



T2
V-Tension Clip



T3
Parallel Tension Clip S



T4
Parallel Tension Clip M



T5
Cable End Cap



T6
Pendant Cable S



T7
Pendant Cable M

Materials
Counterweight: Cast iron

Finishes
11 Black (NCS S 0300-N)

Electrical connection options

Choose your preferred installation option according to your needs.



Surface



Built-in



Remote


Built-in



Surface



Plug




Optional wire connector

Dimming control options

Choose your preferred installation option according to your needs.

Dimming Control	**Electrical Connection**			
	Surface 25 - 240 W	Built-in 25 - 240 W	Remote 25 - 240 W	Plug Max 60W
On/ Off	✓	✓	✓	✓
Push Switch	–	–	–	✓
Push Simultaneous	✓	✓	✓	–
1-10V Simultaneous	✓	✓	✓	–
DALI Simultaneous	✓	✓	✓	–
Casambi Simultaneous	✓	✓	✓	✓
Casambi integrated on each individual luminaire (P2P)	✓	✓	✓	✓



Surface Canopy S
E1 Ø 205 mm.

Wattage options:
< 60W.


Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line DALI / 1-10V / Push / Casambi.
Casambi integrated on each individual luminaire (P2P).

Body: ABS.
Net weight 0,9 Kg.

11 Black
(NCS S 8500-N)

IP20 CE EAC Dimmer Bi-volt



Surface Canopy M
E2 Ø 260 mm.

Wattage options:
>60W.
<240W.


Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line DALI / 1-10V / Push / Casambi.
Casambi integrated on each individual luminaire (P2P).

Body: ABS.
Net weight 1,8 Kg.

11 Black
(NCS S 8500-N)

IP20 CE EAC Dimmer Bi-volt



Built-in Canopy
E3 Ø 120 mm.

Wattage options:
>25W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.


Dimming options:
On/ Off.
Simultaneous line DALI / 1-10V / Push / Casambi.
Casambi integrated on each individual luminaire (P2P).

Body: ABS.
Net weight 1,08 - 1,860 Kg.

11 Black
(NCS S 8500-N)

25/40/60W
IP20 CE EAC Dimmer Bi-volt

120/240W
IP20 CE EAC Dimmer Bi-volt



Remote Built-in Canopy
E4 Ø 60 mm.

Wattage options:
>25W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.


Dimming options:
On/ Off.
Simultaneous line DALI / 1-10V / Push / Casambi.
Casambi integrated on each individual luminaire (P2P).

Body: ABS.
Net weight 0,87 - 1,65 Kg.

11 Black
(NCS S 8500-N)

25/40/60W
IP20 CE EAC Dimmer Bi-volt

120/240W
IP20 CE EAC Dimmer Bi-volt



Remote Surface Canopy
E5 Ø 60 mm.

Wattage options:
>25W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.


Dimming options:
On/ Off.
Simultaneous line DALI / 1-10V / Push / Casambi.
Casambi integrated on each individual luminaire (P2P).

Body: Aluminum.
Net weight 0,95 - 1,73 Kg.

11 Black
(NCS S 8500-N)

25/40/60W
IP20 CE EAC Dimmer Bi-volt

120/240W
IP20 CE EAC Dimmer Bi-volt



Plug-in Floor Switch
E6 Ø 90 mm.

Wattage options:
< 60W.


Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Push.
Casambi P2P.

Body: ABS.

11 Black
(NCS S 8500-N)

IP20 CE EAC Dimmer Bi-volt



Wire Connector
E8 Ø 3,1 mm.

Wattage options:
< 60W.

Wire connector
E8 Ø 5,8 mm.

Wattage options:
< 60W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 50/60Hz.

Body: ABS.

11 Black
(NCS S 8500-N)

IP20 CE EAC


Belt


Maximum 60 metres per electrical connection, belt length personalised for each composition on **www.vibia.com**

Finishes
Black
Terra Red
Blue
Beige

Belt
Polyester

Fire Hazard Testing. GW-960.
fulfills the requirements of:
standards EN 60695-2-10:2013;
EN 60695-2-11:2015;
EN 60695-2-12:2011 / A1:2014

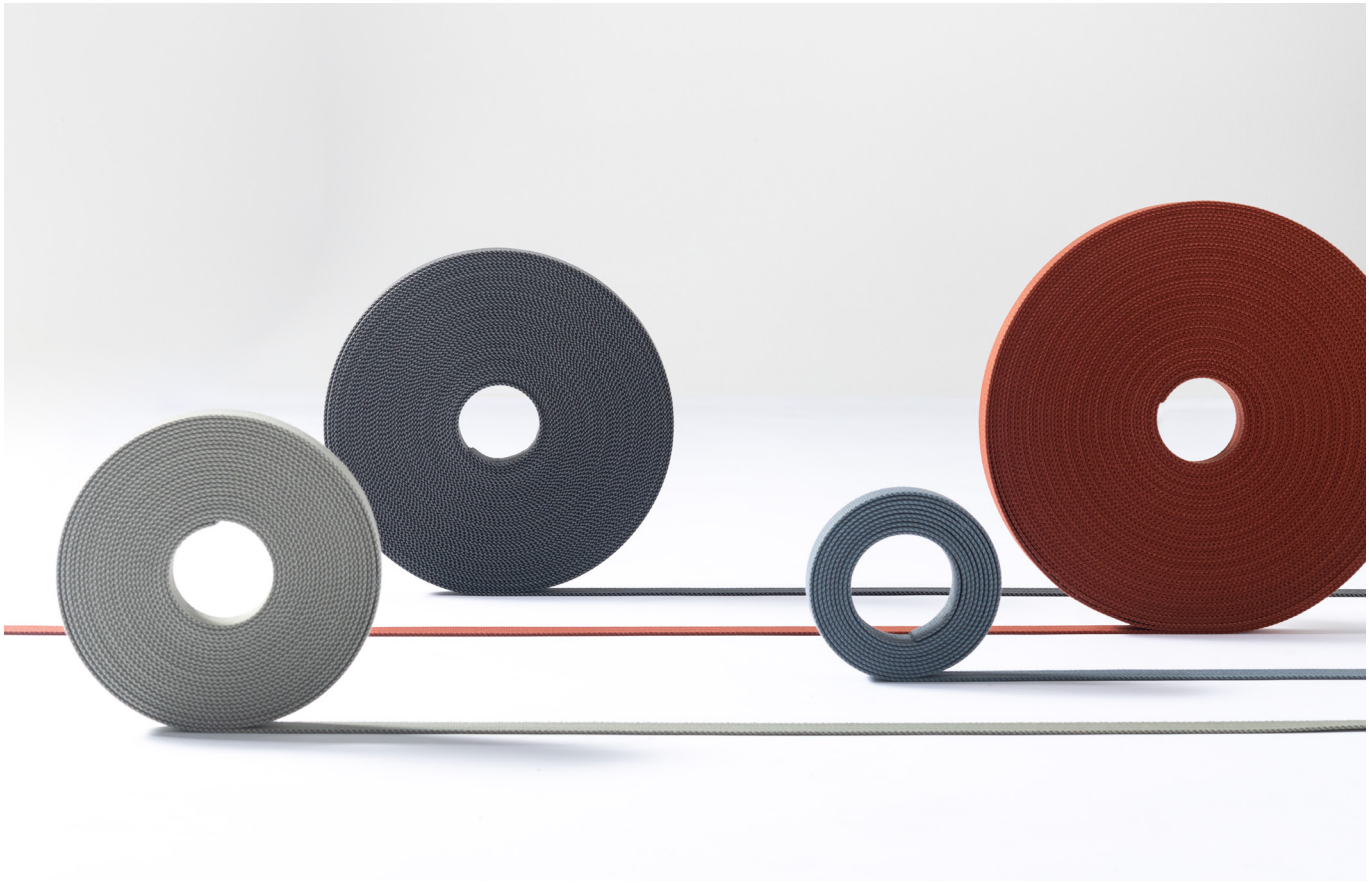

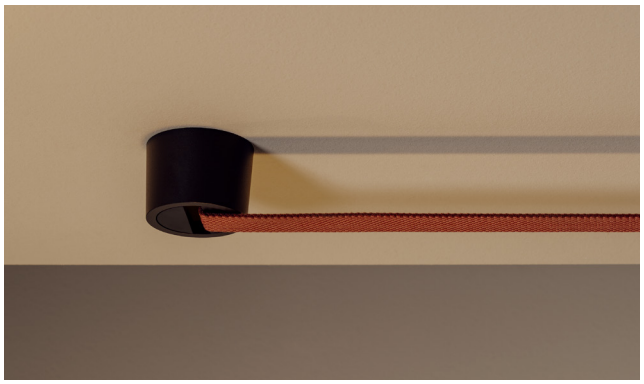


The distance of the belt from the wall or the ceiling, when installed in parallel, is always 4,5 cm.

Belt terminations

Belt terminations can be adjusted during the installation process according to your preference.





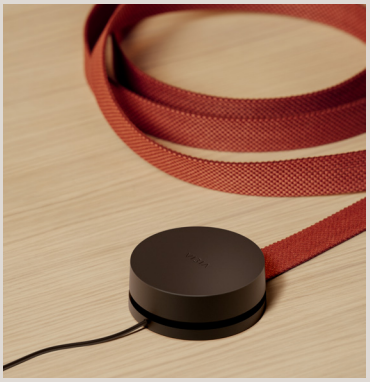






Composition examples for orientative prices


The final price of the composition depends on the number of luminaires, belt length, dimming control and the electrical connection type chosen.

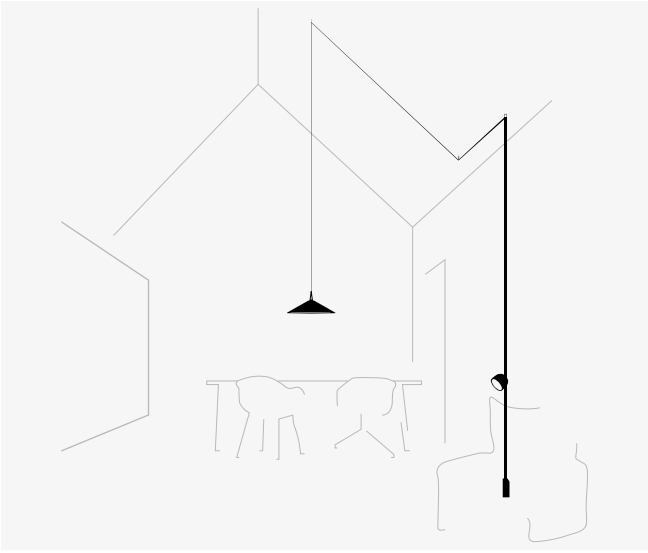Composition examples for orientative prices




Sketch composed by one composition.

2 luminaires: Cone 6240, Spotlight 6215.

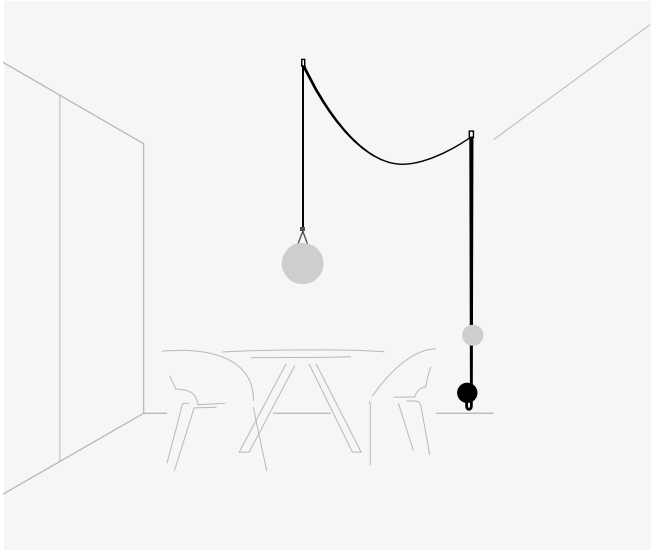


Sketch composed by one composition.

2 luminaires: Sphere 6230, Sphere 6235.

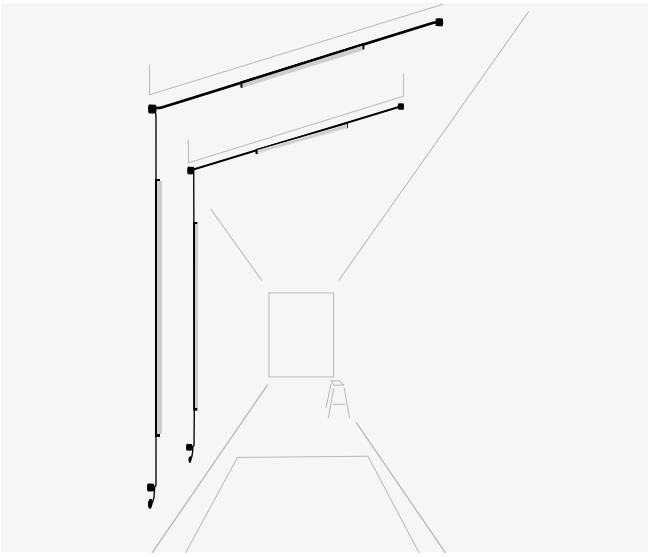

Sketch composed by two identical compositions.

2 luminaires: Linear Diffuser 6250, Linear Diffuser 6255.

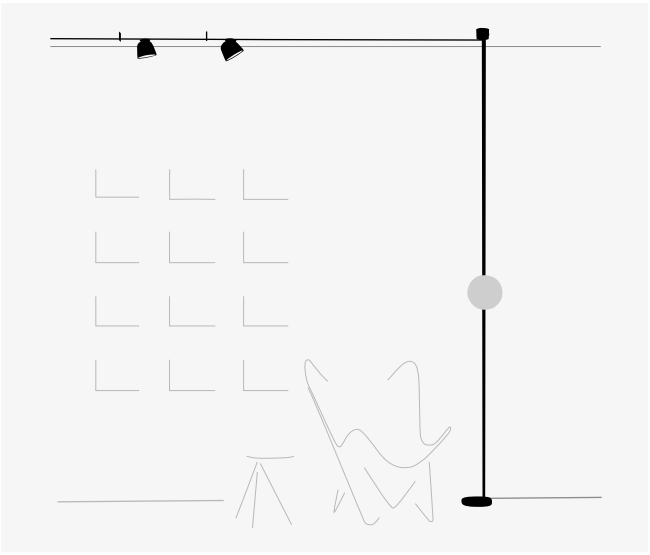


Sketch composed by one composition.

3 luminaires: Spotlight 6205 x 2, Sphere 6230.




Sketch composed by one composition.

1 luminaire: Sphere 6230.

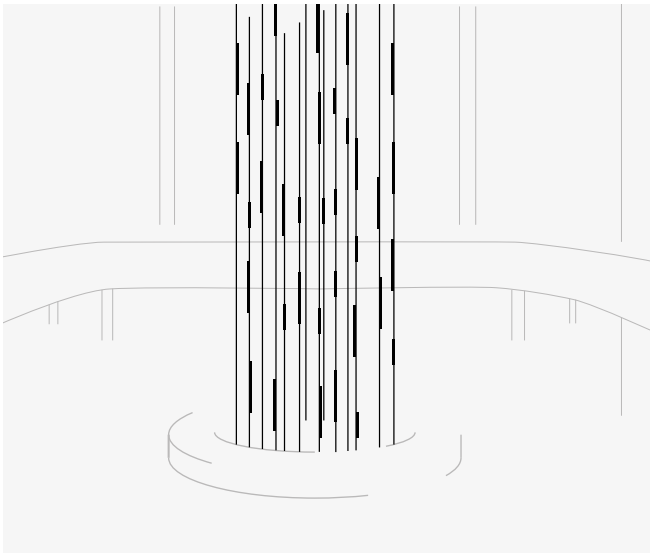


Sketch composed by several compostions.

3 luminaires: Linear Diffuser 6255.

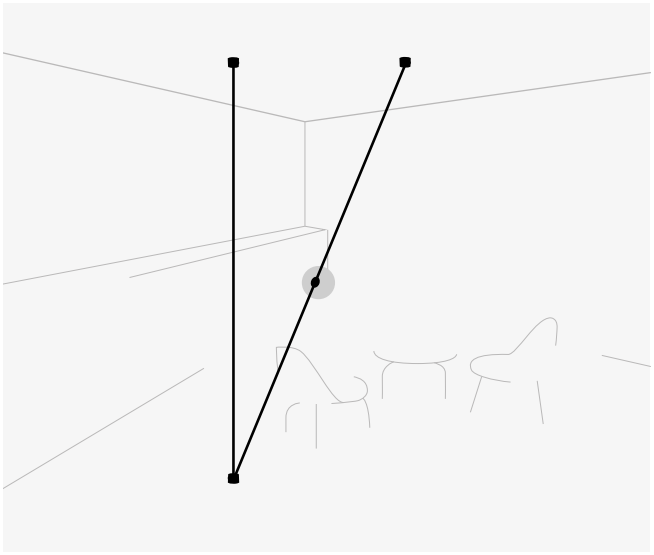

Sketch composed by one composition.


1 luminaire: Sphere 6230.

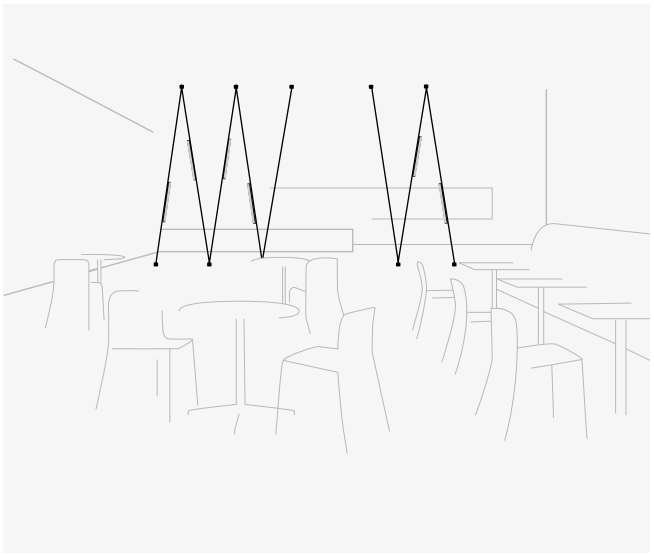

Sketch composed by two compositions.


2 luminaires: Linear Diffuser 6250.

Composition examples for orientative prices

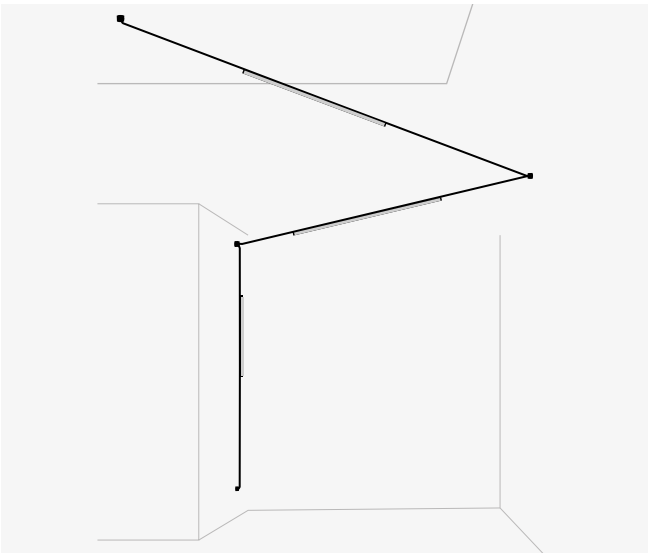


Sketch composed by one composition.

3 luminaires: Linear Diffuser 6250, Linear Diffuser 6255 x 2.

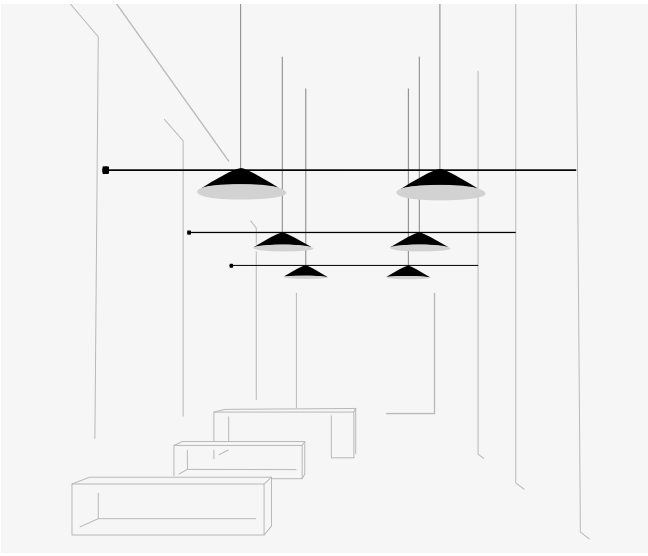


Sketch composed by three identical compositions.

2 luminaires: Cone 6245 x 2.

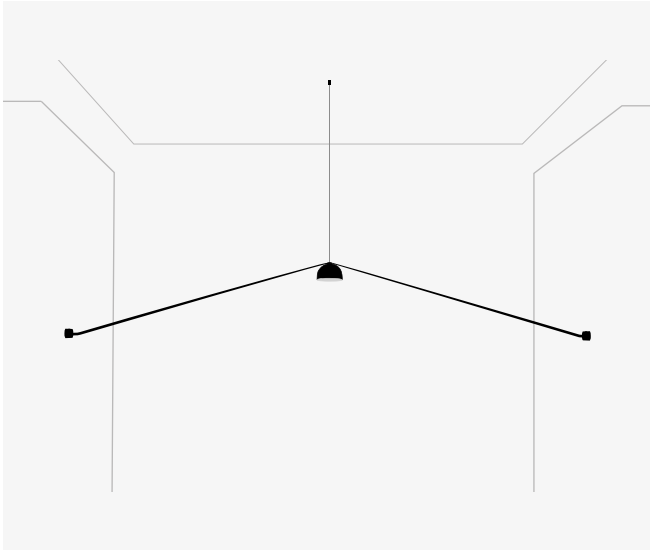


Sketch composed by one composition.

1 luminaire: Semisphere 6225.

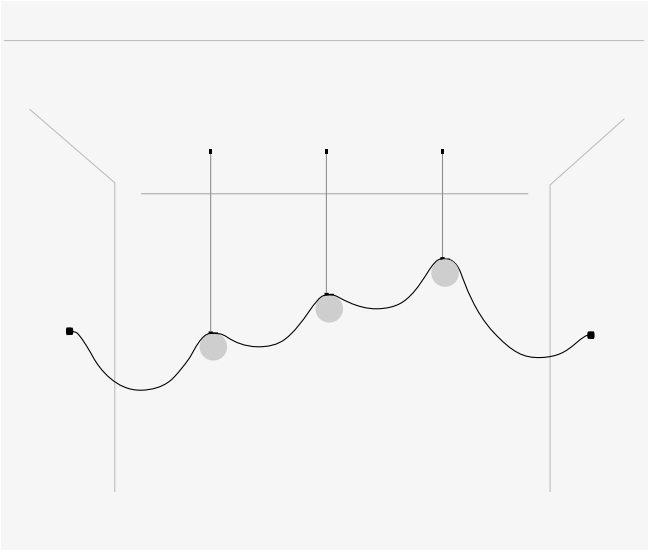


Sketch composed by one composition.

3 luminaires: Sphere 6230 x 3.

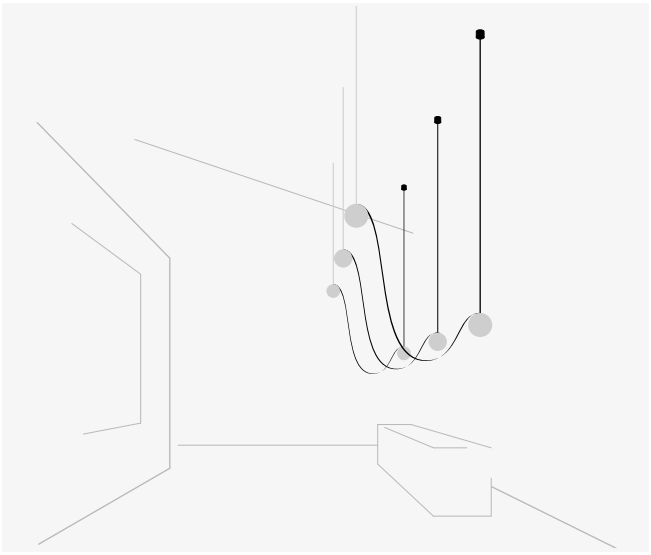


Sketch composed by three identical compositions.

2 luminaires: Sphere 6235 x 2.

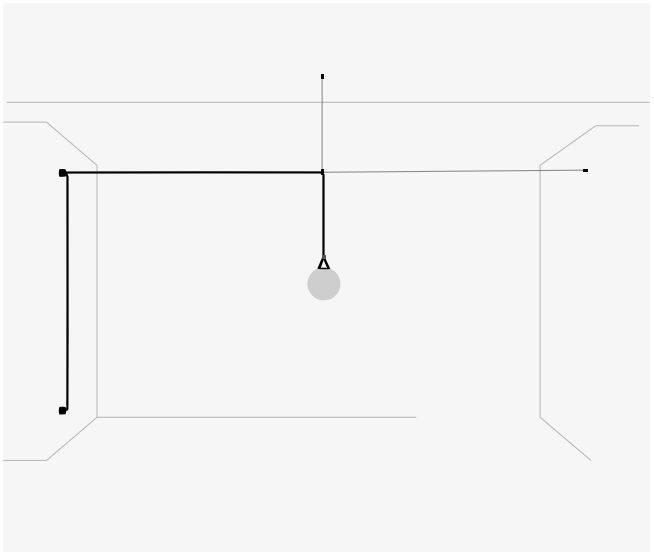


Sketch composed by one composition.

1 luminaire: Sphere 6235.

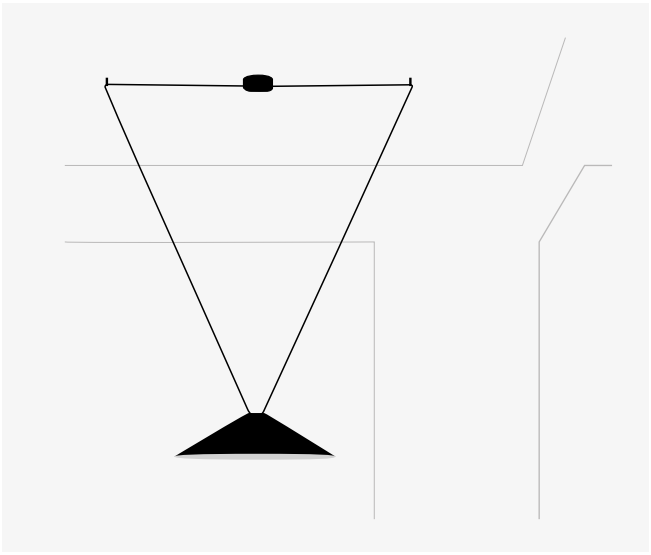

Sketch composed by one composition.


1 luminaire: Cone 6245.

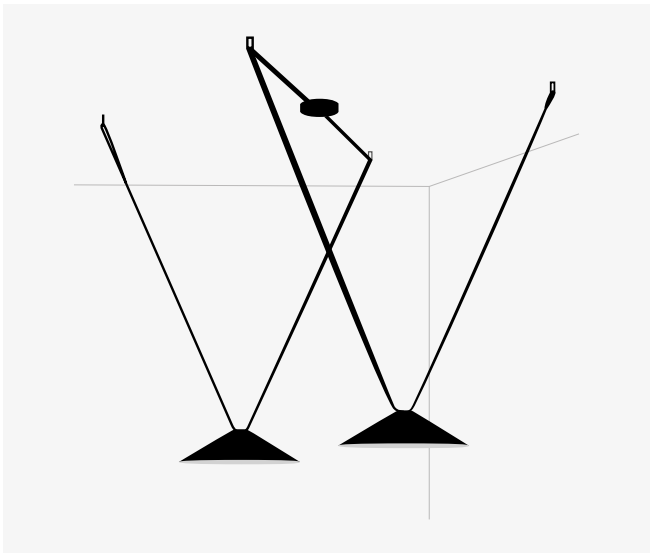

Sketch composed by one composition.


2 luminaires: Cone 6240 x 2.

Composition examples for orientative prices

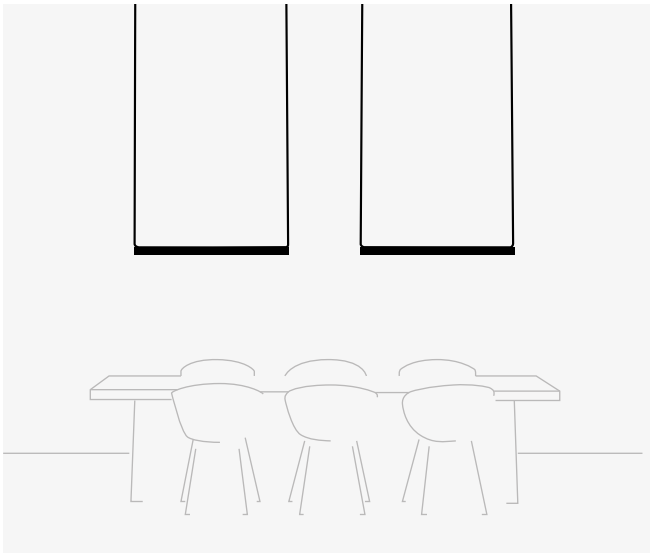


Sketch composed by one composition.

2 luminaires: Linear Low UGR High-Comfort 6270 x 2.

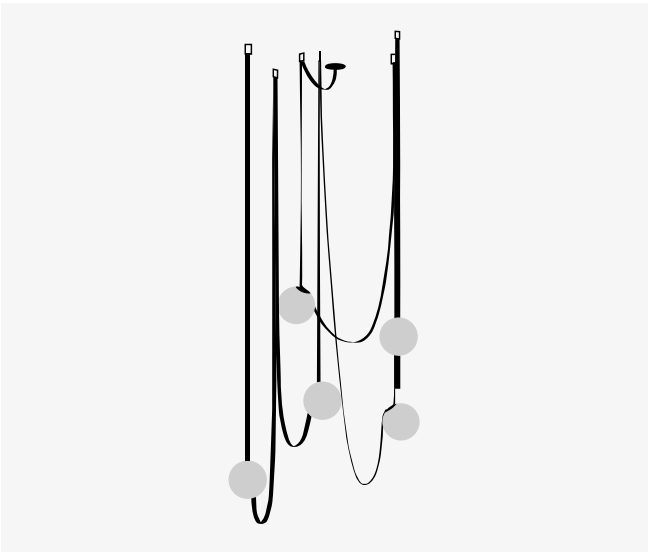


Sketch composed by one composition.

5 luminaires: Sphere 6230 x 5.

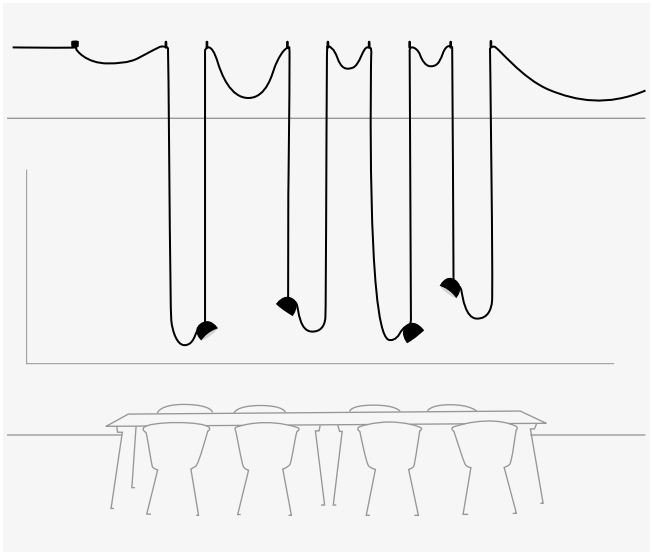


Sketch composed by one composition.

4 luminaires: Semiphere 6220 x 4.

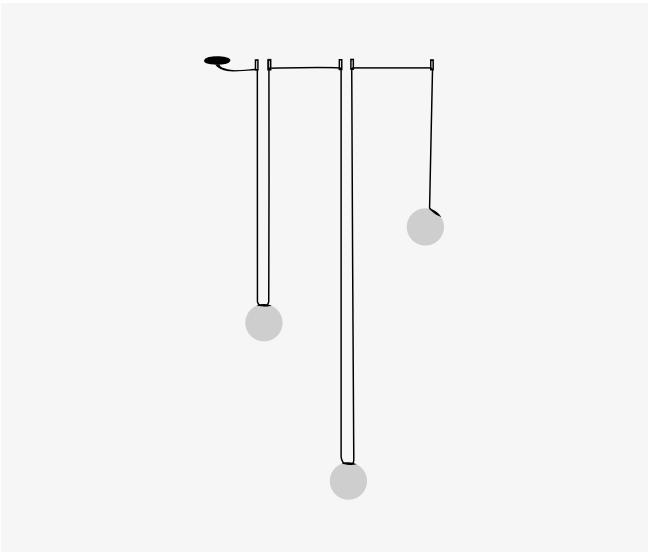


Sketch composed by one composition.

3 luminaires: Sphere 6230 x 3.

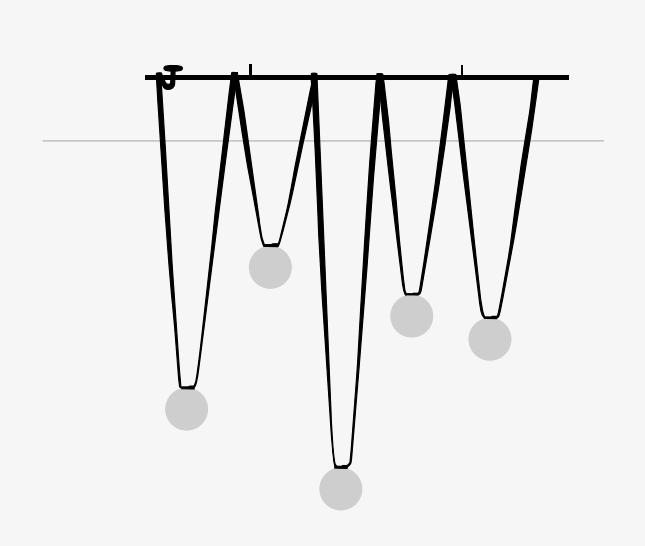

Sketch composed by one composition.

5 luminaires: Sphere 6230 x 5.

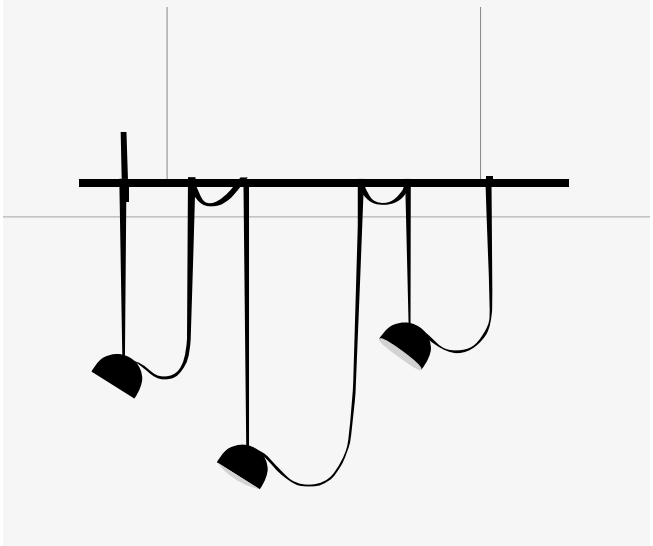

Sketch composed by one composition.

3 luminaires: Semisphere 6220 x 3.

Each project is unique.
Visit vibia.com and chose among
multiple compositions designed
and adapted to your project needs.

Personalise your own Plusminus composition
quick and easy at vibia.com

Kontur

Design by Sebastian Herkner

Providing a framework for light, the Kontur collection serves as an elegant stage setting for the linear light source it contains. Its minimalist black frame pairs with different diffusers or reflectors in a poetic balance, creating myriad lighting ambiances.

Wall



20 x 92 cm

6414



20 x 122 cm

6416



20 x 162 cm

6418



19 x 92 cm


6444



19 x 122 cm

6446

6414



Finishes

● **11/** _ _ Black
(NCS S 8500-N)

LED temperature colour

/7 _ 2200 K F
CRI >90 2041,15 lm 97,2 lm/W

/1 _ 2700 K E
CRI >90 2381,3 lm 113 lm/W

/2 _ 3000 K F
CRI >90 2381,3 lm 113 lm/W

Control

6414 _ _ **/** _ **1**
DALI

6414 _ _ **/** _ **3**
1-10V

6414 _ _ **/** _ **5**
Push

6414 _ _ **/** _ **Z**
Casambi

Materials

Concave shade: Aluminum. Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 20,8 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz


Packaging

1 Box 0,30 x 0,30 x 1,05 m
Vol 0,095 m³
Gross weight 5,5 Kg Net weight 3,5 Kg

LED IP20 CE EAC

Dimmer Multi-volt

6416



Finishes

● **11/** _ _ Black
(NCS S 8500-N)

LED temperature colour

/7 _ 2200 K F
CRI >90 2703,32 lm 96,9 lm/W

/1 _ 2700 K E
CRI >90 3153,9 lm 113 lm/W

/2 _ 3000 K F
CRI >90 3153,0 lm 113 lm/W

Control

6416 _ _ **/** _ **1**
DALI

6416 _ _ **/** _ **3**
1-10V

6416 _ _ **/** _ **5**
Push

6416 _ _ **/** _ **Z**
Casambi

Materials

Concave shade: Aluminum. Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 27,9 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging


1 Box 0,30 x 0,30 x 1,35 m
Vol 0,122 m³
Gross weight 5,8 Kg Net weight 3,8 Kg

LED IP20 CE EAC

Dimmer Multi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

6418

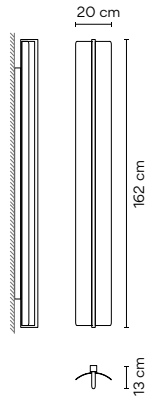

Finishes
- **11/** _ _ Black (NCS S 8500-N)

LED temperature colour
- **/7** _ 2200 K F
  CRI >90 3604,42 lm 96,9 lm/W
- **/1** _ 2700 K E
  CRI >90 4205,2 lm 113 lm/W
- **/2** _ 3000 K F
  CRI >90 4205,2 lm 113 lm/W

Control
- **6418** _ _ **/** _ **1**
  DALI
- **6418** _ _ **/** _ **3**
  1-10V
- **6418** _ _ **/** _ **5**
  Push
- **6418** _ _ **/** _ **Z**
  Casambi


Materials
Concave shade: Aluminum. Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum.

Light Source and electronics
1 x LED STRIP 37,2 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging
1 Box 0,30 x 0,30 x 0,175 m
Vol 0,1580 m³
Gross weight 6,5 Kg Net weight 4 Kg

LED IP20 CE EAC
Dimmer Multi-volt

6444



Finishes
- **11/** _ _ Black (NCS S 8500-N)

LED temperature colour
- **/7** _ 2200 K F
  CRI >90 2041,15 lm 98,1 lm/W
- **/1** _ 2700 K E
  CRI >90 2381,3 lm 114 lm/W
- **/2** _ 3000 K F
  CRI >90 2381,3 lm 114 lm/W
- **/3** _ 3500 K E
  CRI >90 2551,44 lm 122,7 lm/W

Control
- **6444** _ _ **/** _ **1**
  DALI
- **6444** _ _ **/** _ **3**
  1-10V
- **6444** _ _ **/** _ **5**
  Push
- **6444** _ _ **/** _ **Z**
  Casambi


Materials
Glass shade: Opal triplex Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum.

Light Source and electronics
1 x LED STRIP 20,8 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging
1 Box 0,30 x 0,30 x 1,05 m
Vol 0,095 m³
Gross weight 6,2 Kg Net weight 3,7 Kg

LED IP20 CE EAC
Dimmer Multi-volt

6446

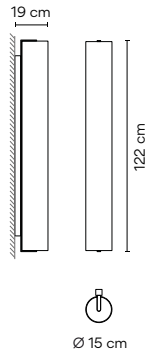

Finishes
- **11/** _ _ Black (NCS S 8500-N)

LED temperature colour
- **/7** _ 2200 K F
  CRI >90 2703,32 lm 96,9 lm/W
- **/1** _ 2700 K E
  CRI >90 3153,9 lm 113 lm/W
- **/2** _ 3000 K F
  CRI >90 3153,0 lm 113 lm/W
- **/3** _ 3500 K E
  CRI >90 3379,15 lm 121,1 lm/W

Control
- **6446** _ _ **/** _ **1**
  DALI
- **6446** _ _ **/** _ **3**
  1-10V
- **6446** _ _ **/** _ **5**
  Push
- **6446** _ _ **/** _ **Z**
  Casambi


Materials
Glass shade: Opal triplex Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum.

Light Source and electronics
1 x LED STRIP 27,9 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz


Packaging
1 Box 0,30 x 0,30 x 1,35 m
Vol 0,122 m³
Gross weight 9 Kg Net weight 6 Kg

LED IP20 CE EAC
Dimmer Multi-volt


Pendants

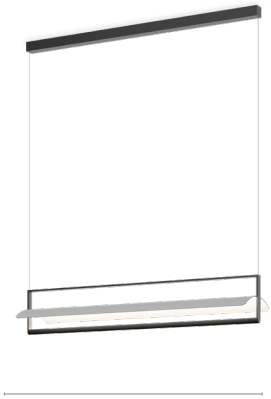

6434

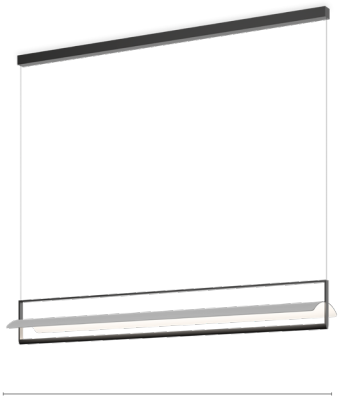

6436

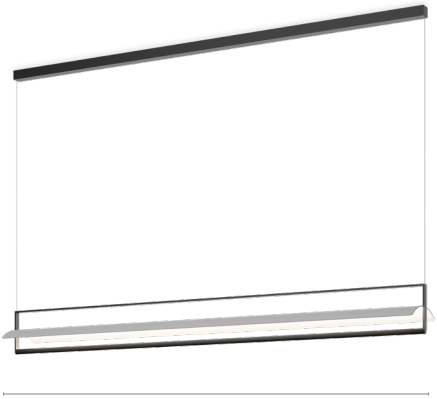

6438




6474



6476

6434



Finishes

● **11/** _ _ Black
(NCS S 8500-N)

LED temperature colour

/7 _ 2200 K F
CRI >90 2041,15 lm 98,1 lm/W

/1 _ 2700 K E
CRI >90 2381,3 lm 114 lm/W

/2 _ 3000 K F
CRI >90 2381,3 lm 114 lm/W

/3 _ 3500 K E
CRI >90 2551,44 lm 122,7 lm/W

Control

6434 _ _ **/** _ **1**
DALI

6434 _ _ **/** _ **3**
1-10V

6434 _ _ **/** _ **5**
Push

6434 _ _ **/** _ **Z**
Casambi

Materials

Concave shade: Aluminum. Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 20,8 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging

1 Box 0,30 x 0,30 x 1,05 m
Vol 0,095 m^3
Gross weight 5,5 Kg Net weight 3,5 Kg

Notes


Extra cable length.

LED IP20 CE EAC

Dimmer Multi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

6436



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED temperature colour
/7 _ 2200 K F
CRI >90 2703,32 lm 96,9 lm/W
/1 _ 2700 K E
CRI >90 3153,9 lm 113 lm/W
/2 _ 3000 K F
CRI >90 3154,0 lm 113 lm/W
/3 _ 3500 K E
CRI >90 3379,15 lm 121,1 lm/W

Control
6436 _ _ **/** _ **1**
DALI
6436 _ _ **/** _ **3**
1-10V
6436 _ _ **/** _ **5**
Push
6436 _ _ **/** _ **Z**
Casambi

Materials
Concave shade: Aluminum. Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum.


Light Source and electronics
1 x LED STRIP 27,9 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging
1 Box 0,30 x 0,30 x 1,35 m
Vol 0,122 m³
Gross weight 5,8 Kg Net weight 3,8 Kg

Notes
Extra cable length.

LED IP20 CE EAC
Dimmer Multi-volt

6438



Finishes
11/ _ _ Black
(NCS S 8500-N)

LED temperature colour
/7 _ 2200 K F
CRI >90 3604,42 lm 96,9 lm/W
/1 _ 2700 K E
CRI >90 4205,2 lm 113 lm/W
/2 _ 3000 K F
CRI >90 4205,2 lm 113 lm/W
/3 _ 3500 K E
CRI >90 4505,53 lm 121,1 lm/W

Control
6438 _ _ **/** _ **1**
DALI
6438 _ _ **/** _ **3**
1-10V
6438 _ _ **/** _ **5**
Push
6438 _ _ **/** _ **Z**
Casambi

Materials
Concave shade: Aluminum. Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum.


Light Source and electronics
1 x LED STRIP 37,2 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging
1 Box 0,30 x 0,30 x 1,75 m
Vol 0,158 m³
Gross weight 6,5 Kg Net weight 4 Kg

Notes
Extra cable length.

LED IP20 CE EAC
Dimmer Multi-volt

6474



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED temperature colour
/7 _ 2200 K F
CRI >90 2041,15 lm 98,1 lm/W
/1 _ 2700 K E
CRI >90 2381,3 lm 114 lm/W
/2 _ 3000 K F
CRI >90 2381,3 lm 114 lm/W

Control
6474 _ _ **/** _ **1**
DALI
6474 _ _ **/** _ **3**
1-10V
6474 _ _ **/** _ **5**
Push
6474 _ _ **/** _ **Z**
Casambi

Materials
Glass shade: Opal triplex. Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum.

Light Source and electronics
1 x LED STRIP 20,8 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz


Packaging
1 Box 0,30 x 0,30 x 1,05 m
Vol 0,095 m³
Gross weight 6,2 Kg Net weight 3,7 Kg

Notes
Extra cable length.

LED IP20 CE EAC
Dimmer Multi-volt

1160 | 10 | /1 | A
Model | Finish | LED temperature colour | Control

6476



Finishes

11/ _ _ Black
(NCS S 8500-N)

LED temperature colour

/7 _ 2200 K F
CRI >90 2703,32 lm 96,9 lm/W

/1 _ 2700 K E
CRI >90 3153,9 lm 113 lm/W

/2 _ 3000 K F
CRI >90 3153,0 lm 113 lm/W

Control

6476 _ _ **/** _ **1**
DALI

6476 _ _ **/** _ **3**
1-10V

6476 _ _ **/** _ **5**
Push

6476 _ _ **/** _ **Z**
Casambi

Materials

Glass shade: Opal triplex. Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 27,9 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz


Packaging

1 Box 0,75 x 0,45 x 1,35 m
Vol 0,122 m³
Gross weight 9 Kg Net weight 6 Kg

Notes

Extra cable length.

LED | IP20 | CE | EAC
Dimmer | Multi-volt

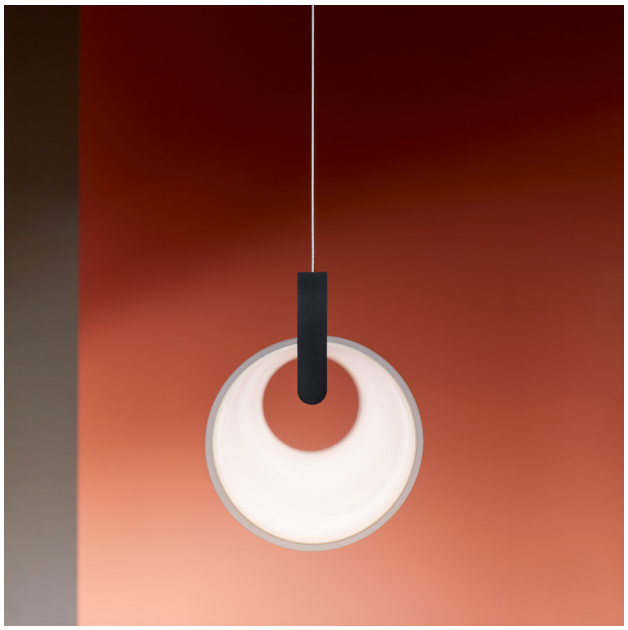




Sticks Connectable

Design by Arik Levy

Fusing technology, space, and architecture, Sticks offers a creative toolkit for integrating light elements in an interior. Pure and graphic, the minimalist aluminum rods transform linear light into floating sculpture.

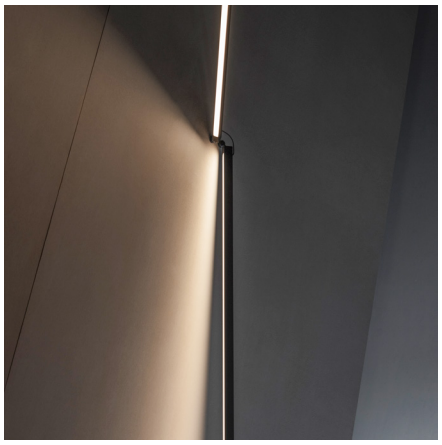






You can chose the desired composition through one of the following three options:

A - Choose among pre-designed layouts the one that fits with your project and order it directly (see page 366).

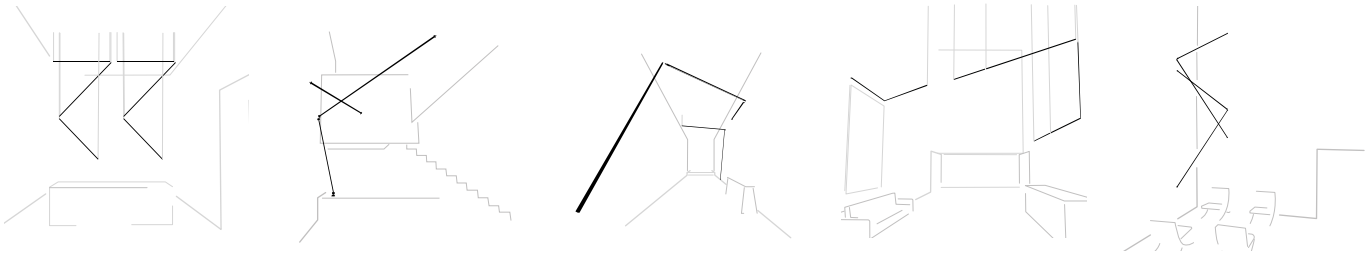

B - Select one composition on vibia.com among multiple applications in spaces, and adjust it to your project by modifying:

+ Length of the sticks.
+ Position of each stick in the space.
+ Colour temperature and dimming.
+ Installation type.



C - Create your configuration on vibia.com from scratch in three easy steps, without sketches.

1

Choose the location for your electrical connection point

2

Add connectable Sticks up to 6.5 meters

3

Configure

+ Colour temperature
+ Dimming control
+ Installation type
+ Pendants height

Technical Specifications
(see page 374)

The Sticks collection has three sizes: 1.5 m, 2 m, or 3 m,
and they can be connected one to each other
to a total maximum lenght of 6.5 meters per electrical connection.

Wall-Wall / Ceiling-Ceiling




7300. Stick 152 x 3 x 2 cm
7303. Stick 201 x 3 x 2 cm
7306. Stick 300 x 3 x 2 cm

Wall-Wall (corner) / Wall-Ceiling




7330. Stick 158 x 3 x 2 cm
7333. Stick 207 x 3 x 2 cm
7336. Stick 306 x 3 x 2 cm

Wall-Pendants

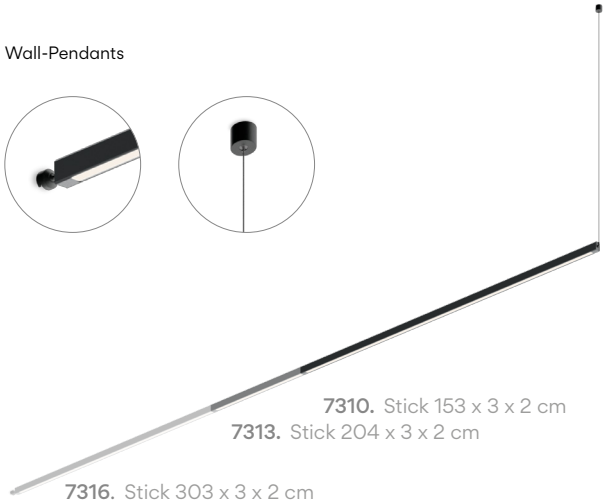


7310. Stick 153 x 3 x 2 cm
7313. Stick 204 x 3 x 2 cm
7316. Stick 303 x 3 x 2 cm

Pendants-Pendants

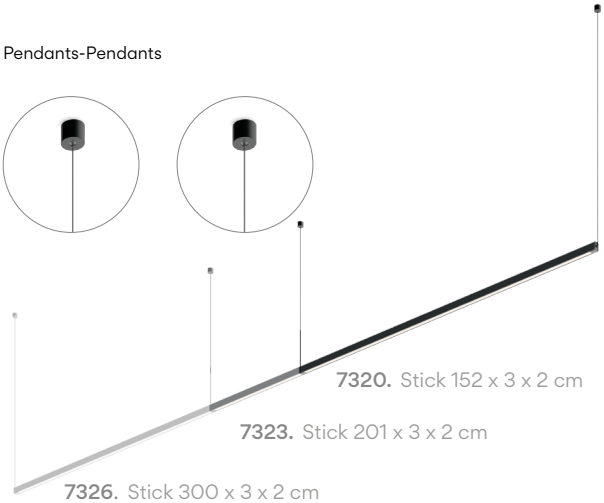

7320. Stick 152 x 3 x 2 cm
7323. Stick 201 x 3 x 2 cm
7326. Stick 300 x 3 x 2 cm

Pendants

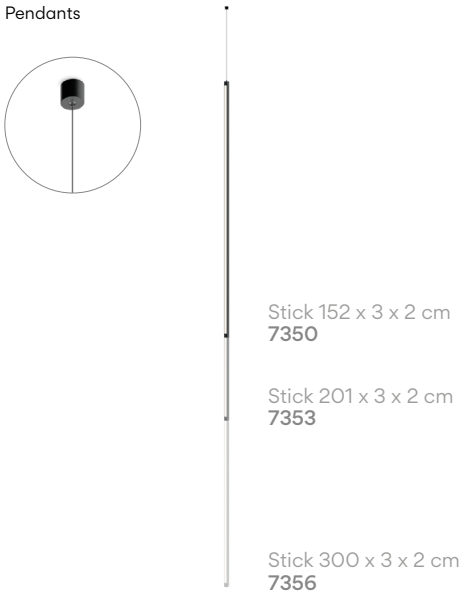


Stick 152 x 3 x 2 cm
7350

Stick 201 x 3 x 2 cm
7353

Stick 300 x 3 x 2 cm
7356

Floor-Wall

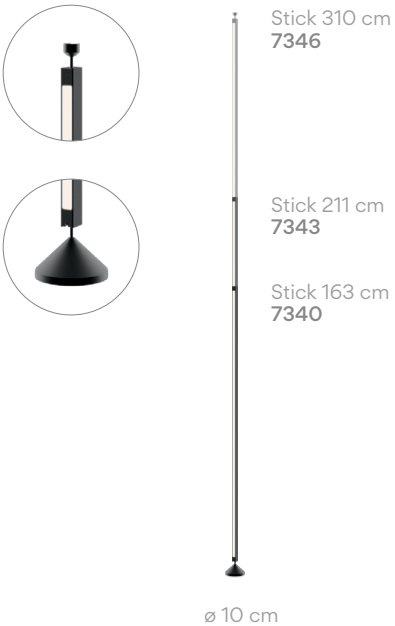

Stick 310 cm
7346

Stick 211 cm
7343


Stick 163 cm
7340

ø 10 cm

Sticks Connectable


Next sketches are composed by one or more compositions

Pendant / Ceiling

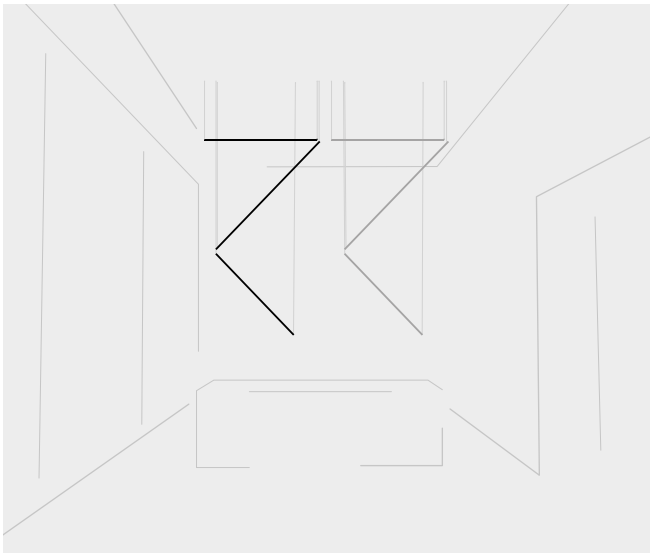


STI001
Sketch composed by two identical compositions.

Each composition:
3 Sticks: 2 x 150 cm, 1 x 200 cm. Total 5 m.
LED 4000 K. 11870 lm. 88 W.
Remote driver Built-in Micro. 1-10V.

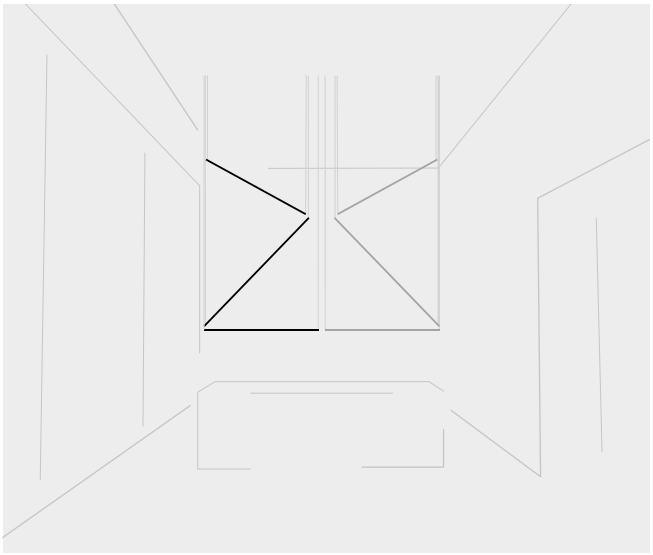

STI005
Sketch composed by two identical compositions.


Each composition:
3 Sticks: 2 x 150 cm, 1 x 200 cm. Total 5 m.
LED 4000 K. 11870 lm. 88 W.
Remote driver Built-in Micro. 1-10V.

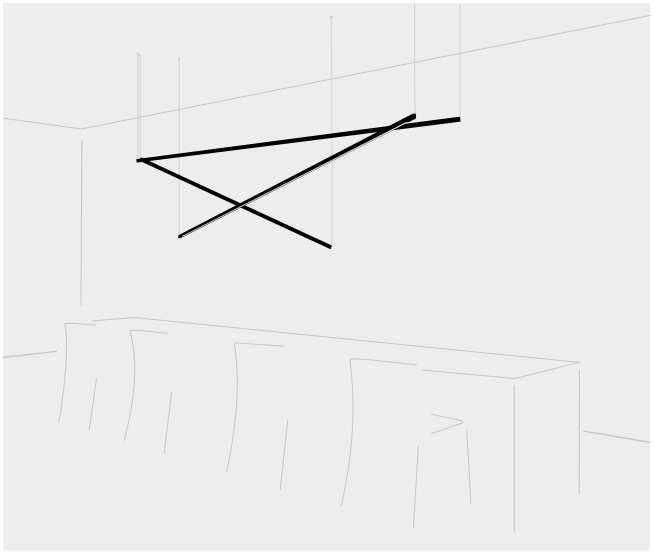

STI015
Sketch composed by two compositions.


Composition 1:
2 Sticks: 1 x 150 cm, 1 x 300 cm. Total 4,5 m.
LED 2700 K. 9779 lm. 79,2 W.
Built-in disc S canopy. 1-10V.

Composition 2:
1 Stick: 1 x 300 cm. Total 3 m.
LED 2700 K. 6519 lm. 52,8 W.
Built-in disc S canopy. 1-10V.

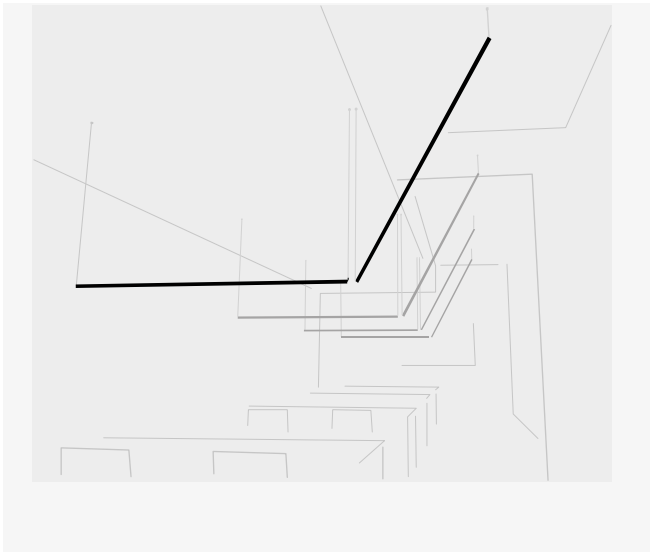


STI021
Sketch composed by four identical compositions.

Each composition:
2 Sticks: 2 x 200 cm. Total 4 m.
LED 4000 K. 9496 lm. 140,8 W.
Built-in disc S canopy. 1-10V.

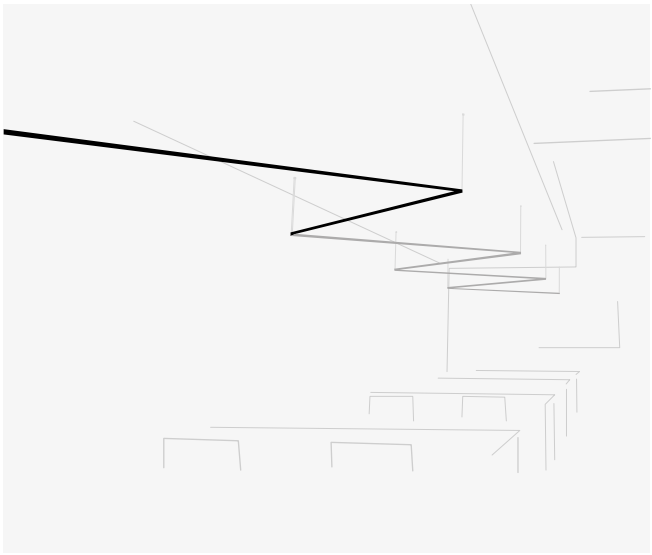


STI025
Sketch composed by four identical compositions.

Each composition:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 4000 K. 14244 lm. 105,6 W.
Built-in disc S canopy. 1-10V.

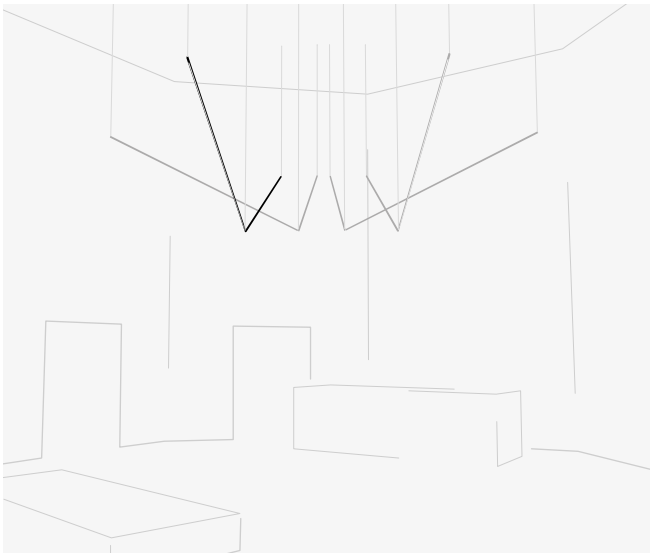


STI035
Sketch composed by four identical compositions.

Each composition:
2 Sticks: 1 x 300 cm, 1 x 150 cm. Total 4,5 m.
LED 4000 K. 10683 lm. 79,2 W.
Built-in disc S canopy. 1-10V.

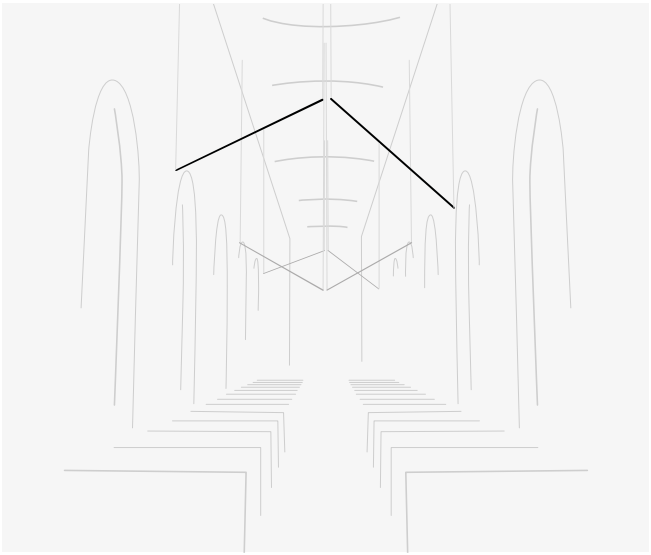

STI041
Sketch composed by three identical compositions.

Each composition:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 4000 K. 14244 lm. 105,6 W.
Built-in disc S canopy. 1-10V.

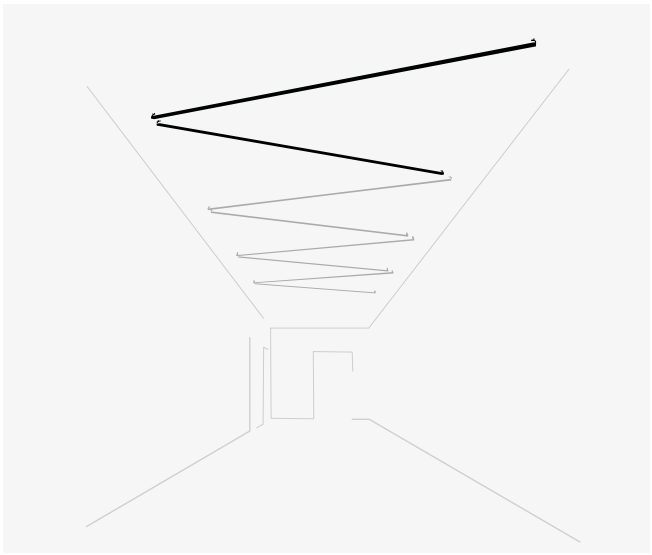


STI085
Sketch composed by four identical compositions.

Each composition:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 4000 K. 14244 lm. 105,6 W.
Remote driver Built-in Micro. 1-10V.

Sticks Connectable

Next sketches are composed by one or more compositions


Some sticks are attached to the Wall

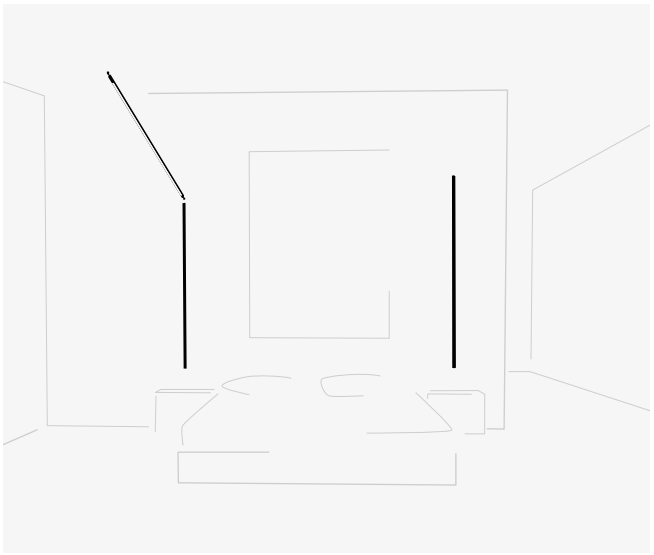

STI051
Sketch composed by two compositions.


Composition 1:
2 Sticks: 2 x 150 cm. Total 3 m.
LED 2700 K. 6520 lm. 52,8 W.
Floor base & plug. Push.

Composition 2:
1 Stick: 1 x 200 cm. Total 2 m.
LED 2700 K. 4346 lm. 35,2 W.
Floor base & plug. Push.

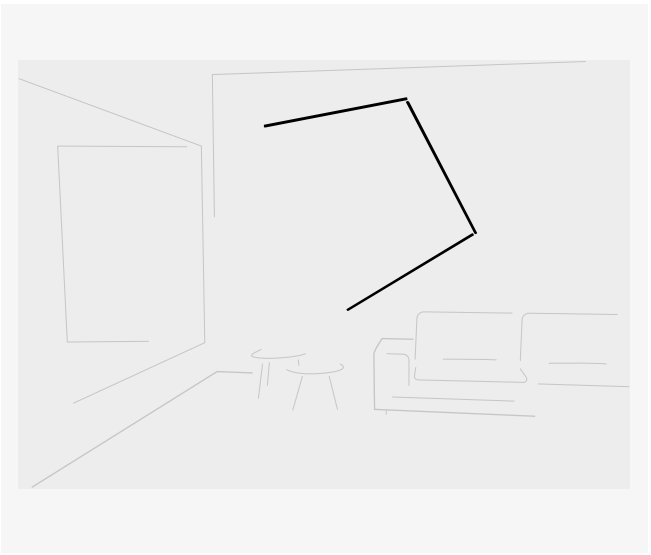


STI055
Sketch composed by only one composition.

3 Sticks: 3 x 150 cm. Total 4,5 m.
LED 2700 K. 9780 lm. 79,2 W.
Floor base & plug. Push.

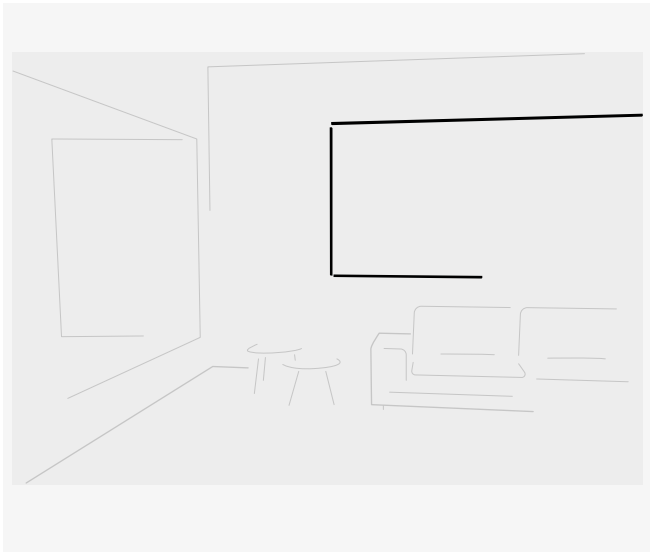


STI061
Sketch composed by only one composition.

3 Sticks: 2 x 150 cm, 1 x 300 cm. Total 6 m.
LED 2700 K. 13039 lm. 105,6 W.
Floor base & plug. Push.

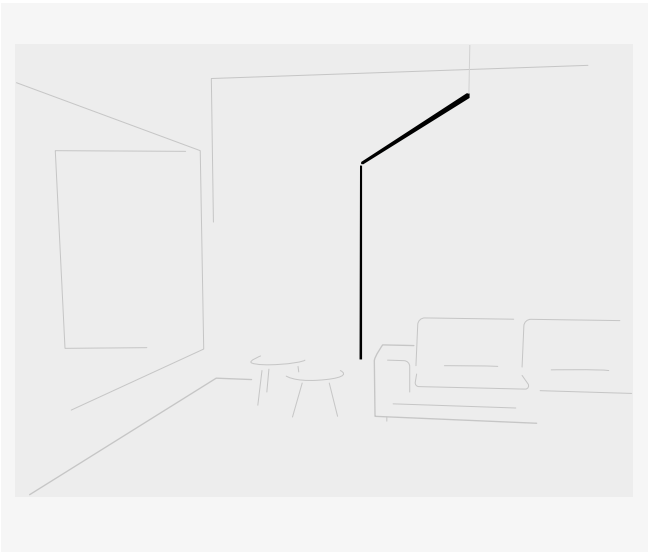


STI065
Sketch composed by only one composition.

2 Sticks: 2 x 150 cm. Total 3 m.
LED 2700 K. 6520 lm. 52,8 W.
Floor base & plug. Push.

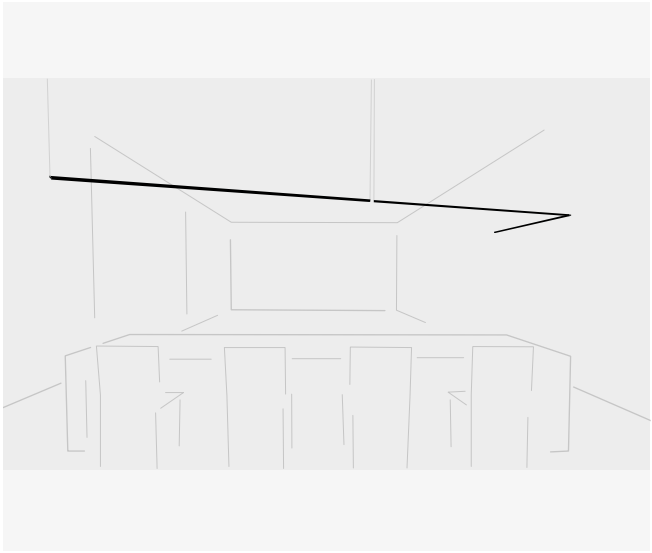


STI071
Sketch composed by only one composition.

3 Sticks: 1 x 150 cm, 2 x 200 cm. Total 5,5 m.
LED 2700 K. 11952 lm. 96,8 W.
Floor base & plug. Push.

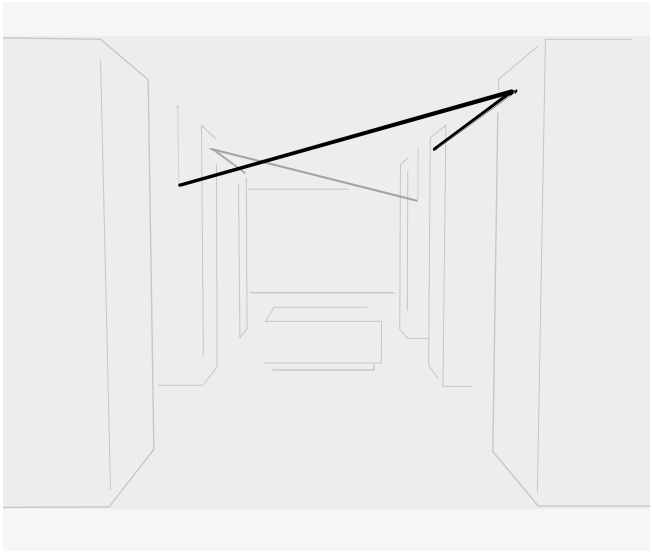

STI075
Sketch composed by two identical compositions.


Each composition:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 4000 K. 14244 lm. 105,6 W.
Remote driver Built-in Micro. 1-10V.

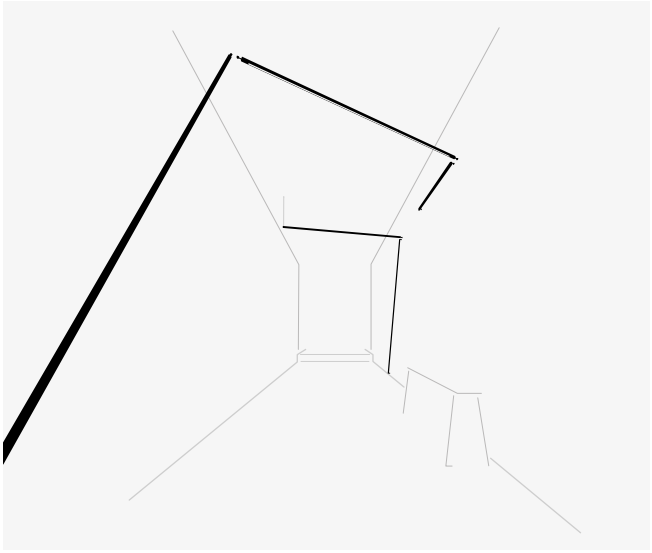

STI081
Sketch composed by two compositions.

Composition 1:
3 Sticks: 1 x 150 cm, 1 x 200 cm, 1 x 300 cm. Total 6,5 m.
LED 4000 K. 15431 lm. 114,4 W.
Remote driver Built-in Micro. 1-10V.

Composition 2:
2 Sticks: 1 x 300 cm, 1 x 200 cm. Total 5 m.
LED 4000 K. 11870 lm. 88 W.
Remote driver Built-in Micro. 1-10V.

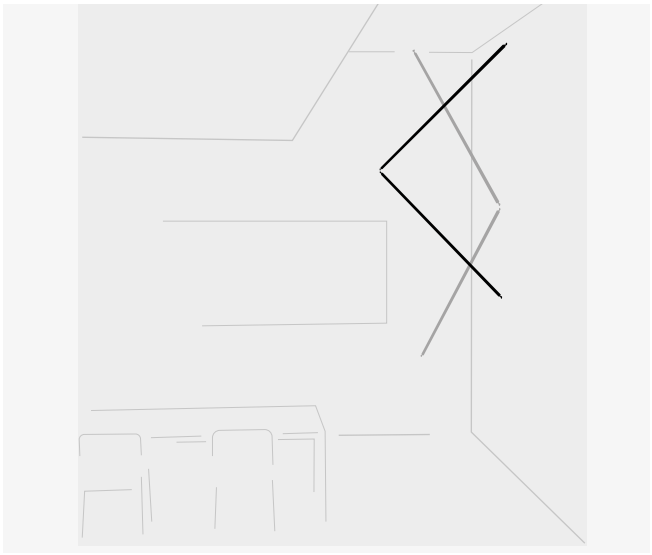


STI091
Sketch composed by two identical compositions.

Each composition:
2 Sticks: 2 x 200 cm. Total 4 m.
LED 2700 K. 8692 lm. 70,4 W.
Remote driver Built-in Micro. 1-10V.

Sticks Connectable


Next sketches are composed by one or more compositions

Some sticks are attached to the Wall

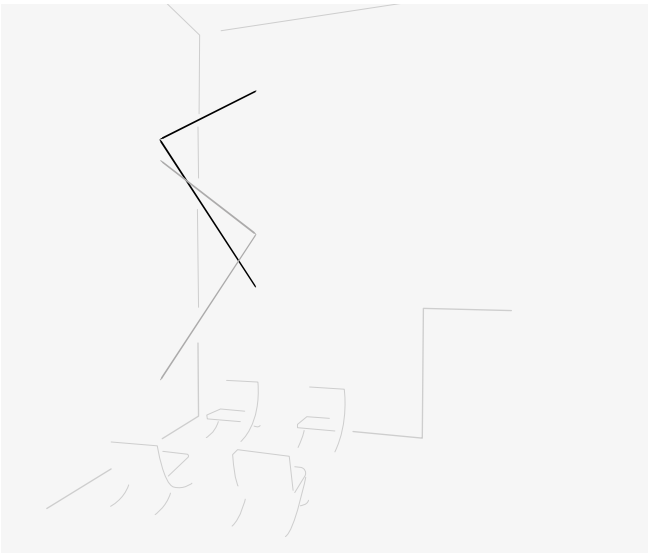

STI095
Sketch composed by two identical compositions.


Each composition:
2 Sticks: 1 x 200 cm, 1 x 300 cm. Total 5 m.
LED 4000 K. 11870 lm. 88 W.
Remote driver Built-in Micro. 1-10V.

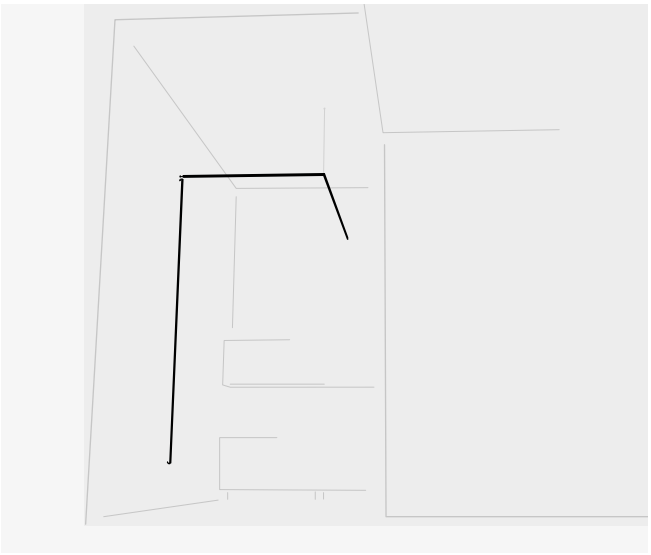

STI101
Sketch composed by two compositions.


Composition 1:
2 Sticks: 1 x 300 cm, 1 x 150 cm. Total 4,5 m.
LED 2700 K. 9779 lm. 79,2 W.
Remote driver Built-in Micro. 1-10V.

Composition 2:
1 Stick: 1 x 300 cm. Total 3 m.
LED 2700 K. 6519 lm. 52,8 W.
Remote driver Built-in Micro. 1-10V.

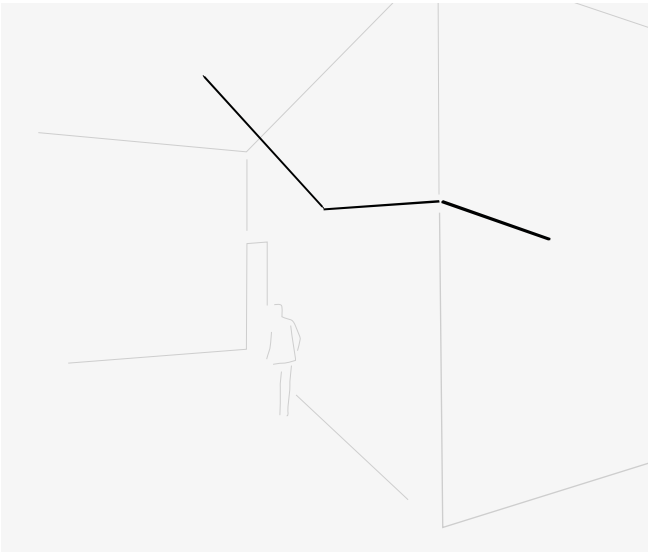


STI105
Sketch composed by only one composition.

3 Sticks: 2 x 150 cm, 1 x 200 cm. Total 5 m.
LED 4000 K. 11870 lm. 88 W.
Floor base & plug. Push.

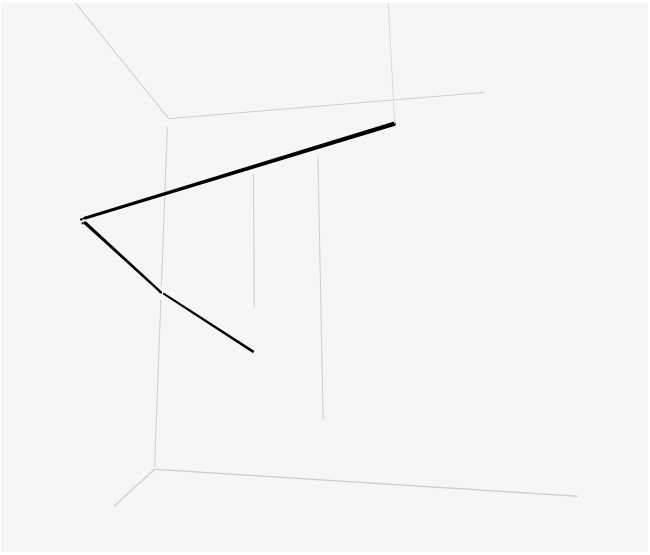


STI111
Sketch composed by only one composition.

3 Sticks: 2 x 150 cm, 1 x 300 cm. Total 6 m.
LED 4000 K. 14244 lm. 105,6 W.
Remote driver Built-in Micro. 1-10V.

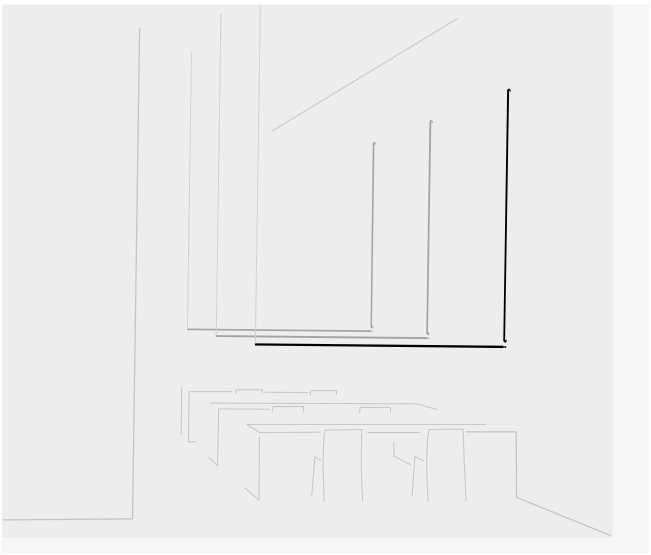

STI115
Sketch composed by three identical compositions.

Each composition:
2 Sticks: 2 x 200 cm. Total 4 m.
LED 4000 K. 9496 lm. 70,4 W.
Built-in disc S canopy. 1-10V.

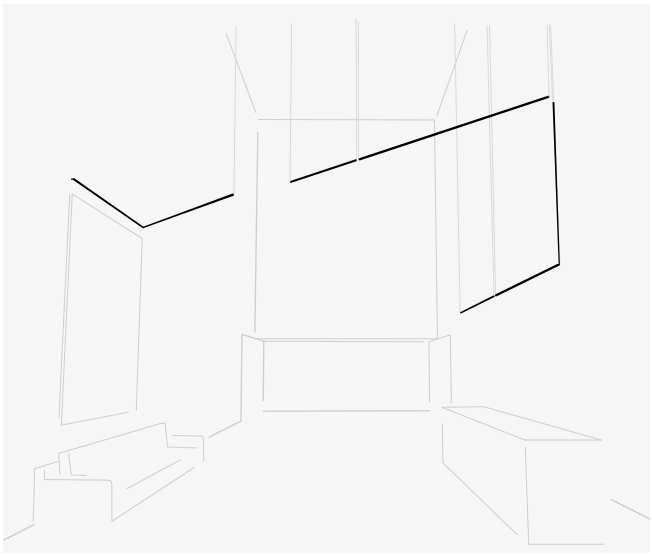


STI131
Sketch composed by four compositions.

Composition 1:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 4000 K. 14244 lm. 105,6 W.
Remote driver Built-in Micro. 1-10V.

Composition 2:
1 Stick: 1 x 150 cm. Total 1,5 m.
LED 4000 K. 3561 lm. 26,4 W.
Remote driver Built-in Micro. 1-10V.

Composition 3:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 4000 K. 14244 lm. 105,6 W.
Remote driver Built-in Micro. 1-10V.

Composition 4:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 4000 K. 14244 lm. 105,6 W.
Remote driver Built-in Micro. 1-10V.

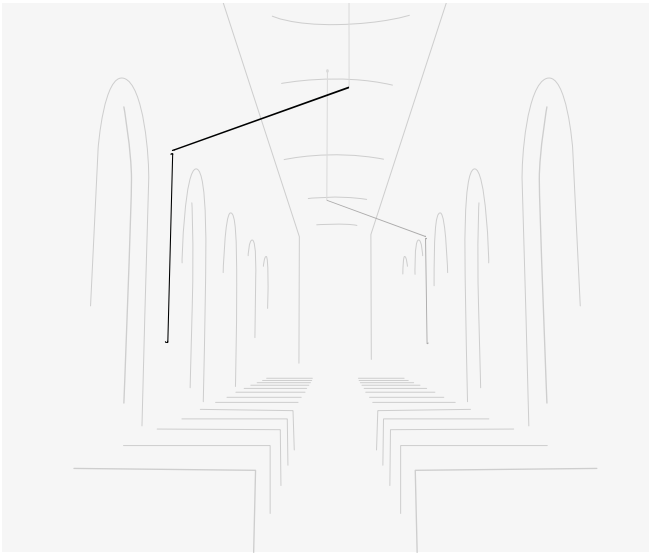


STI141
Sketch composed by two identical compositions.

Each composition:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 4000 K. 14244 lm. 105,6 W.
Built-in disc S canopy. 1-10V.

Sticks Connectable

Next sketches are composed by one or more compositions


Some sticks are attached to the Wall

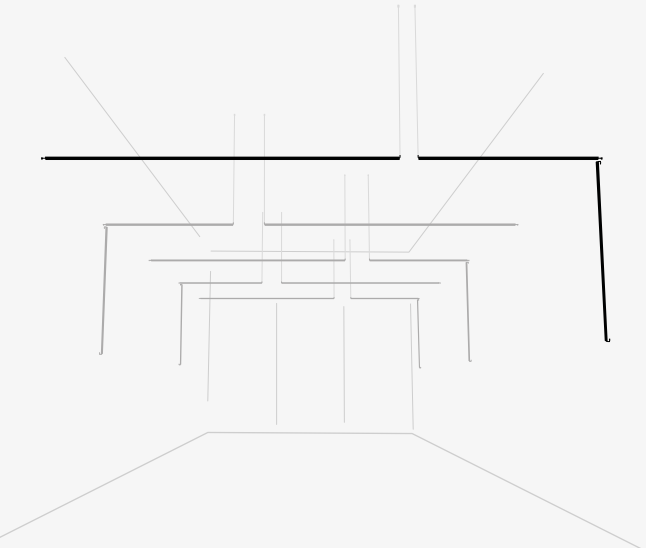

STI145
Sketch composed by five identical compositions.

Each composition:
3 Sticks: 1 x 300 cm, 2 x 150 cm . Total 6 m.
LED 4000 K. 14244 lm. 105,6 W.
Remote driver Built-in Micro. 1-10V


Some sticks are on the Floor

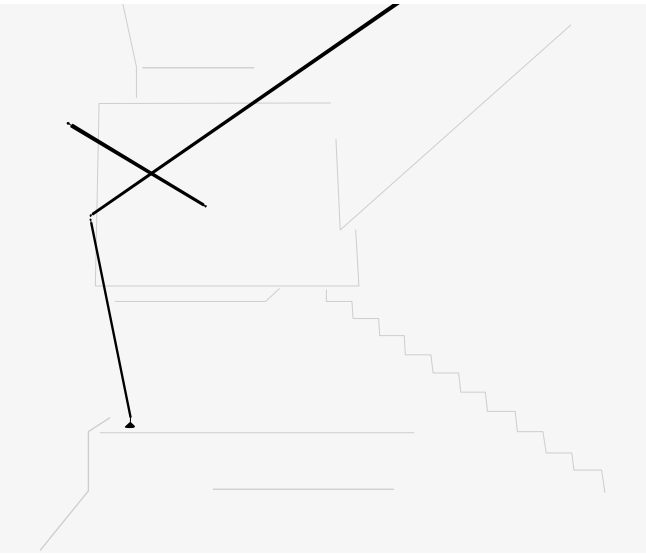

STI151
Sketch composed by two compositions.


Composition 1:
1 Stick: 1 x 150 cm. Total 1,5 m.
LED 2700 K. 3260 lm. 26,4 W.
Remote driver Built-in Micro. 1-10V.

Composition 2:
2 Sticks: 1 x 200 cm, 1 x 300 cm. Total 5 m.
LED 2700 K. 10865 lm. 88 W.
Remote driver Built-in Micro. 1-10V.

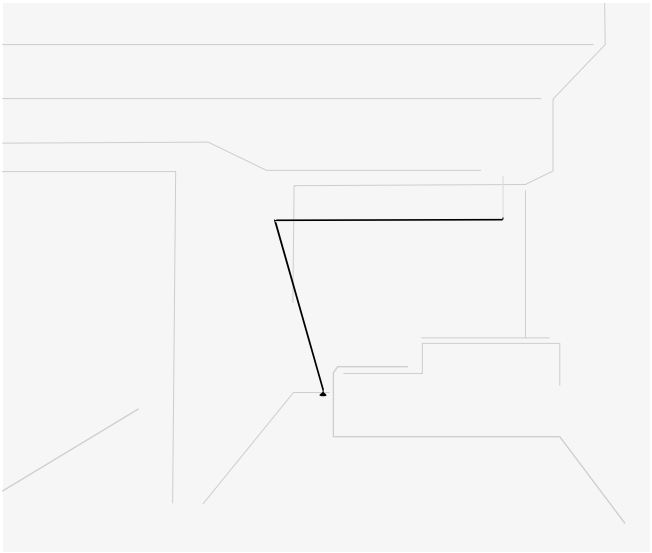

STI155
Sketch composed by only one composition.


2 Sticks: 2 x 300 cm. Total 6 m.
LED 4000 K. 14244 lm. 105,6 W.
Floor base & plug. Push.

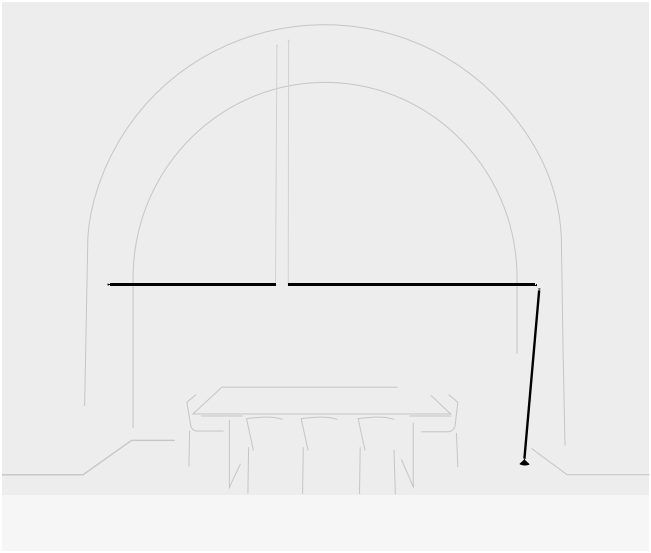

STI161
Sketch composed by two compositions.


Composition 1:
1 Stick: 1 x 200 cm. Total 2 m.
LED 2700 K. 4336 lm. 35,2 W.
Remote driver Built-in Micro. 1-10V.

Composition 2:
2 Sticks: 1 x 300 cm, 1 x 200 cm. Total 5 m.
LED 2700 K. 10865 lm. 88 W.
Remote driver Built-in Micro. 1-10V.

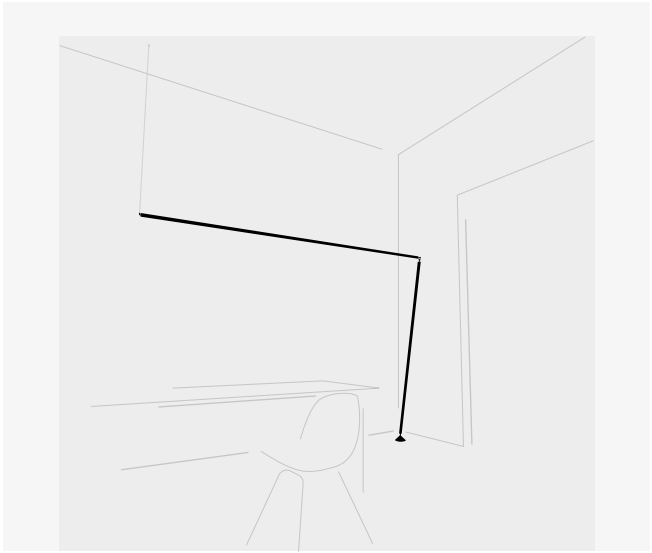

STI165
Sketch composed by only one composition.


2 Sticks: 1 x 300 cm, 1 x 200 cm. Total 5 m.
LED 2700 K. 10865 lm. 88 W.
Floor base & plug. Push.

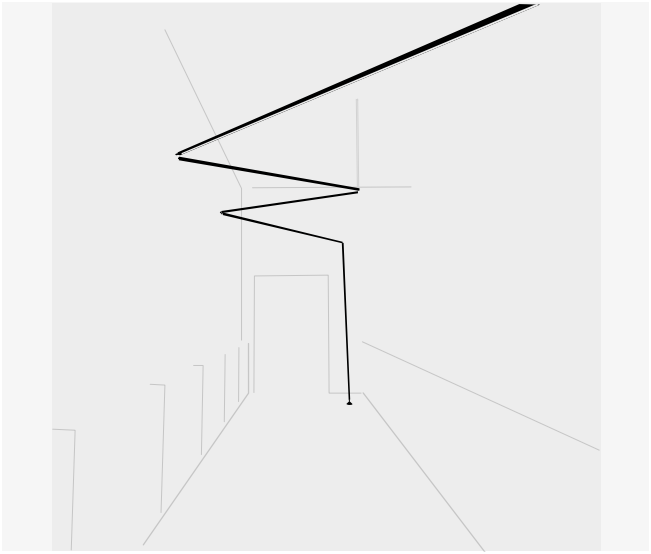

STI171
Sketch composed by two compositions.

Composition 1:
3 Sticks: 3 x 200 cm. Total 6 m.
LED 4000 K. 14244 lm. 105,6 W.
Surface canopy. 1-10V.

Composition 2:
2 Sticks: 1 x 200 cm, 1 x 300 cm. Total 5 m.
LED 4000 K. 11870 lm. 88 W.
Surface canopy. 1-10V.

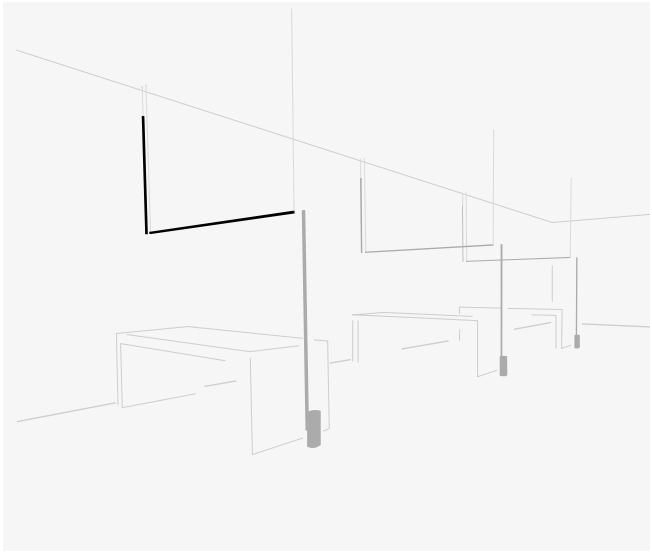

STI175
Sketch composed by three identical compositions.

Each composition:
2 Sticks: 1 x 150 cm, 1 x 200 cm. Total 3,5 m.
LED 4000 K. 8309 lm. 61,6 W.
Surface canopy. 1-10V.



Each project is unique.
Visit vibia.com and chose among
multiple compositions designed
and adapted to your project needs.

Personalize your own Sticks composition
quick and easy at vibia.com.

Sticks Connectable

Elements to be configurated

Wall-Wall / Ceiling-Ceiling
Wall-Wall (corner) / Wall-Ceiling
Wall-Pendants
Pendants-Pendants
Pendants-Ceiling
Pendants

Sticks 1,5 m.
7300 7310 7320 7330 7350

LED temperature colour

/1 _ 2700 K E
CRI >90 3260 lm 123 lm/W
/2 _ 3000 K E
CRI >90 3510 lm 133 lm/W
/4 _ 4000 K E
CRI >90 3561 lm 134 lm/W

1 x LED STRIP 26,4 W 24V

Net weight 0,9 Kg.

Sticks 2 m.
7303 7313 7323 7333 7353

LED temperature colour

/1 _ 2700 K F
CRI >90 4346 lm 123 lm/W
/2 _ 3000 K F
CRI >90 4680 lm 133 lm/W
/4 _ 4000 K F
CRI >90 4748 lm 134 lm/W

1 x LED STRIP 35,2 W 24V

Net weight 1,2 Kg.

Sticks 3 m.
7306 7316 7326 7336 7356

LED temperature colour

/1 _ 2700 K E
CRI >90 6519 lm 123 lm/W
/2 _ 3000 K E
CRI >90 7020 lm 133 lm/W
/4 _ 4000 K E
CRI >90 7122 lm 134 lm/W

1 x LED STRIP 52,8 W 24V

Net weight 1,8 Kg.

Sticks: Aluminum.
Diffuser: Polycarbonate.

Driver and **Dimming** depends on selected installation accesory (see page 375).

Suspension cables up to 3m. for
Wall - Pendants and Pendants-Pendants.

Personalisation options available
- Extra cable length for Wall - Pendants and Pendants - Pendants.
Min. quantity, upcharge and extra lead time apply.

11 Black
(NCS S 8500-N)

LED IP20 Dimmer



Horizontal Pendants version with a UGR index <19 available.
Request more information.

Floor-Wall

Sticks 1,5 m.
7340

LED temperature colour

/1 _ 2700 K F
CRI >90 3260 lm 123 lm/W
/2 _ 3000 K F
CRI >90 2644 lm 100,15 lm/W
/4 _ 4000 K F
CRI >90 3561 lm 134 lm/W

1 x LED STRIP 26,4 W 24V

Net weight 1,5 Kg.

Sticks 2 m.
7343

LED temperature colour

/1 _ 2700 K F
CRI >90 4346 lm 123 lm/W
/2 _ 3000 K F
CRI >90 2644 lm 100,15 lm/W
/4 _ 4000 K F
CRI >90 4748 lm 134 lm/W

1 x LED STRIP 35,2 W 24V

Net weight 1,8 Kg.

Sticks 3 m.
7306 7316 7326 7336 7356

LED temperature colour

/1 _ 2700 K F
CRI >90 6519 lm 123 lm/W
/2 _ 3000 K F
CRI >90 5288 lm 100,15 lm/W
/4 _ 4000 K F
CRI >90 7122 lm 134 lm/W

1 x LED STRIP 52,8 W 24V

Net weight 2,4 Kg.

Sticks: Aluminum.
Diffuser: Polycarbonate.

Driver and **Dimming** depends on selected installation accesory (see page 375).

11 Black
(NCS S 8500-N)

LED IP20 Dimmer

Electrical connection options



Floor base & plug




Surface canopy



Built-in disc S



Remote driver Built-in Micro



Floor base & plug
ACST000001 ACST000002


Driver Constant Voltage 24V.
200~240V. 50/60Hz.
Dimming: Push.

Materials
Body: Steel.

Packaging
1 Box.
0,16 x 0,16 x 0,4 m.
Vol. 0,01 m³.
Gross weight 8,5 Kg.
Net weight 7 Kg.

11 Black
(NCS S 8500-N)

IP20 CE Dimmer



Surface canopy
ACST000003 ACST000004

Driver Constant Voltage 24V.
90~305V. 50/60Hz.
Dimming: 1-10V.


Personalisation options available
- Dimming: DALI, Casambi.
Min. quantity, upcharge and extra lead time apply.
To be installed on ceiling or wall.

Materials
Body: Steel.

Packaging
1 Box.
0,50 x 0,25 x 0,25 m.
Vol. 0,03 m³.
Gross weight 2,9 Kg.
Net weight 2,5 Kg.

11 Black
(NCS S 8500-N)

IP20 CE Dimmer Multi-volt



Built-in disc S
ACST000005 ACST000006

Driver Constant Voltage 24V.
90~305V. 50/60Hz.
Dimming: 1-10V.


Personalisation options available
- Dimming: DALI, Casambi.
Min. quantity, upcharge and extra lead time apply.
To be installed on ceiling or wall.

Materials
Body: Steel.

Packaging
1 Box.
0,25 x 0,25 x 0,25 m.
Vol. 0,01 m³.
Gross weight 1,8 Kg.
Net weight 1,5 Kg.

11 Black
(NCS S 8500-N)

IP20 CE Dimmer Multi-volt



Remote driver Built-in Micro
ACST000007 ACST000008

Driver Constant Voltage 24V.
90~305V. 50/60Hz.
Dimming: 1-10V.

Personalisation options available
- Dimming: DALI, Casambi.
Min. quantity, upcharge and extra lead time apply.
To be installed on ceiling or wall.

Materials
Body: Aluminum.

Packaging
1 Box.
0,25 x 0,25 x 0,25 m.
Vol. 0,01 m³.
Gross weight 1,8 Kg.
Net weight 1,5 Kg.

11 Black
(NCS S 8500-N)

IP20 CE Dimmer Multi-volt

Sticks Stand-alone

Design by Arik Levy

Fusing technology, space, and architecture, Sticks offers a creative toolkit for integrating light elements in an interior. Pure and graphic, the minimalist aluminum rods transform linear light into floating sculpture.

Floor




7338 **7339** **7348**





7338

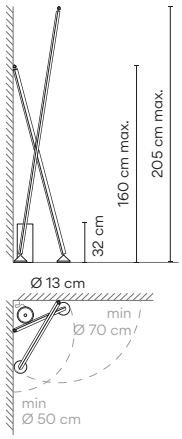

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED temperature colour
/1 _ 2700 K F
CRI >90 7606 lm 123 lm/W
/2 _ 3000 K F
CRI >90 7606 lm 123 lm/W
/4 _ 4000 K F
CRI >90 8309 lm 134 lm/W

Control
7338 _ _ **/** _ **5**
Push


Materials
Sticks: Aluminum.
Diffuser: Polycarbonate.

Light Source and electronics
1 x LED STRIP 26,4 W 24V
1 x LED STRIP 35,2 W 24V
Constant Voltage 24V
200~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0414 m³
Gross weight 14,2 Kg Net weight 9,7 Kg

LED IP20 Dimmer

7339

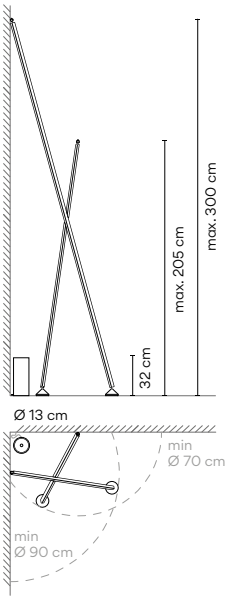

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED temperature colour
/1 _ 2700 K F
CRI >90 10865 lm 123 lm/W
/2 _ 3000 K F
CRI >90 7606 lm 123 lm/W
/4 _ 4000 K F
CRI >90 11870 lm 134 lm/W

Control
7339 _ _ **/** _ **5**
Push


Materials
Sticks: Aluminum.
Diffuser: Polycarbonate.

Light Source and electronics
1 x LED STRIP 35,2 W 24V
1 x LED STRIP 52,8 W 24V
Constant Voltage 24V
200~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,057 m³
Gross weight 16,6 Kg Net weight 10,6 Kg

LED IP20 Dimmer

7348



Finishes
11/ _ _ Black
(NCS S 8500-N)

LED temperature colour
/1 _ 2700 K F
CRI >90 4346 lm 123 lm/W
/2 _ 3000 K F
CRI >90 3511 lm 133 lm/W
/4 _ 4000 K F
CRI >90 4748 lm 134 lm/W

Control
7348 _ _ **/** _ **5**
Push

Materials
Sticks: Aluminum.
Diffuser: Polycarbonate.

Light Source and electronics
1 x LED STRIP 35,2 W 24V
Constant Voltage 24V
200~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0166 m³
Gross weight 8,8 Kg Net weight 8,4 Kg


LED IP20 Dimmer

Musa

Design by Note Design Studio

Delicate elegance.
It explores the delicacy of nature
which is both strong and powerful,
in a poetic expression of light.

Table Wall




ø 26 cm

7400



ø 26 cm


7402 7404



ø 26 cm

7415

7400



Finishes

- **36/** _ _ Soft Pink (NCS S 1010-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **93/** _ _ White (RAL 9016)

Finish customization
(Available options:
Vibia colour palette)

LED temperature colour

/1 _ 2700 K F
CRI >90 449 lm 100 lm/W

Control

7400 _ _ **/** _ **5**
Push

Materials

Diffuser: Blown glass.
Body: Aluminum.

Light Source and electronics

1 x LED 4,5 W 350 mA
Constant Voltage 24V
100~240V 50/60Hz

Packaging


1 Box 0,17 x 0,32 x 0,3 m
Vol 0,0163 m³
Gross weight 1,3 Kg Net weight 0,85 Kg

Notes

Dimmer switch on the base.
Electric cable with plug. 3 m

LED IP20 EAC
Bi-volt Dimmer

7402



Finishes

- **36/** _ _ Soft Pink (NCS S 1010-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **93/** _ _ White (RAL 9016)

Finish customization
(Available options:
Vibia colour palette)

LED temperature colour

/1 _ 2700 K F
CRI >90 449 lm 100 lm/W

Control

7402 _ _ **/** _ **5**
Push

Materials

Diffuser: Blown glass.
Body: Aluminum.

Light Source and electronics

1 x LED 4,5 W 350 mA
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,17 x 0,32 x 0,3 m
Vol 0,0163 m³
Gross weight 1,3 Kg Net weight 0,85 Kg

Notes

Dimmer switch on the base.
Electric cable with plug. 3 m

LED IP20 EAC
Bi-volt Dimmer

Product specifications subject to change without notice. Please check vibia.com for updated information.


7404

Finishes
- **36/** _ _ Soft Pink (NCS S 1010-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **93/** _ _ White (RAL 9016)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour
/1 _ 2700 K G
CRI >90 157 lm 105 lm/W

Control
7404 _ _ **/** _ **5**
Push



Materials
Diffuser: Blown glass.
Body: Aluminum.

Light Source and electronics
1 x LED 1,5 W 500 mA
Constant Voltage 5V
100~240V 50/60Hz

Packaging
1 Box 0,17 x 0,32 x 0,3 m
Vol 0,0163 m³
Gross weight 1,4 Kg Net weight 0,95 Kg

Notes
Portable version with batery.
Dimmer switch on the base. 3 step dimming.
Electric cable with plug. 3 m.
Battery life: from 6 to 18 hours
(depending on intensity).

LED IP20 CE EAC
Bi-volt Li-ion


7415

Finishes
- **36/** _ _ Soft Pink (NCS S 1010-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **93/** _ _ White (RAL 9016)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour
/1 _ 2700 K F
CRI >90 449 lm 100 lm/W

Control
7415 _ _ **/** _ **3**
1-10V



Materials
Diffuser: Blown glass.
Body: Aluminum.

Light Source and electronics
1 x LED 4,5 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
1 Box 0,17 x 0,32 x 0,3 m
Vol 0,0163 m³
Gross weight 1,8 Kg Net weight 1,3 Kg

LED IP20 CE EAC



Knit


Design by Meike Harde

Form, materiality and tangibility collide with the Knit collection.
Its texture is magnetic, calling out for us to touch its surface, to feel its warmth and to keep it close. Light seeps outwards through the fabric and downwards through a translucent screen, softening its luminosity.

Pendants



7450



Finishes

24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED temperature colour

/1 _ 2700 K E
CRI >90 7470 lm 133,9 lm/W

Control

7450 _ _ **/** _ **1**
DALI

7450 _ _ **/** _ **3**
1-10V

7450 _ _ **/** _ **Z**
Casambi

Electrical connection

Surface
_18 Free Wire
_23 Built-in
_31 Remote Micro
for plaster ceilings
_32 Remote XXS
for all types of drop ceilings

Materials

Fabric shade: Polyester flame retardant.
Shade: Polyethylene. Difuser: Methacrylate.
Difuser ring: ABS.

Light Source and electronics

6 x LED 5,9W 350 mA
Constant Current 1050 mA
110~240V 50/60Hz

Packaging

1 Box 0,55 x 0,55 x 0,65 m
Vol 0,196 m³
Gross weight 6 Kg Net weight 3,7 Kg

Notes

Extra cable length.

LED ☐ IP20 CE EAC Bi-volt


Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 10 /1A _18

Model
Finish
LED temperature colour
Control
Electrical connection
Only for pendants



7455



Finishes

24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED temperature colour

/1 _ 2700 K E
CRI >90 7470 lm 133,9 lm/W

Control

7455 _ _ **/** _ **1**
DALI

7455 _ _ **/** _ **3**
1-10V

7455 _ _ **/** _ **Z**
Casambi

Materials
Fabric shade: Polyester flame retardant.
Shade: Polyethylene. Difuser: Methacrylate.
Difuser ring: ABS.

Light Source and electronics
6 x LED 5,9W 350 mA
Constant Current 1050 mA
110~240V 50/60Hz

Packaging
1 Box 0,54 x 0,54 x 0,41 m
Vol 0,119 m^3
Gross weight 5,9 Kg Net weight 3,2Kg

Notes
Extra cable length.


LED □ IP20 CE EAC Bi-volt

Electrical connection

Surface
_18 Free Wire
_23 Built-in
_31 Remote Micro
for plaster ceilings
_32 Remote XXS
for all types of drop ceilings

1160 | 10 | /1 | A | _18
Model
Finish
LED temperature colour
Control
Electrical connection
Only for pendants

7460



Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED temperature colour
/1 _ 2700 K E
CRI >90 7470 lm 133,9 lm/W

Control
7460 _ _ **/** _ **1**
DALI

7460 _ _ **/** _ **3**
1-10V

7460 _ _ **/** _ **Z**
Casambi

Materials
Fabric shade: Polyester flame retardant
Shade: Polyethylene Difuser: Methacrylate.
Difuser ring: ABS.

Light Source and electronics
6 x LED 5,9W 350 mA
Constant Current 1050 mA
110~240V 50/60Hz


Packaging
1 Box 0,54 x 0,54 x 0,41 m
Vol 0,119 m³
Gross weight 5,2 Kg Net weight 3,4Kg

Notes
Extra cable length.

LED IP20 EAC Bi-volt

Electrical connection
Surface
_18 Free Wire
_23 Built-in
_31 Remote Micro
for plaster ceilings
_32 Remote XXS
for all types of drop ceilings

7470



Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED temperature colour
/1 _ 2700 K E
CRI >90 7470 lm 133,9 lm/W

Control
7470 _ _ **/** _ **1**
DALI

7470 _ _ **/** _ **3**
1-10V

7470 _ _ **/** _ **Z**
Casambi

Materials
Fabric shade: Polyester flame retardant.
Shade: Polyethylene Difuser: Methacrylate.
Difuser ring: ABS.

Light Source and electronics
6 x LED 6,7W 400 mA
Constant Current 1200 mA
110~240V 50/60Hz


Packaging
1 Box 0,59 x 0,78 x 0,78m
Vol 0,358 m³
Gross weight 9Kg Net weight 5,5Kg

Notes
Extra cable length.

LED IP20 EAC Bi-volt

Electrical connection
Surface
_18 Free Wire
_23 Built-in
_31 Remote Micro
for plaster ceilings
_32 Remote XXS
for all types of drop ceilings

7475



Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED temperature colour
/1 _ 2700 K E
CRI >90 7470 lm 133,9 lm/W

Control
7475 _ _ **/** _ **1**
DALI

7475 _ _ **/** _ **3**
1-10V

7475 _ _ **/** _ **Z**
Casambi

Materials
Fabric shade: Polyester flame retardant
Shade: Polyethylene Difuser: Methacrylate.
Difuser ring: ABS.

Light Source and electronics
6 x LED 6,7W 400 mA
Constant Current 1200 mA
110~240V 50/60Hz

Packaging
1 Box 0,80 x 0,80 x 0,77m
Vol 0,492 m³
Gross weight 9,5Kg Net weight 6Kg

Notes
Extra cable length.

LED IP20 EAC Bi-volt

Electrical connection
Surface
_18 Free Wire
_23 Built-in
_31 Remote Micro
for plaster ceilings
_32 Remote XXS
for all types of drop ceilings

Product specifications subject to change without notice. Please check vibia.com for updated information.



Electrical connection options for models 7450 / 7455 / 7460 / 7470 / 7475

Choose your preferred installation option accordingto your needs.
For each composition, the optimal minimum number of drivers will be delivered.

Drop ceiling

The innovative remote and built-in fittings accentuate the silkiness and lightness of compositions on suspended ceilings, its great visual grandeur taking center stage.

For Ref. 7450 / 7455 / 7460 / 7470 / 7475

Remote



Micro ø 3 cm
height 7 cm
for plaster ceilings.
Black finish.





XXS ø 6 cm
height 6 cm
for all types of drop ceilings. Match with fixture finish.

Built-in



ø 8 cm
height 6 cm
match with fixture finish.







Regular ceiling

When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.

For Ref. 7450 / 7455 / 7460 / 7470 / 7475


Surface




ø 16 cm

match with fixture finish.


Free Wire



ø 22 cm





ø 36 cm



ø 40 cm


you can choose the finish of the canopy among black, white or any colour matching one of the pendants.









Floor

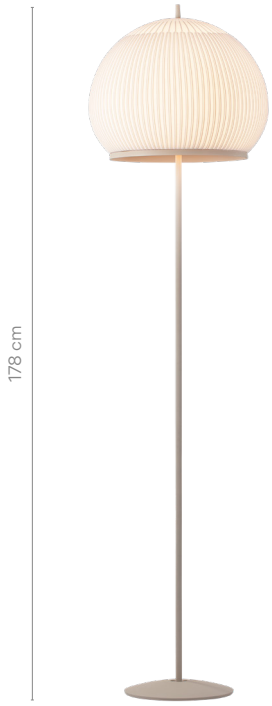

7480

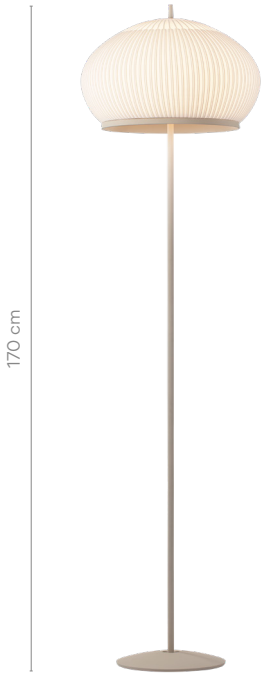

7485

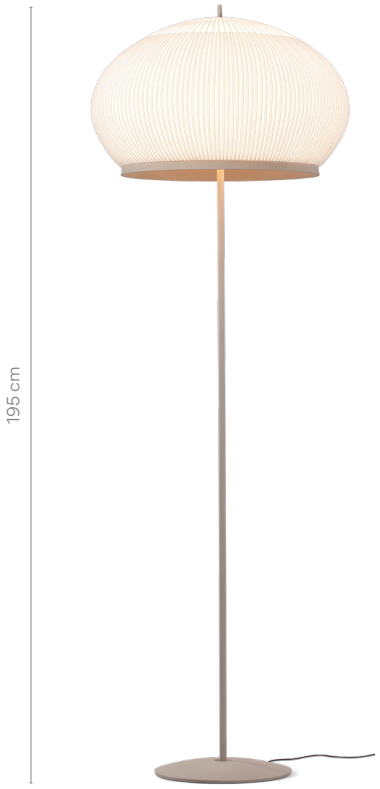

7487



7490




7492



7494

 Product specifications subject to change without notice. Please check vibia.com for updated information.

7480



Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED temperature colour
/1 _ 2700 K E
CRI >90 4740 lm 133,9 lm/W

Control
7480 _ _ **/** _ **5**
Push

7480 _ _ **/** _ **Z**
Casambi

Materials
Fabric shade: Textile. Shade: Polyethylene.
Difuser: Methacrylate. Difuser ring: ABS Tube: Iron steel.
Base: Zamak.


Light Source and electronics
6 x LED 5,9W 350 mA
Constant Voltage 42V 1,43mA
110~240V 50/60Hz

Packaging
2 Boxes
Box 1: 0,54 x 0,54 x 0,41 m
Box 2: 1,71 x 0,38 x 0,36 m
Total Vol. 0,353 m³
Gross weight 21,9 Kg Net weight 11,3 Kg

Notes
Electric cable 2,5 m

LED IP20 EAC Bi-volt

7485



Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED temperature colour
/1 _ 2700 K E
CRI >90 4740 lm 133,9 lm/W

Control
7485 _ _ **/** _ **5**
Push

7485 _ _ **/** _ **Z**
Casambi

Materials
Fabric shade: Textile. Shade: Polyethylene.
Difuser: Methacrylate. Difuser ring: ABS Tube: Iron stee.l
Base: Zamak.


Light Source and electronics
6 x LED 5,9W 350 mA
Constant Voltage 42V 1,43mA
110~240V 50/60Hz

Packaging
2 Boxes
Box 1: 0,54 x 0,54 x 0,41 m
Box 2: 1,71 x 0,38 x 0,36m
Total Vol. 0,353m³
Gross weight 21,5Kg Net weight 10,8Kg

Notes
Electric cable 2,5 m

LED IP20 EAC Bi-volt

7487



Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED temperature colour
/1 _ 2700 K E
CRI >90 4740 lm 133,9 lm/W

Control
7487 _ _ **/** _ **5**
Push

7487 _ _ **/** _ **Z**
Casambi

Materials
Fabric shade: Textile. Shade: Polyethylene.
Difuser: Methacrylate. Difuser ring: ABS Tube: Iron steel.
Base: Zamak.

Light Source and electronics
6 x LED 5,9W 350 mA
Constant Voltage 42V 1,43 mA
110~240V 50/60Hz

Packaging
2 Boxes
Box 1: 0,78 x 0,78 x 0,59 m
Box 2: 1,93 x 0,45 x 0,46 m
Total Vol. 0,7579 m³
Gross weight 30 Kg Net weight 18,5 Kg

Notes
Electric cable 2,5 m

LED IP20 EAC Bi-volt

7490

Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED temperature colour
/1 _ 2700 K E
CRI >90 4740 lm 133,9 lm/W

Control
7490 _ _ **/** _ **5**
Push

7490 _ _ **/** _ **Z**
Casambi

ø 45 cm



Materials
Fabric shade: Textile Shade: Polyethylene.
Difuser: Methacrylate. Difuser ring: ABS.
Suport: ABS.

Light Source and electronics
6 x LED 5,9 W 350 mA
Constant Voltage 42V 1,43 mA
110~240V 50/60Hz

Packaging
1 Box 0,65 x 0,55 x 0,55 m
Vol 0,196 m³
Gross Weight 5,4 Kg Net Weight 3,3 Kg

Notes
Electric cable 2,5 m

LED □ IP20 CE EAC Bi-volt

7492


Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED temperature colour
/1 _ 2700 K E
CRI >90 4740 lm 133,9 lm/W

Control
7492 _ _ **/** _ **5**
Push

7492 _ _ **/** _ **Z**
Casambi

ø 65 cm



Materials
Fabric shade: Textile. Shade: Polyethylene.
Difuser: Methacrylate. Difuser ring: ABS.
Suport: ABS.

Light Source and electronics
6 x LED 5,9 W 350 mA
Constant Voltage 42V 1,43 mA
110~240V 50/60Hz

Packaging
1 Box 0,78 x 0,78 x 0,59 m
Vol 0,358 m³
Gross Weight 7,3 Kg Net Weight 4,5 Kg

Notes
Electric cable 2,5 m

LED □ IP20 CE EAC Bi-volt

7494


Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED temperature colour
/1 _ 2700 K E
CRI >90 4740 lm 133,9 lm/W

Control
7494 _ _ **/** _ **5**
Push

7494 _ _ **/** _ **Z**
Casambi

ø 65 cm



Materials
Fabric shade: Textile. Shade: Polyethylene.
Difuser: Methacrylate. Difuser ring: ABS.
Suport: ABS.

Light Source and electronics
6 x LED 5,9 W 350 mA
Constant Voltage 42V 1,43 mA
110~240V 50/60Hz

Packaging
1 Box 0,80 x 0,80 x 0,75 m
Vol 0,48 m³
Gross weight 9,3 Kg Net weight 5,9 Kg

Notes
Electric cable 2,5 m

LED □ IP20 CE EAC Bi-volt

1160 | 10 | /1 | A

Model
Finish
LED temperature colour
Control



Set


Design by Xuclà


A game of light, shadows and volumes, Set is a new concept of modular wall sconces that composes light as art onto the walls. During the day Set decorates the wall with a pattern of rectangular elements, but once illuminated it creates a surprising feature of lights, shadows and volumes.




Each project is unique. Visit vibia.com
and chose among multiple compositions
designed and adapted to your project needs.


Personalise your own Set composition
quick and easy at vibia.com

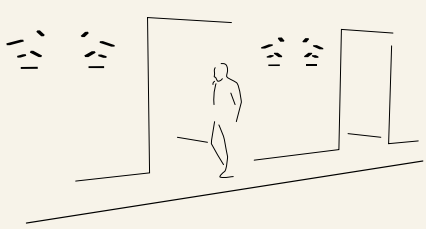




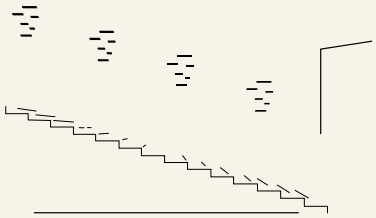

7753 x 3




7753 x 3




7750 x 1, 7751 x 3, 7752 x 1



7760 x 1, 7761 x 1, 7762 x 2,
7763 x 1, 7764 x 1



7749



Finishes
- **59/** _ _ Mink (PANTONE 407)
- **93/** _ _ White (RAL 9003)

LED temperature colour
/1 _ 2700 K D
CRI >90 1269 lm 141 lm/W

Control
7749 _ _ **/** _ **2**
0-10V

Materials
Body: Aluminum. Diffuser: Borosilicate glass.
Lid: Polycarbonate.


Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,67 Kg Net weight 0,52 Kg

Notes
LED placed on the lower element.
Small

LED IP20 EAC Bi-volt

7750



Finishes
- **59/** _ _ Mink (PANTONE 407)
- **93/** _ _ White (RAL 9003)

LED temperature colour
/1 _ 2700 K D
CRI >90 1269 lm 141 lm/W

Control
7750 _ _ **/** _ **2**
0-10V

Materials
Body: Aluminum. Diffuser: Borosilicate glass.
Reflector body: Foamed PVC. Lid: Polycarbonate.


Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,15 x 0,132 x 0,36 m
Vol 0,0071 m³
Gross weight 0,95 Kg Net weight 0,8 Kg

Notes
LED placed on the lower element.
Small

LED IP20 EAC Bi-volt

7751



Finishes
- **59/** _ _ Mink (PANTONE 407)
- **93/** _ _ White (RAL 9003)

LED temperature colour
/1 _ 2700 K D
CRI >90 1269 lm 141 lm/W

Control
7751 _ _ **/** _ **2**
0-10V

Materials
Body: Aluminum. Diffuser: Borosilicate glass.
Reflector body: Foamed PVC. Lid: Polycarbonate.


Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,15 x 0,132 x 0,36 m
Vol 0,0071 m³
Gross weight 1,25 Kg Net weight 1,1 Kg

Notes
LED placed on the lower element.
Small

LED IP20 EAC Bi-volt

7752



Finishes
- **59/** _ _ Mink (PANTONE 407)
- **93/** _ _ White (RAL 9003)

LED temperature colour
/1 _ 2700 K D
CRI >90 1269 lm 141 lm/W

Control
7752 _ _ **/** _ **2**
0-10V

Materials
Body: Aluminum. Diffuser: Borosilicate glass.
Reflector body: Foamed PVC. Lid: Polycarbonate.


Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,15 x 0,132 x 0,36 m
Vol 0,0071 m³
Gross weight 1,6 Kg Net weight 1,4 Kg

Notes
LED placed on the lower element.
Small

LED IP20 EAC Bi-volt

7753



Finishes
- **59/** _ _ Mink (PANTONE 407)
- **93/** _ _ White (RAL 9003)

LED temperature colour
/1 _ 2700 K D
CRI >90 1269 lm 141 lm/W

Control
7753 _ _ **/** _ **2**
0-10V

Materials
Body: Aluminum. Diffuser: Borosilicate glass.
Reflector body: Foamed PVC. Lid: Polycarbonate.


Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,15 x 0193 x 0,36 m
Vol 0,0100 m³
Gross weight 2 Kg Net weight 1,5 Kg

Notes
LED placed on the lower element.
Small

LED IP20 CE EAC Bi-volt

7759



Finishes
- **59/** _ _ Mink (PANTONE 407)
- **93/** _ _ White (RAL 9003)

LED temperature colour
/1 _ 2700 K D
CRI >90 1269 lm 141 lm/W

Control
7759 _ _ **/** _ **2**
0-10V

Materials
Body: Aluminum. Diffuser: Borosilicate glass.
Lid: Polycarbonate.


Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,75 Kg Net weight 0,6 Kg

Notes
LED placed on the lower element.
Big.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

7760



Finishes
- **59/** _ _ Mink (PANTONE 407)
- **93/** _ _ White (RAL 9003)

LED temperature colour
/1 _ 2700 K D
CRI >90 1269 lm 141 lm/W

Control
7760 _ _ **/** _ **2**
0-10V

Materials
Body: Aluminum. Diffuser: Borosilicate glass.
Reflector body: Foamed PVC. Lid: Polycarbonate.


Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,15 x 0,132 x 0,36 m
Vol 0,0071 m³
Gross weight 1,4 Kg Net weight 1,1 Kg

Notes
LED placed on the lower element.
Big.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

7761



Finishes
- **59/** _ _ Mink (PANTONE 407)
- **93/** _ _ White (RAL 9003)

LED temperature colour
/1 _ 2700 K D
CRI >90 1269 lm 141 lm/W

Control
7761 _ _ **/** _ **2**
0-10V

Materials
Body: Aluminum. Diffuser: Borosilicate glass.
Reflector body: Foamed PVC. Lid: Polycarbonate.


Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,15 x 0,132 x 0,36 m
Vol 0,0071 m³
Gross weight 1,5 Kg Net weight 1,2 Kg

Notes
LED placed on the lower element.
Big.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

7762



Finishes
- **59/** _ _ Mink (PANTONE 407)
- **93/** _ _ White (RAL 9003)

LED temperature colour
/1 _ 2700 K D
CRI >90 1269 lm 141 lm/W

Control
7762 _ _ **/** _ **2**
0-10V

Materials
Body: Aluminum. Diffuser: Borosilicate glass.
Reflector body: Foamed PVC. Lid: Polycarbonate.


Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,15 x 0,193 x 0,36 m
Vol 0,0100 m³
Gross weight 1,9 Kg Net weight 1,9 Kg

Notes
LED placed on the lower element.
Big.
UNTIL STOCK RUNS OUT

LED IP20 EAC Bi-volt

7763



Finishes
- **59/** _ _ Mink (PANTONE 407)
- **93/** _ _ White (RAL 9003)

LED temperature colour
/1 _ 2700 K D
CRI >90 1269 lm 141 lm/W

Control
7763 _ _ **/** _ **2**
0-10V

Materials
Body: Aluminum. Diffuser: Borosilicate glass.
Reflector body: Foamed PVC. Lid: Polycarbonate.


Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,15 x 0,193 x 0,36 m
Vol 0,0100 m³
Gross weight 2,25 Kg Net weight 1,75 Kg

Notes
LED placed on the lower element.
Big.
UNTIL STOCK RUNS OUT

LED IP20 EAC Bi-volt

7764



Finishes
- **59/** _ _ Mink (PANTONE 407)
- **93/** _ _ White (RAL 9003)

LED temperature colour
/1 _ 2700 K D
CRI >90 1269 lm 141 lm/W

Control
7764 _ _ **/** _ **2**
0-10V

Materials
Body: Aluminum. Diffuser: Borosilicate glass.
Reflector body: Foamed PVC. Lid: Polycarbonate.

Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,15 x 0,193 x 0,36 m
Vol 0,0100 m³
Gross weight 2,75 Kg Net weight 2,25 Kg

Notes
LED placed on the lower element.
Big.
UNTIL STOCK RUNS OUT

LED IP20 EAC Bi-volt

1160 | 10 | /1 | A

Model
Finish
LED temperature colour
Control



Alpha

Design by Ramos & Bassols

An embedded light breaking free to serve.

Wall



ø 10,5 cm

7920



8 cm

7925



5 cm

7930



10,5 cm

7935



12 x 12 cm

7940 7942*




7955



14 x 24 cm

7950

7920



Finishes

- **03/** _ _ White and chrome (RAL 9016)
- **04/** _ _ Black and chrome (RAL 9005)
- **18/** _ _ Graphite and black (RAL 7016)
- **93/** _ _ White (RAL 9016)

LED temperature colour

/1 _ 2700 K G
CRI >90 181,2 lm 86 lm/W

Control

7920 _ _ **/** _ **0**
On/ Off

Materials

Box: Zamak. Diffuser: Polycarbonate.
Lid: Steel.

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

1 Box 0,13 x 0,20 x 0,21 m
Vol 0,0055 m^3
Gross weight 1 Kg Net weight 0,444 Kg

Notes


Surface.

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

7925



Finishes
- **03/** _ _ White and chrome (RAL 9016)
- **04/** _ _ Black and chrome (RAL 9005)
- **18/** _ _ Graphite and black (RAL 7016)
- **93/** _ _ White (RAL 9016)

LED temperature colour
/1 _ 2700 K G
CRI >90 181,2 lm 86 lm/W

Control
7925 _ _ **/** _ **0**
On/ Off

Materials
Box: Zamak. Diffuser: Polycarbonate.
Lid: Steel.


Light Source and electronics
1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
1 Box 0,13 x 0,21 x 0,20 m
Vol 0,0055 m³
Gross weight 1 Kg Net weight 0,32 Kg

Notes
Surface.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

7930



Finishes
- **03/** _ _ White and chrome (RAL 9016)
- **04/** _ _ Black and chrome (RAL 9005)
- **18/** _ _ Graphite and black (RAL 7016)
- **93/** _ _ White (RAL 9016)

LED temperature colour
/1 _ 2700 K G
CRI >90 181,2 lm 86 lm/W

Control
7930 _ _ **/** _ **0**
On/ Off

Materials
Box: Zamak. Diffuser: Polycarbonate.
Lid: Steel.


Light Source and electronics
2 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
1 Box 0,13 x 0,20 x 0,21 m
Vol 0,0055 m³
Gross weight 0,9 Kg Net weight 0,3 Kg

Notes
Surface.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

7935



Finishes
- **03/** _ _ White and chrome (RAL 9016)
- **04/** _ _ Black and chrome (RAL 9005)
- **18/** _ _ Graphite and black (RAL 7016)
- **93/** _ _ White (RAL 9016)

LED temperature colour
/1 _ 2700 K G
CRI >90 362,4 lm 86 lm/W

Control
7935 _ _ **/** _ **0**
On/ Off

Materials
Box: Zamak. Diffuser: Polycarbonate.
Lid: Steel.


Light Source and electronics
2 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
1 Box 0,13 x 0,20 x 0,21 m
Vol 0,0055 m³
Gross weight 0,9 Kg Net weight 0,3 Kg

Notes
Surface.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

7940



Finishes

- **03/** _ _ White and chrome (RAL 9016)
- **04/** _ _ Black and chrome (RAL 9005)
- **18/** _ _ Graphite and black (RAL 7016)
- **93/** _ _ White (RAL 9016)

LED temperature colour

/1 _ 2700 K G
CRI >90 181,22 lm 86 lm/W

Control

7940 _ _ **/** _ **0**
On/ Off

Materials

Diffuser: Polycarbonate. Lid: Zamak.
Body: Aluminum. Lid: Aluminum.

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging


1 Box 0,13 x 0,20 x 0,20 m
Vol 0,0055 m³
Gross weight 1,2 Kg Net weight 1 Kg

Notes

Surface
On/off switch on the front cover

LED IP20 CE EAC Bi-volt

7942



Finishes

- **03/** _ _ White and chrome (RAL 9016)
- **04/** _ _ Black and chrome (RAL 9005)
- **18/** _ _ Graphite and black (RAL 7016)
- **93/** _ _ White (RAL 9016)

LED temperature colour

/1 _ 2700 K G
CRI >90 181,22 lm 86 lm/W

Control

7942 _ _ **/** _ **0**
On/ Off

Materials

Diffuser: Polycarbonate. Lid: Zamak.
Body: Aluminum. Lid: Aluminum.

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

1 Box 0,13 x 0,20 x 0,20 m
Vol 0,0055 m³
Gross weight 1,2 Kg Net weight 1 Kg

Notes

Surface
Without switch

LED IP20 CE EAC Bi-volt



1160 | 10 | /1 | A


Model
Finish
LED temperature colour
Control

7950

Finishes
03/ _ _ White and chrome (RAL 9016)
04/ _ _ Black and chrome (RAL 9005)

LED temperature colour
/1 _ 2700 K G
CRI >90 543,6 lm 86 lm/W

Control
7950 _ _ **/** _ **0**
On/ Off



Materials
Diffuser: Polycarbonate. Lid: Zamak.
Body: Aluminum. Lid: Aluminum.

Light Source and electronics
3 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0175 m³
Gross weight 1,56 Kg Net weight 0,65 Kg

Notes
Surface
Light beam with no IR and UV.
UNTIL STOCK RUNS OUT


LED IP20 CE EAC Bi-volt

7955

Finishes
03/ _ _ White (RAL 9016)
04/ _ _ Black (RAL 9005)

LED temperature colour
/1 _ 2700 K G
CRI >90 543,6 lm 86 lm/W

Control
7955 _ _ **/** _ **0**
On/ Off



Materials
Diffuser: Polycarbonate. Lid: Zamak.
Body: Aluminum. Lid: Aluminum.

Light Source and electronics
3 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
1 Box 0,23 x 0,37 x 0,37 m
Vol 0,0310 m³
Gross weight 0,97 Kg Net weight 0,47 Kg

Notes
Surface
Light beam with no IR and UV.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt



Domo


Design by Ramos & Bassols

Featuring a classic cylinder silhouette, Domo offers refined lighting effect, combining diffusion and reflection. The understated, LED-powered fixture has clean lines and a spherical shape that seamlessly blends into the ceiling architecture.

Ceiling

8200

ø 18,5 cm




8201

ø 18,5 cm



8200



Finishes

03/ _ _ White
(RAL 9010)

LED temperature colour

/1 _ 2700 K G
CRI >90 543,66 lm 86 lm/W

/2 _ 3000 K F
CRI >90 489,6 lm 78 lm/W

/3 _ 3500 K G
CRI >90 393,6 lm 62,5 lm/W

Control

8200 _ _ **/** _ **0**
On / Off

8200 _ _ **/** _ **2**
0-10V

Materials

Diffuser: Polycarbonate.
Body: Aluminum.

Light Source and electronics

3 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz
/ _ **0:** On/Off, 100~240V Bi-volt
/ _ **2:** 0-10V, 100~277V Multi-volt

Packaging


1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0170 m³
Gross weight 1,7 Kg Net weight 1,2 Kg

Notes

Surface fitting.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

8201



Finishes

03/ _ _ White
(RAL 9010)

LED temperature colour

/1 _ 2700 K G
CRI >90 543,66 lm 86 lm/W

/2 _ 3000 K F
CRI >90 489,6 lm 78 lm/W

/3 _ 3500 K G
CRI >90 393,6 lm 62,5 lm/W

Control

8201 _ _ **/** _ **0**
On / Off

8201 _ _ **/** _ **2**
0-10V

Materials

Diffuser: Polycarbonate.
Body: Aluminum.

Light Source and electronics

3 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz
/ _ **0:** On/Off, 100~240V Bi-volt
/ _ **2:** 0-10V, 100~277V Multi-volt

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0170 m³
Gross weight 1,6 Kg Net weight 1,1 Kg

Notes

Surface fitting.
UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 | 10 | /1 | A

Model
Finish
LED temperature colour
Control



45°


Design by Víctor Carrasco

45° fixture features a customised composition of vertical tubes that create a sculptural effect overhead. Suspended from the ceiling like sleek stalagtites, they create an array of glowing accent lighting points.

Ceiling



8250



Finishes

03/ _ _ White
(RAL 9016)

04/ _ _ Black
(RAL 9005)

LED temperature colour

/1 _ 2700 K E
CRI >90 1352,27 lm 101 lm/W

/2 _ 3000 K E
CRI >90 662 lm 49 lm/W

/3 _ 3500 K F
CRI >90 1463,02 lm 109,18 lm/W

Control

8250 _ _ **/** _ **3**
1-10V

8250 _ _ **/** _ **5**
Push

Finishes

52/ _ _ Black oxide
(Satin bronze)

LED temperature colour

/1 _ 2700 K E
CRI >90 1352,27 lm 101 lm/W

/2 _ 3000 K E
CRI >90 662 lm 49 lm/W

/3 _ 3500 K F
CRI >90 1463,02 lm 109,18 lm/W

Control

8250 _ _ **/** _ **3**
1-10V

8250 _ _ **/** _ **5**
Push

Materials

Diffuser: Polycarbonate.
Tube: Aluminum.

Light Source and electronics

1 x LED 6,1 W 350 mA
Constant Current 350 mA
230V 50Hz

Packaging

1 Box 0,21 x 0,21 x 0,48 m
Vol 0,0211 m^3
Gross weight 2,1 Kg Net weight 1,15 Kg

Notes


Surface fitting.
It includes interchangeable diffusers, mink or orange finishes

UNTIL STOCK RUNS OUT

LED IP20 CE EAC

Product specifications subject to change without notice. Please check vibia.com for updated information.

8251



Finishes
- **03/** _ _ White (RAL 9016)
- **04/** _ _ Black (RAL 9005)

LED temperature colour
- **/1** _ 2700 K E
  CRI >90 1352,27 lm 101 lm/W
- **/2** _ 3000 K E
  CRI >90 662 lm 49 lm/W
- **/3** _ 3500 K F
  CRI >90 1463,02 lm 109,18 lm/W

Control
- **8251** _ _ **/** _ **B**
  1-10V, Push
- **8251** _ _ **/** _ **1**
  DALI

Finishes
- **52/** _ _ Black oxide (Satin bronze)

LED temperature colour
- **/1** _ 2700 K E
  CRI >90 1352,27 lm 101 lm/W
- **/2** _ 3000 K E
  CRI >90 662 lm 49 lm/W
- **/3** _ 3500 K F
  CRI >90 1463,02 lm 109,18 lm/W

Control
- **8251** _ _ **/** _ **B**
  1-10V, Push
- **8251** _ _ **/** _ **1**
  DALI

Materials
Diffuser: Polycarbonate.
Tube: Aluminum.

Light Source and electronics
1 x LED 6,1 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz


Packaging
1 Box 0,21 x 0,21 x 0,48 m
Vol 0,0326 m³
Gross weight 2,9 Kg Net weight 1,95 Kg

Notes
Surface fitting.
It includes interchangeable diffusers, mink or orange finishes

UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

8252



Finishes
- **03/** _ _ White (RAL 9016)
- **04/** _ _ Black (RAL 9005)

LED temperature colour
- **/1** _ 2700 K E
  CRI >90 1352,3 lm 101 lm/W
- **/2** _ 3000 K E
  CRI >90 662 lm 49 lm/W
- **/3** _ 3500 K F
  CRI >90 1463,02 lm 109,18 lm/W

Control
- **8252** _ _ **/** _ **B**
  1-10V, Push
- **8252** _ _ **/** _ **1**
  DALI

Finishes
- **52/** _ _ Black oxide (Satin bronze)

LED temperature colour
- **/1** _ 2700 K E
  CRI >90 1352,3 lm 101 lm/W
- **/2** _ 3000 K E
  CRI >90 662 lm 49 lm/W
- **/3** _ 3500 K F
  CRI >90 1463,02 lm 109,18 lm/W

Control
- **8252** _ _ **/** _ **B**
  1-10V, Push
- **8252** _ _ **/** _ **1**
  DALI

Materials
Diffuser: Polycarbonate.
Tube: Aluminum.

Light Source and electronics
1 x LED 6,1 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
1 Box 0,19 x 0,13 x 1,265 m
Vol 0,0312 m³
Gross weight 6,25 Kg Net weight 4,75 Kg

Notes
Surface fitting.
It includes interchangeable diffusers, mink or orange finishes


UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

Match

Design by Jordi Vilardell & Meritxell Vidal


Based on the principle of co-creation, Match is a lighting collection that can be fully customised virtually. Sculptural light structures arranged chaotically and adapted to fit into the room and the space available.

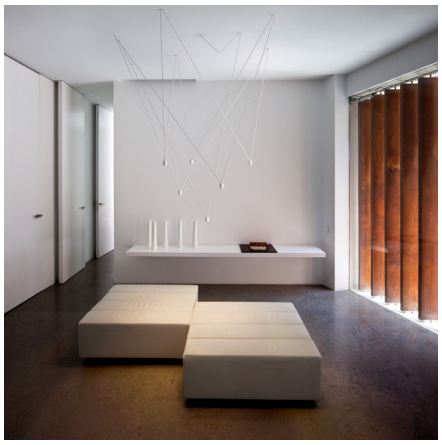







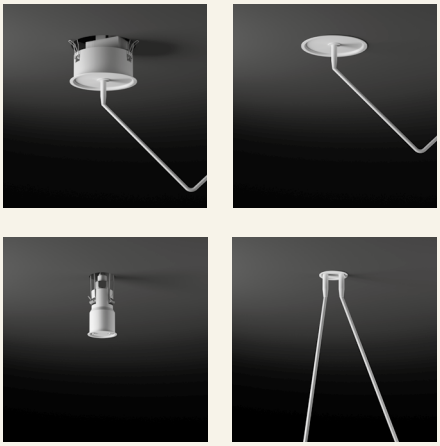

Built-in installation
-Electrical connection finials: the minimum height is 10 cm and the dimension of the cut-out is 10,5 cm.
-Nodes:the minimum height is 12 cm and the dimension of the cut-out is 4,5 cm.

Each project is unique. Visit vibia.com and chose among multiple compositions designed and adapted to your project needs.


Personalise your own Match composition quick and easy at vibia.com

It's necessary to make your personalized configuration on vibia.com to see prices and place orders.


Example 1:




Example 2:




Example 3:




Example 4:



Example 5:



Example 6:



Finishes

03/ _ _ White
(RAL 9010)

18/ _ _ Graphite
(RAL 7016)

LED temperature colour

/1 _ 2700 K G
CRI >80 199 lm 95 lm/W

Control

A
DALI-2, 1-10V, Push

Z
Casambi

Materials

Head: Aluminum. Canopy Plate: Steel.
Rods: Steel.

Light Source and electronics

LED 2,1 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Notes

Built-in

LED IP20 CE EAC Bi-volt

ø 4,5 cm ø 10,5 cm

PLACE ORDER ONLINE AT WWW.VIBIA.COM



Bulbs

LED		
900018.	LED G9 4,2W 2700K 470 lm.	
900100.	LED G9 230V 3,8W LED 2700 K 470 lm	
900102.	LED E27 230V 12W LED 2700 K 1520 lm	
900103.	LED E27 230V 9W 2700 K 800 lm	
900105.	LED E27 PAR30 230V 10W 2700 K 630 lm	
900106.	LED E14 230V 7W LED 2700 K 800 lm.	

Fluorescent tube		
900027.	G5 230V 24W (T5)	
900028.	G5 230V 39W (T5)	
900035.	2GX13 230V 55W (T5C)	
900070.	2GX13 230V 40W (T5C)	
900071.	2GX13 230V 22W (T5C)	
900072.	2GX13 230V 60W (T5C)	

Professional area at vibia.com

A new way of Working


We believe in cooperation and we bring you new ways to collaborate and online tools at vibia.com that we will help to work together efficiently. We propose a new way of working to have successful lighting projects.

Download all the information you need


Download and export all product information you need for your projects in one click:



Spec sheet




2D, 3D




Photometry




HD images

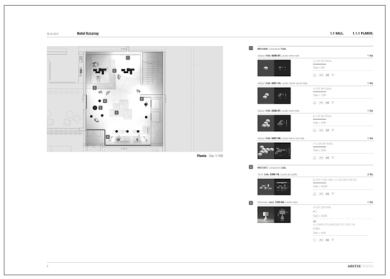


Project report



Budgets



Product configuration spec sheet



Installation instructions

Glossary

CE
Product complying with the EN60598-1 and EN60598-2-1 European regulation.

EAC
Product complying with TP TC 004/2011 and TP TC 020/2011. Custom Union Regulation

Product that complies with the law N24-09 of the current Moroccan legislation.

IP
Level of protection. Electrical products are prepared to avoid solids and liquids from getting in contact with the electrical parts. Such resistance is expressed as IP followed by two digits: the first digit indicates the level of resistance to solid objects and the second one to liquids.
The scale goes from IP20 to IP68.

IP20
Product protected against solid object as big as or bigger than 12 mm. No protection against water.

IP64
Dust-tight product. Protected against water spray.

IP65
Dust-tight product. Protected against water trickles.

IP66
Dust-tight product. Protected against water spurts.

Insulation class

Class I. Product with an additional protection cable (grounds).

Class II. Product protected against electric shock having a double insulation. No grounds.

Class III. Product protected against electric shock based on a very-low voltage system. No grounds.

Flammable surfaces

Product suitable to be installed on any kind of surface (EN 60598).

Product that CANNOT be in contact with normally-flammable materials (wood or others).

Bi-volt
Valid for the range 110V-230V, 50-60Hz.

Multi-volt
Valid for the range 110-277V, 50-60Hz.

Li-ion
Contains lithium-ion battery. Li-Ion battery must be disposed of into label containers, returned to special waste collection points or retailers of electrical equipment.

Cut out

Property for embedding dimension.

No electronic equipment included

The lamp does not include any electronic equipment (transformer, driver, ballast...).

Integrated Dimmer

Dimmer
Lamp that has a integrated dimmer.

EU Energetic label

More Efficacy
A
B
C
D
E
F
G
Less Efficacy

Light source information

CRI
Colour rendering index.

K
Colour temperature.


lm
Lumen, unit of measurement of luminous flux.

lm/W
Light source performance. Relationship between the luminous flux (lm) and the power consumed (W) by the source.


LED
LED included.

Lighting control systems


1 Push control

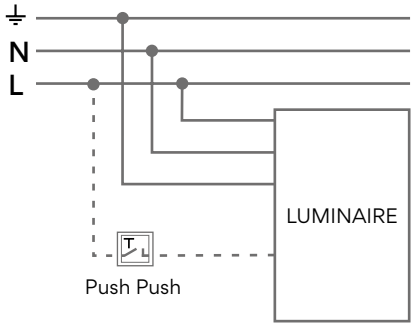


2 1-10V System control

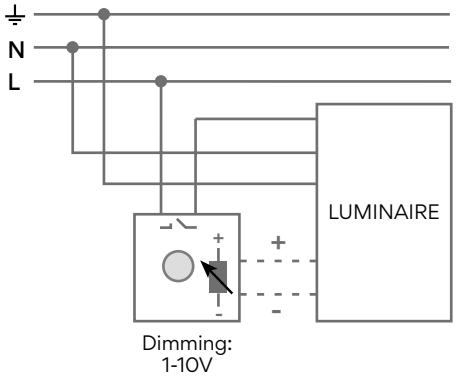


3 DALI System control

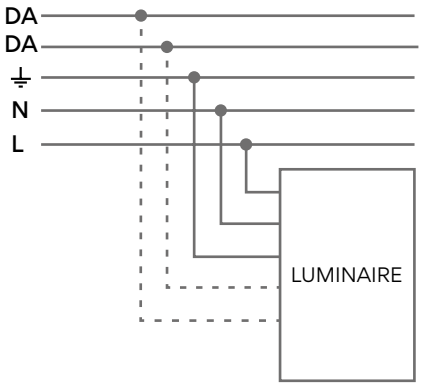

4 Casambi control

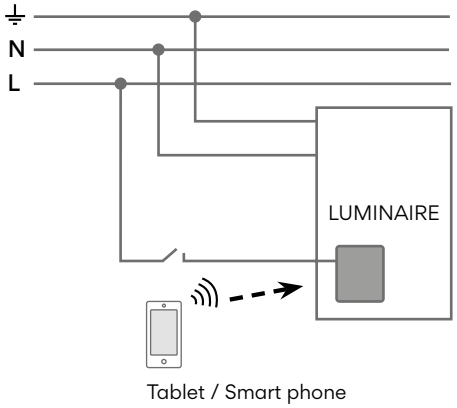

5 TRIAC control

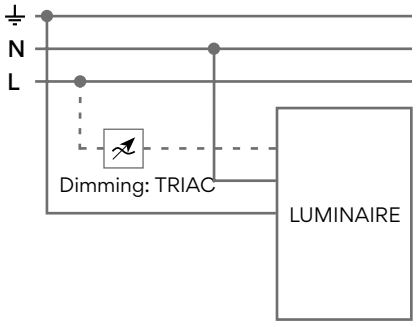

⏚	Ground
N	Neutral
L	Line
DA	DALI-Digital Signal

Very important
Vibia Lighting S.L.U. has the right to change any model or finish of the products included in the picture catalogue without any previous notice.

Vibia Lighting, S.L.U.

Office
Progrés 4-6.
08850 Gavà (Barcelona).
International Tel +34 934 796 971.

customer.service@vibia.com
vibia.com

COPYRIGHT© VIBIA LIGHTING S.L.U. ALL RIGHTS RESERVED.

vibia.com