

# °bloc line <sup>new</sup>

Bloc is now available as full length profile.  
Choose your down- and uplights.



# Wall




300, 600 mm  
or custom



# ° bloc.mono


materials aluminum coated / PC  
 weight from 0,5-5kg  
 voltage 110-230V  
 wattage 8,2W - 16,4W (high output)  
 power supply integrated in fixture  
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa

IP20   

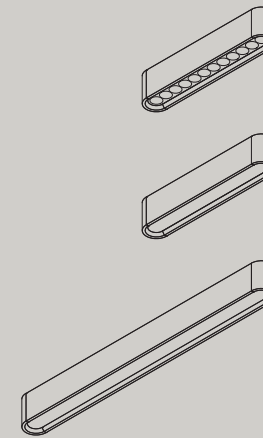


**Order Code**

- 20700.AA00.BBBB.CCC.DD bloc spot mono 300
- 20701.AA00.BBBB.CCC.DD bloc spot mono 300 high output
- 20702.AA00.BBBB.CCC.DD bloc mono stripe 300
- 20703.AA00.BBBB.CCC.DD bloc mono stripe 300 high output
- 20710.AA00.BBBB.CCC.DD bloc mono stripe 600
- 20711.AA00.BBBB.CCC.DD bloc mono stripe 600 high output

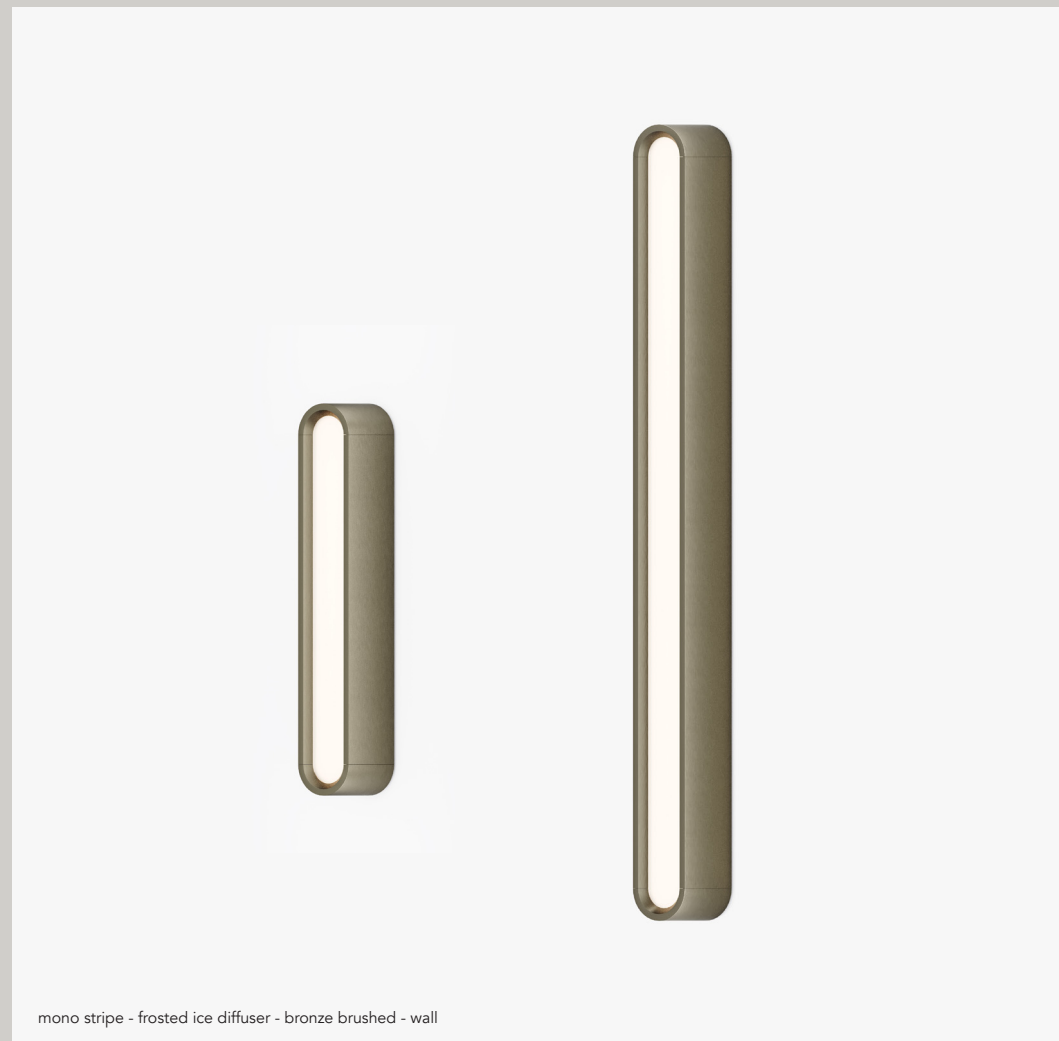

mono stripe - frosted ice diffuser - bronze brushed - wall

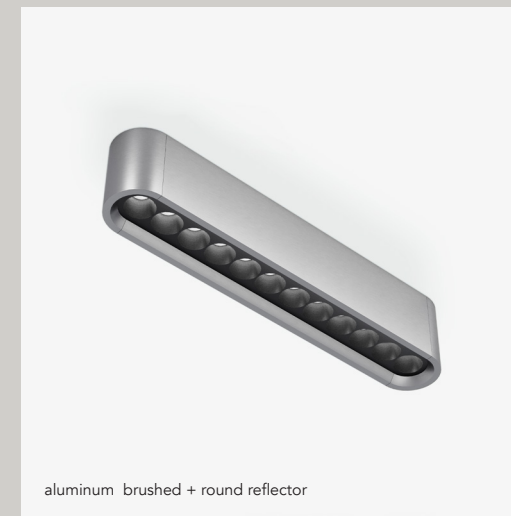

aluminum brushed + round reflector



bronze alu brushed + opal diffuser

<b>AA</b>	<b>Finish</b>		
01	black coated		
02	white coated		
21	black alu brushed		
22	aluminum brushed		
23	brass alu brushed		
25	bronze alu brushed		
26	dark bronze alu brushed		
<b>BBBB</b>	<b>Light</b>		
9527	cri >95, 2700K		
9530	cri >95, 3000K		
9540	cri >95, 4000K - on request		
<b>CCC</b>	<b>Optic</b>	<b>Output</b>	<b>High output*</b>
001	frosted ice diffuser	880lm - 310cd**	1610lm - 560cd**
002	microprism diffuser	780lm - 370cd**	1430lm - 680cd**
200	20 deg spots	1090lm - 5650cd	1870lm - 9770cd
300	30 deg spots	1055lm - 3310cd	1820lm - 5750cd
600	60 deg spots	1090lm - 1200cd	1870lm - 2060cd
<b>DD</b>	<b>Dimming</b>		
ND	no dimming		
DA	dali (0/1-10V, switchDIM, Casambi through interface)		
CA	casambi control		

\* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

\*\* For stripe 300

# °bloc.line

materials aluminum / PC  
 weight 3 kg/lm  
 voltage 48 Vdc or Powersupply 110-240V  
 wattage 8,2W - 16,4W (high output)  
 power supply integrated in fixture  
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google home & amazon Alexa

IP20   



## Order Code

**20803.AA00.BBBB.CCC.DD.EE** bloc line 1550 mm, 3 spots

**20830.AA00.BBBB.CCC.DD.EE** bloc line 1550 mm, diffuser

**20804.AA00.BBBB.CCC.DD.EE** bloc line 2150 mm, 4 spots

**20840.AA00.BBBB.CCC.DD.EE** bloc line 2150 mm, diffuser

**20805.AA00.BBBB.CCC.DD.EE** bloc line 2650 mm, 5 spots

**20850.AA00.BBBB.CCC.DD.EE** bloc line 2650 mm, diffuser

## Custom configuration on simple request

- AA Finish**
- 01 black
  - 02 white
  - 00 color custom
  - 21 black alu brushed
  - 22 natural alu brushed
  - 23 brass alu brushed
  - 25 bronze alu brushed
  - 26 dark bronze alu brushed

- 00 Suspension**
- 00 surface
  - 01 pendant


- BBBB Light**
- 9527 cri >95, 2700K
  - 9530 cri >95, 3000K
  - 9540 cri >95, 4000K - on request

- CCC Down Light**
- |     |                      |                        |
|-----|----------------------|------------------------|
| 001 | frosted ice diffuser | measurement in process |
| 002 | microprism diffuser  | measurement in process |
| 200 | 20 deg spots         | 1090lm - 5650cd/spot   |
| 300 | 30 deg spots         | 1055lm - 3310cd/spot   |
| 600 | 60 deg spots         | 1090lm - 1200cd/spot   |

- DD Dimming**
- ND no dimming
  - DA dali (0/1-10V, switchDIM, Casambi through interface)

- EE Up Light**
- 001 none
  - 002 uplight (same color light as downlight)

Values for 3000K. Color temperature influences the lumen output.  
 Download complete photometric data on our website.

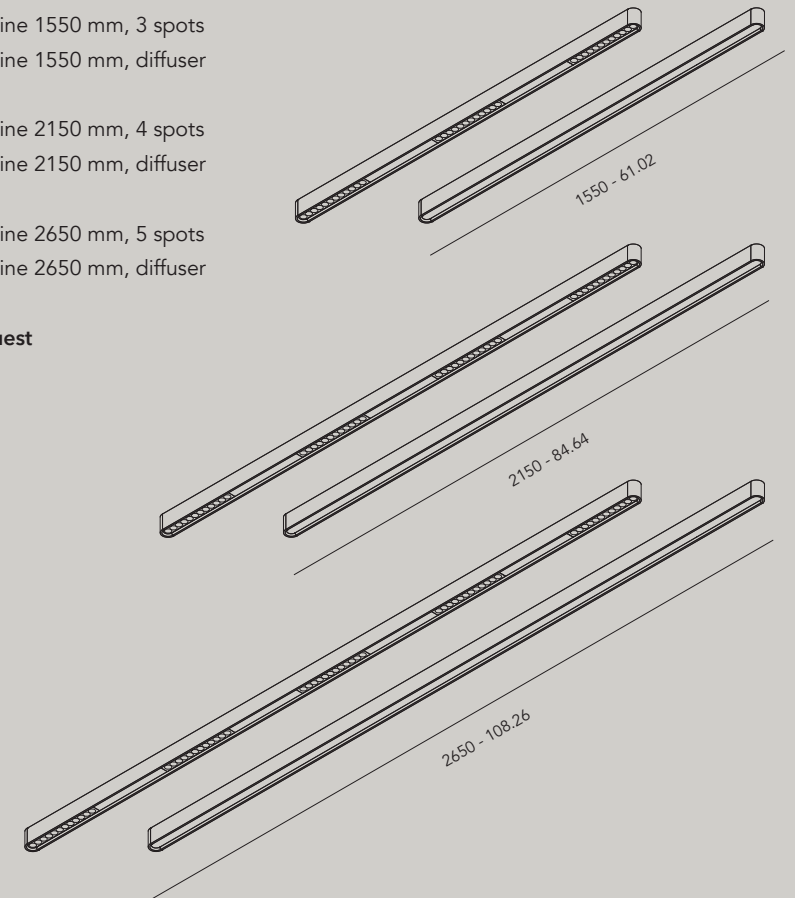

# ° ceiling caps



**91001.0100** Surface round ceiling cap - 90x26 mm - black  
**91001.0200** Surface round ceiling cap - 90x26 mm - white



**91002.0100** Surface flat round ceiling cap - 85x33 mm - black  
**91002.0200** Surface flat round ceiling cap - 85x33 mm - white



**91003.0100** Surface flat round small ceiling cap - 50x33 mm - black  
**91003.0200** Surface flat round small ceiling cap - 50x33 mm - white



**91004.0100**  
 Surface rectangle ceiling cap with suspension hole - 32x62x45 mm - black  
**91004.0200**  
 Surface rectangle ceiling cap with suspension hole - 32x62x45 mm - white




**91005.0100\***  
 Surface driver ceiling box - 435x42x32 mm - black  
**91005.0200\***  
 Surface driver ceiling box - 435x42x32 mm - white  
**91006.0100\***  
 Surface driver ceiling box, with hole for steel cable - 435x42x32 mm - black  
**91006.0200\***  
 Surface driver ceiling box, with hole for steel cable - 435x42x32 mm - white

\*powersupply or driver not included

# ° suspensions bloc

## Steel cable suspension surface (adjustment height at fixture)




Bloc line

**20256** Cylindrical nickle ceiling attachment with 1 mm steel cable - 2 m  
**20257** Cylindrical nickle ceiling attachment with 1 mm steel cable - 6 m



diam. 15mm x 21 mm

## Steel cable suspension recessed for plasterboard, wood, or similar (adjustment height at ceiling)



Bloc line

**20258** Steel zinc adjuster recessed 12 mm with 1 mm steel cable - 2 m  
**20259** Steel zinc adjuster recessed 12 mm with 1 mm steel cable - 6 m



diam. 12 mm

# °bloc

°bloc

105

The first linear lighting system available in a wide variety of high quality materials to offer a solution to your unique requirements.

Interchangeable °bloc units clip onto a surface mounted track.

Design by etre moderne



new

new







°bloc.stripe & °bloc white  
Interior Casa Vero - light design Jeune Concept









°bloc

113



°bloc.spot, bianco carrara & °bloc, oak with custom dye finish  
Apartment, Belgium - Rubens-Frederix architecten



°bloc.spot (oak) & °bloc (carrara)




°bloc.spot, brushed brass & °bloc, carrara bianco / showroom Lumartes, NYC



°bloc


# set-up guide

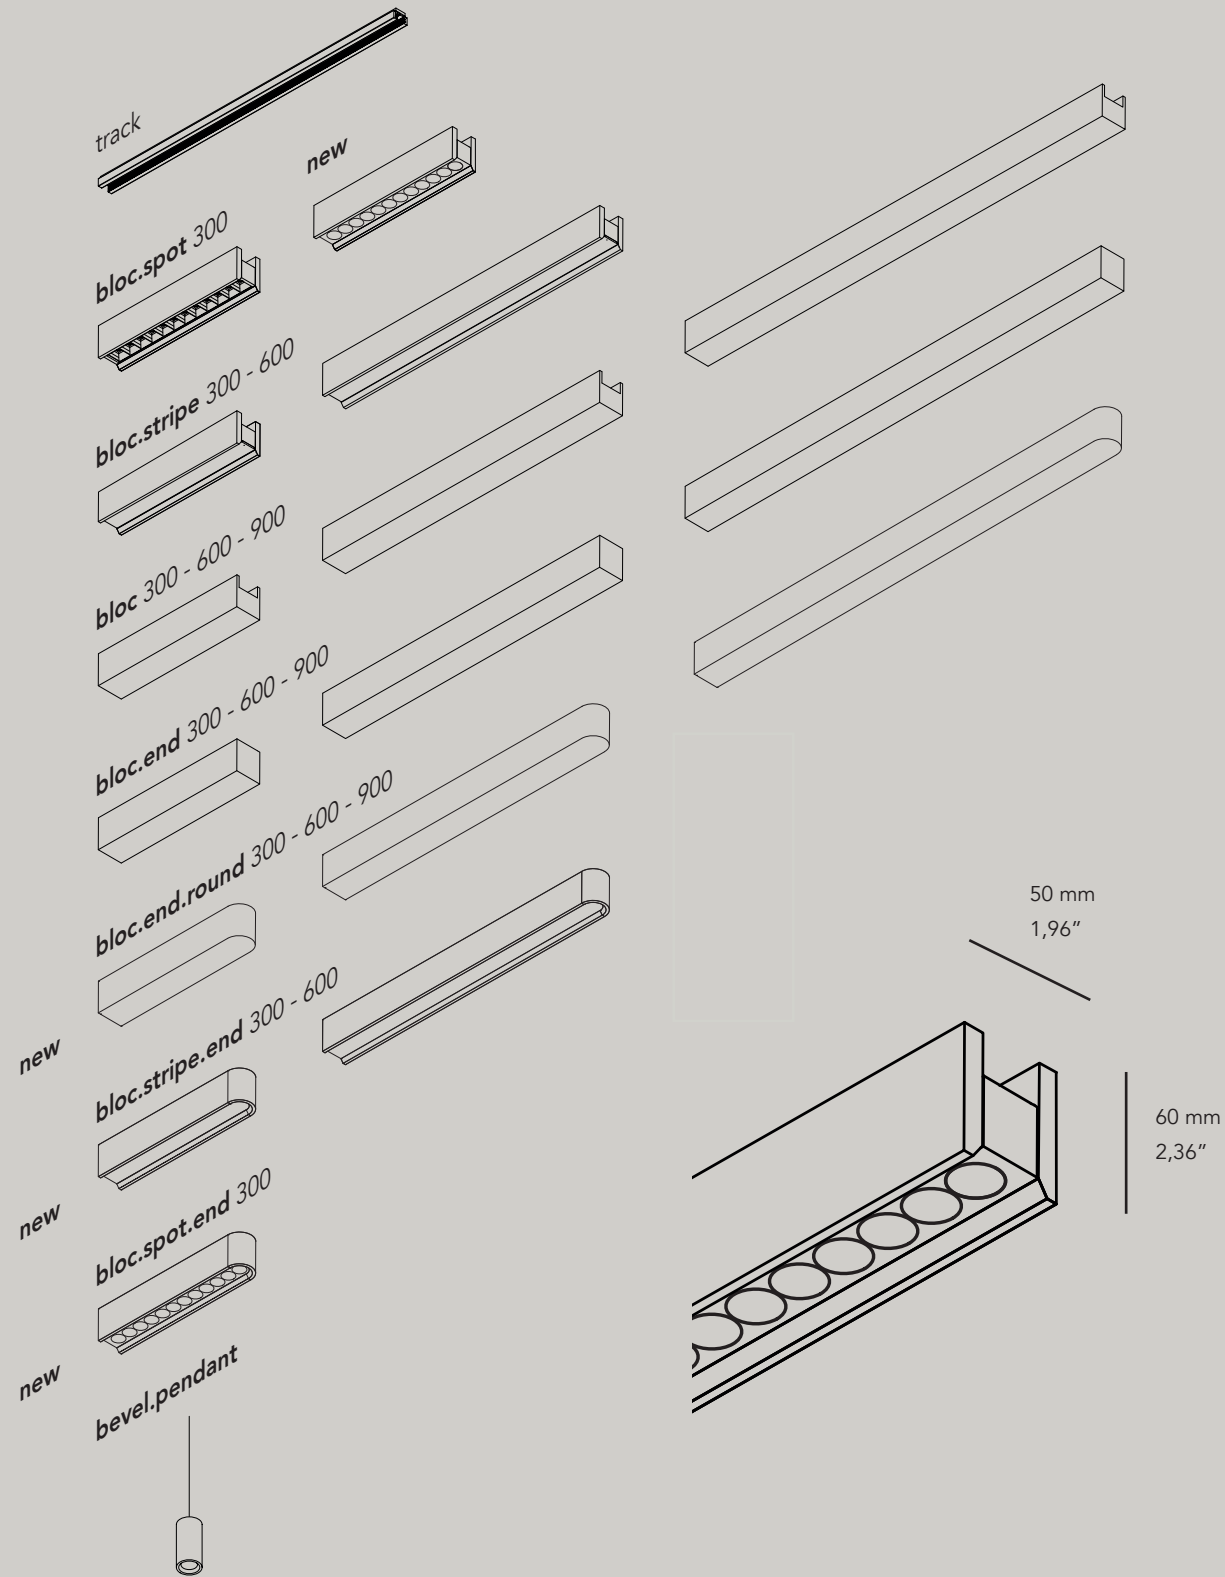

Order Code	BBBB	Length
20000.0100.BBBB bloc track black	0500	500 mm
	1000	1000 mm
	2000	2000 mm
	3000	3000 mm

## Accessories


- 20252.0000 bloc track pendant 2 m steel cable suspension (incl. elec. cable)
- 20253.0000 bloc track pendant 2 m steel cable suspension (1 per meter)
- 20254.0000 bloc track pendant 2 m bar suspension (incl. elec. cable)
- 20255.0000 bloc track pendant 2 m bar suspension (1 per meter)

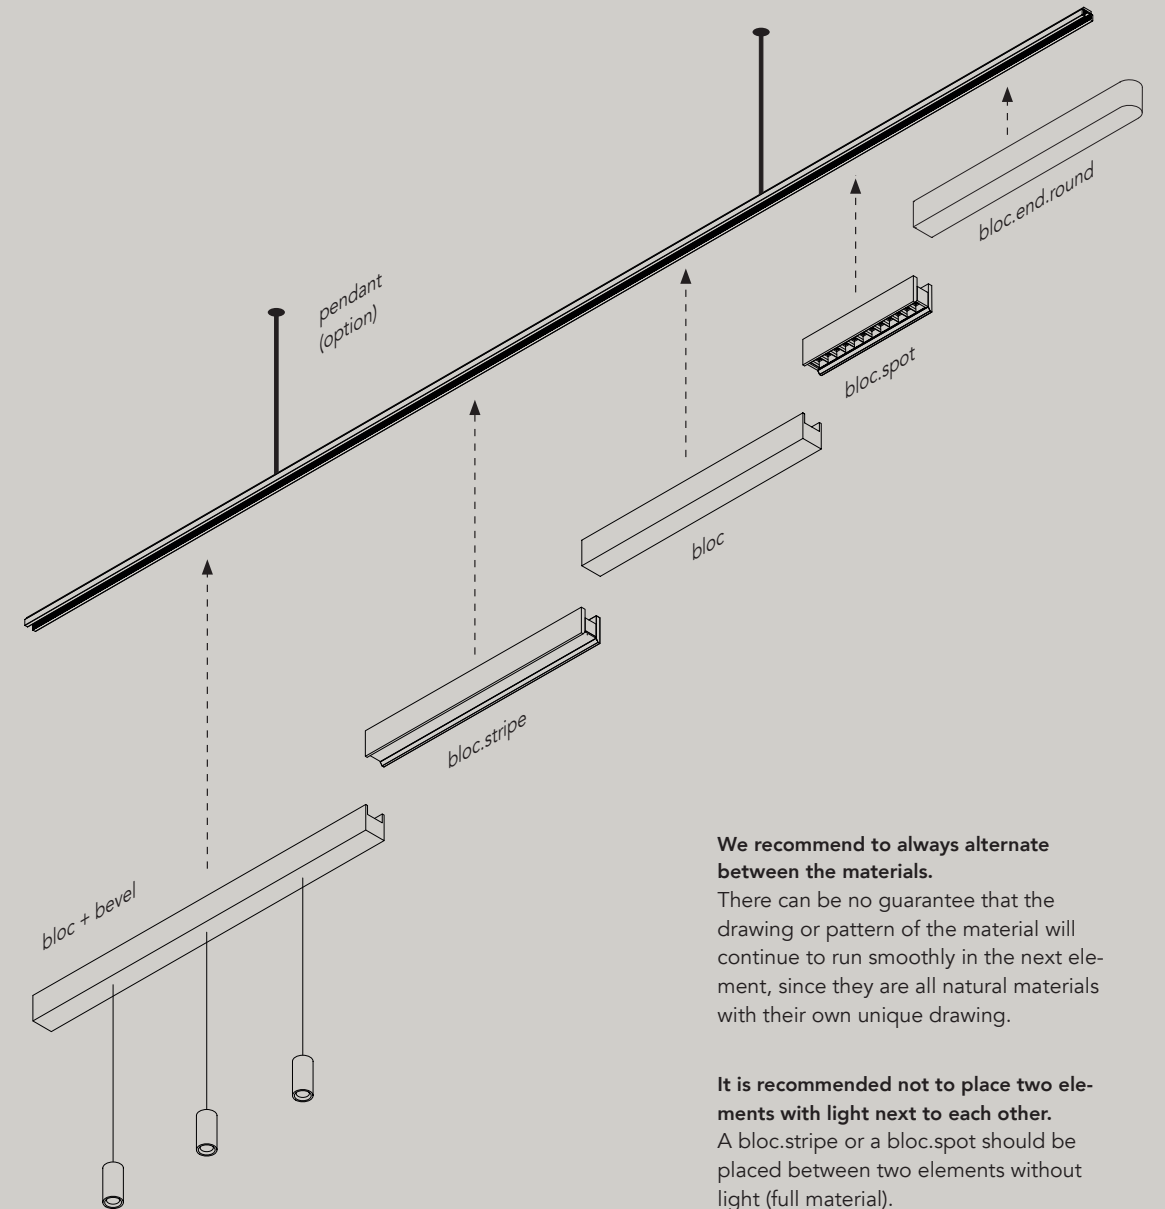

**We recommend to always alternate between the materials.**  
There can be no guarantee that the drawing or pattern of the material will continue to run smoothly in the next element, since they are all natural materials with their own unique drawing.

**It is recommended not to place two elements with light next to each other.**  
A bloc.stripe or a bloc.spot should be placed between two elements without light (full material).




Powersupply can be integrated in bloc elements (without light)

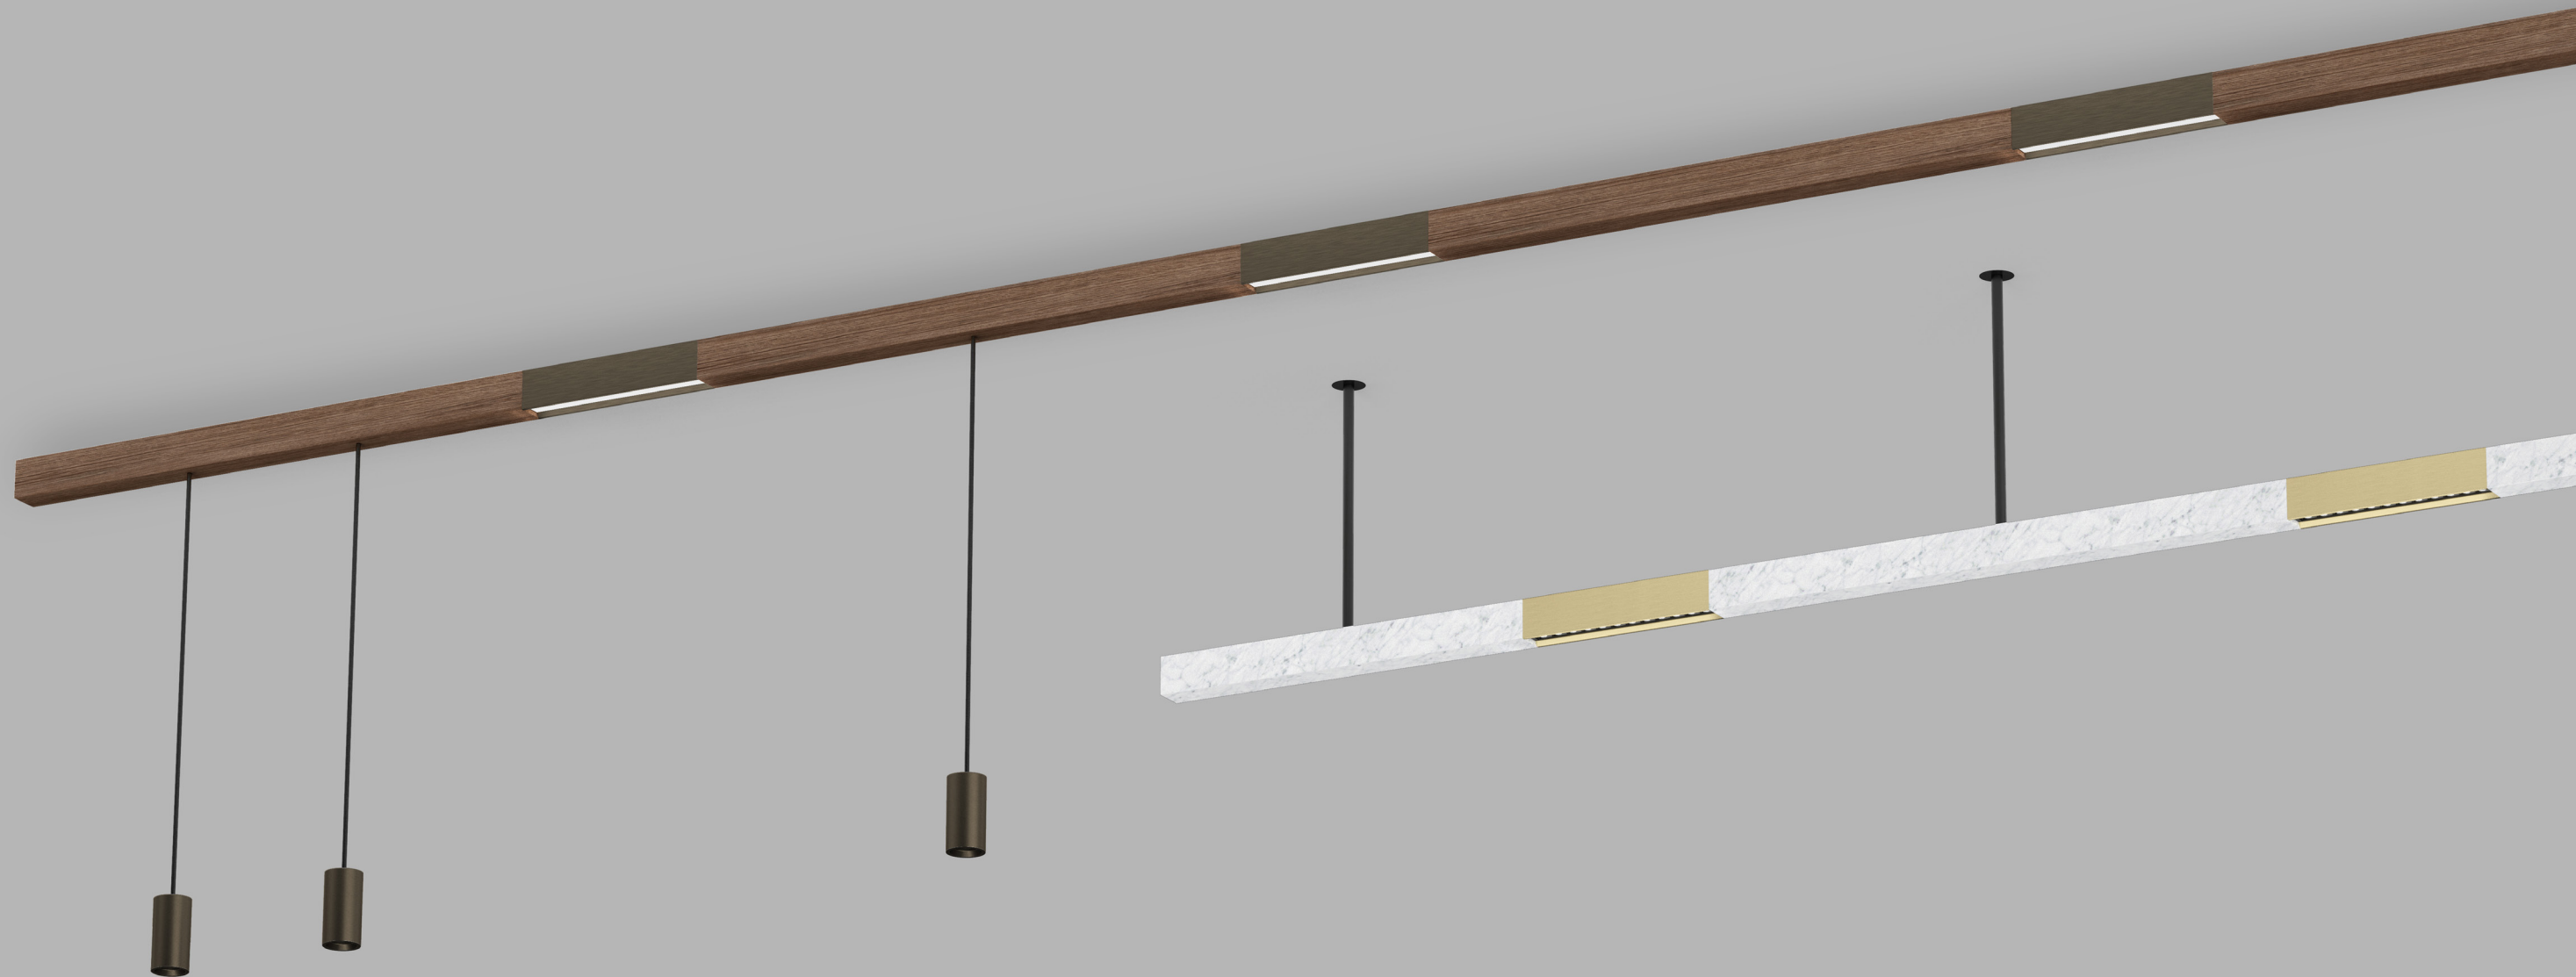

# ° bloc.spot

materials aluminum / PC  
 weight from 0,5-5kg  
 voltage 48 Vdc  
 ugr <10  
 wattage 13W - 26W (high output)  
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa

IP20 



**Order Code**

**20300.AA00.BBBB.CCC.DD**  
 bloc spot 300 - square reflector  
**20301.AA00.BBBB.CCC.DD**  
 bloc spot 300 - square reflector high output


**20310.AA00.BBBB.CCC.DD**  
 bloc spot 300 - round reflector  
**20311.AA00.BBBB.CCC.DD**  
 bloc spot 300 - round reflector high output

**20312.AA00.BBBB.CCC.DD**  
 bloc spot 300 - round reflector end  
**20313.AA00.BBBB.CCC.DD**  
 bloc spot 300 - round reflector end high output



bloc.spot - brass alu brushed - square reflector

bloc.spot - brass alu brushed - round reflector

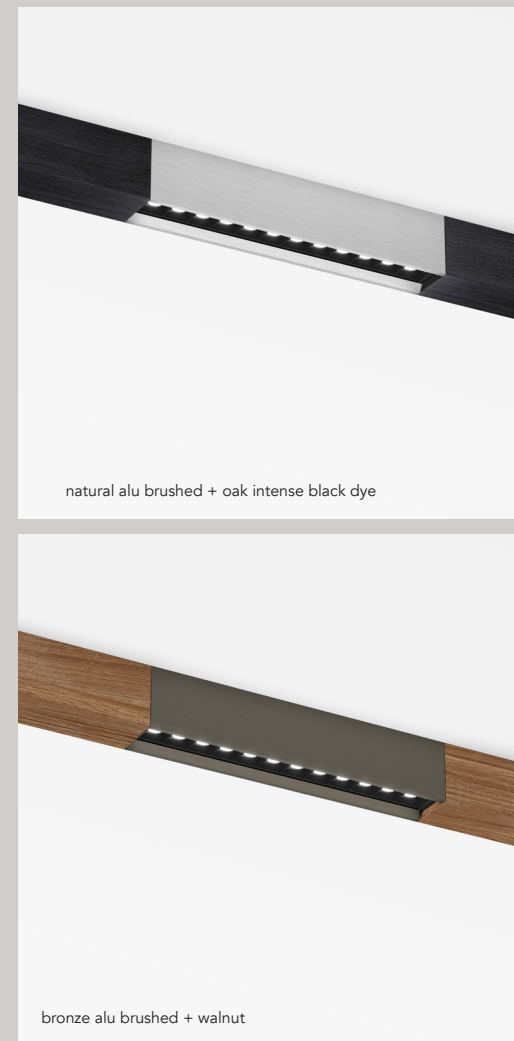

natural alu brushed + oak intense black dye

bronze alu brushed + walnut

**AA Finish**

- 01 black coated
- 02 white coated
- 21 black alu brushed
- 22 natural alu brushed
- 23 brass alu brushed
- 25 bronze alu brushed
- 26 dark bronze alu brushed

On request (round end version & high output not possible)

- 40 walnut, natural waxed
- 41 oak natural, natural waxed
- 42 oak classic brown dye
- 43 oak intense black dye
- 61 carrara bianco extra, honed

**BBBB Light**

- 9527 cri >95, 2700K
- 9530 cri >95, 3000K
- 9540 cri >95, 4000K - on request

CCC	Optic	Output*	High output*
200	20 deg	1090lm - 5650cd	1870lm - 9770cd
300	30 deg	1055lm - 3310cd	1820lm - 5750cd
600	60 deg	1090lm - 1200cd	1870lm - 2060cd


**DD Dimming**

- ND no dimming
- DA dali (0/1-10V, switchDIM, Casambi through interface)
- CA casambi control

\* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

# °bloc.stripe

materials aluminum / PC  
 weight from 0,5-5kg  
 voltage 48 Vdc  
 wattage 8,2W - 16,4W (high output)  
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa

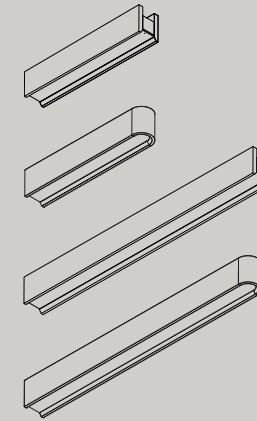

**Order Code**

- 20400.AA00.BBBB.CCC.DD bloc stripe 300
- 20401.AA00.BBBB.CCC.DD bloc stripe 300 high output\*
- 20404.AA00.BBBB.CCC.DD bloc stripe 300 end
- 20405.AA00.BBBB.CCC.DD bloc stripe 300 end high output\*
- 20410.AA00.BBBB.CCC.DD bloc stripe 600
- 20411.AA00.BBBB.CCC.DD bloc stripe 600 high output\*
- 20414.AA00.BBBB.CCC.DD bloc stripe 600 end
- 20415.AA00.BBBB.CCC.DD bloc stripe 600 end high output\*

\*only available for alu finishes & black/white paint

IP20



°bloc stripe 300 - brass alu brushed + natural oak



°bloc stripe 600 - brass alu brushed + carrara bianco



brass alu brushed, round end + carrara bianco



bronze alu brushed + oak classic brown dye

AA	Finish
01	black coated
02	white coated
21	black alu brushed
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed

On request (round end version & high output not possible)

40	walnut, natural waxed
41	oak natural, natural waxed
42	oak classic brown dye
43	oak intense black dye
61	carrara bianco extra, honed

BBBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K
9540	cri >95, 4000K - on request

CCC	Optic	Output	High output*
001	frosted ice	880lm - 310cd	1610lm - 560cd
002	microprism	780lm - 370cd	1430lm - 680cd

DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)
CA	casambi control

\* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.



# °bloc


## Order Code

- 20600.AA00 bloc 300
- 20610.AA00 bloc 600
- 20620.AA00 bloc 900
- 20601.AA00 bloc 300 end
- 20611.AA00 bloc 600 end
- 20621.AA00 bloc 900 end
- 20603.AA00 bloc 300 end round
- 20613.AA00 bloc 600 end round
- 20623.AA00 bloc 900 end round

bloc  
300-600-900

bloc end  
300-600-900

bloc end round  
300-600-900

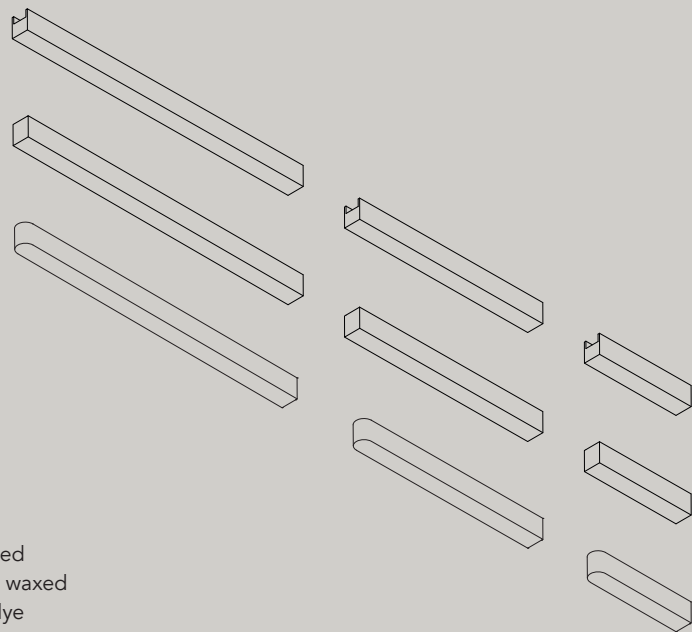

## AA Finish


- 01 black
- 02 white
- 40 walnut, natural waxed
- 41 oak natural, natural waxed
- 42 oak classic brown dye
- 43 oak intense black dye
- 61 carrara bianco extra, honed

Custom material on request  
Oak can be dyed in reference color

## 00 Driver

- 00 not included
- 01 power supply 100W included

# °bloc colors


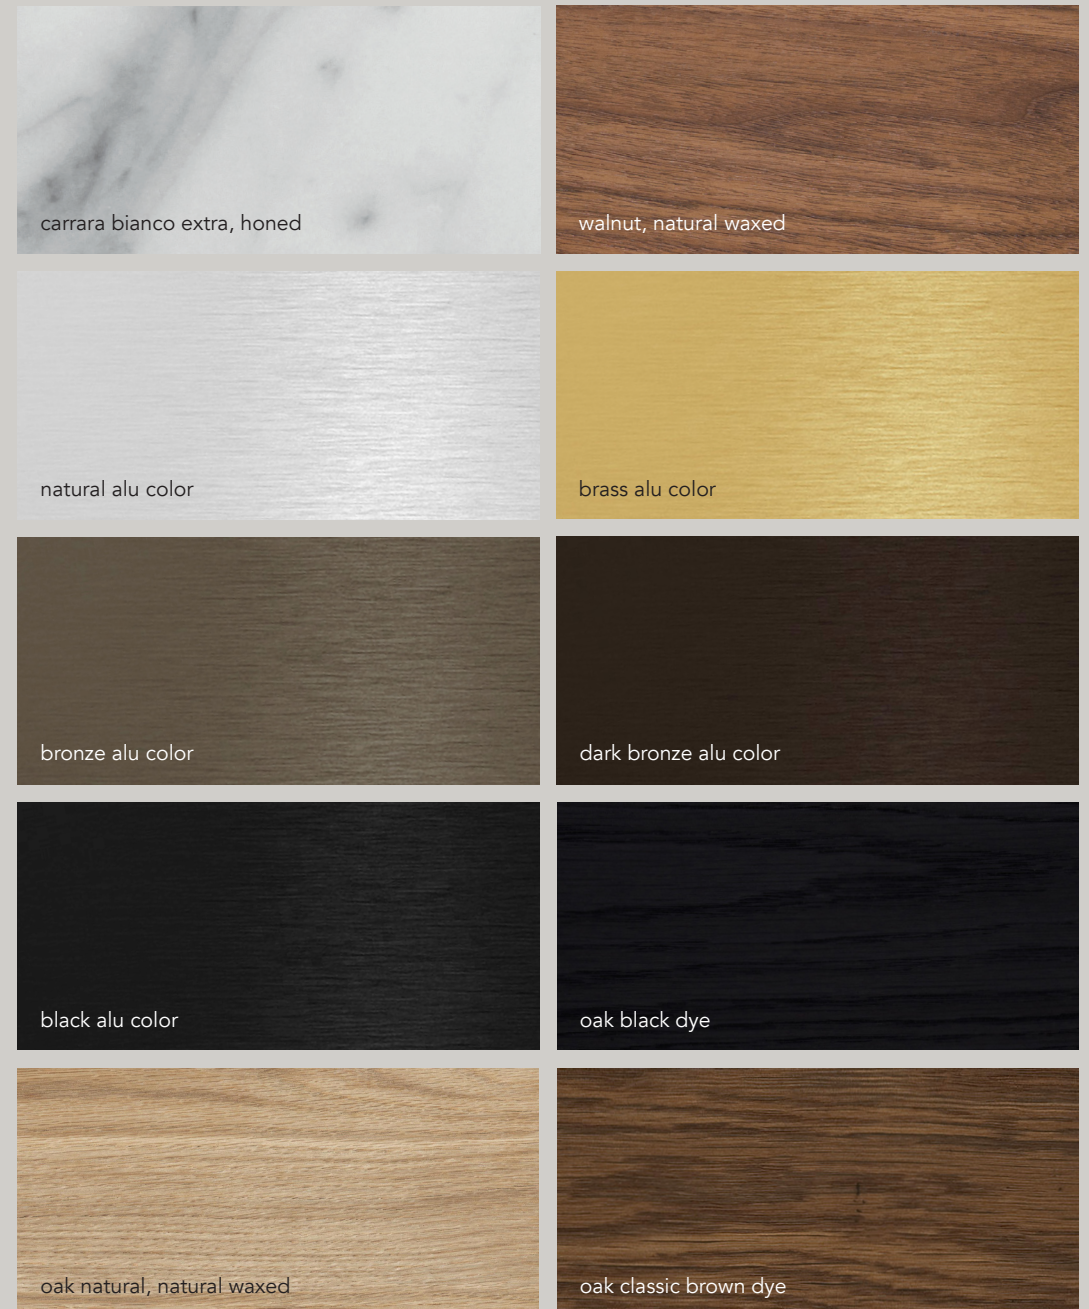


scale 1/1 - Differences in colors and patterns may occur since these are natural materials.

# °bloc.bevel

materials aluminum / PC  
 weight 600gr / 1.32lb  
 voltage 48 Vdc  
 wattage 8,2 W  
 ugr <19  
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa\*

IP20   

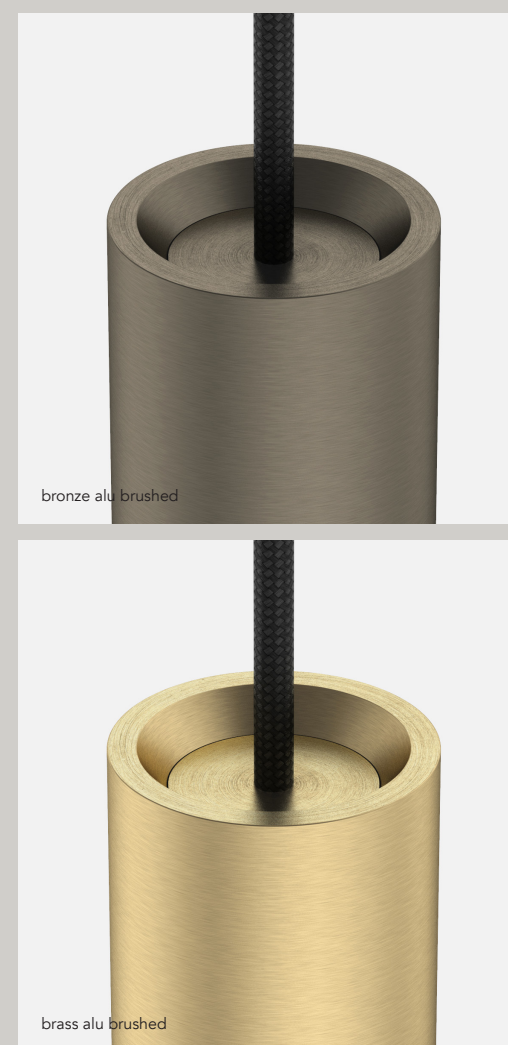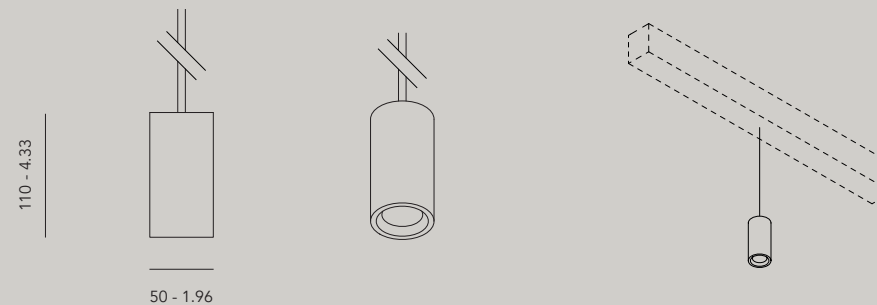

**Order Code**

20500.AA00.BBBB.CCC.DD bevel  
 20501.AA00.BBBB.CCC.DD bevel monopoint

**°bevel must always be accompanied with a °bloc** (see page 126)

max. 1 °bevel on bloc.300  
 max. 2 °bevel on bloc.600  
 max. 3 °bevel on bloc.900

AA	Finish
01	black
02	white
22	aluminum brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed

BBBB	Light
9527	cri 95, 2700K
9530	cri 95, 3000K

CCC	Optic	Output*
300	30°	670lm - 1550cd
450	45°	700lm - 1070cd
600	60°	690lm - 811cd

DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)

**Accessories**

10150.0100 recessed ceiling rose black, Ø50 mm  
 10150.0200 recessed ceiling rose white, Ø50 mm



\* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.