

TECHNICAL.
FUNCTIONAL.
EFFICIENT.



STAY WELL-INFORMED

Scan QR code, select country and get our latest prices.
Visit us at [slv.com](https://www.slv.com)

TECHNICAL.
FUNCTIONAL.
EFFICIENT.

 **SLV**tec

TECHNICAL. FUNCTIONAL. EFFICIENT.

EDITORIAL

CAME TO STAY [06](#)

INDOOR

PANEL [08](#)

SURFACE [12](#)

TRACKSPOT [16](#)

DOWNLIGHT [22](#)

UNIVERSAL
DOWNLIGHT [26](#)

INDUSTRY

WATERPROOF [34](#)

INDUSTRY BATTEN [38](#)

HIGHBAY [42](#)

OUTDOOR

OUTDOOR BULKHEAD [46](#)

FLOODI [50](#)

LAMP

LED TUBES [54](#)

LED STRIPS & MORE

GRAZIA [58](#)

FLEX STRIPS
ACCESSORIES [64](#)

OPERATING DEVICES
& CONTROLLERS [70](#)

HERE TO STAY

As a reliable partner for electricians and the specialised trade, we are constantly working to meet the needs of you – our customers – even better. As a full-range supplier, we will now be able to offer you the right technical lights and accessories for your day-to-day business. To this end, we have continued on our path of innovation and developed a completely new brand for technical and functional solutions: SLVtec.

The logo for SLVtec features a stylized blue plus sign icon to the left of the text 'SLVtec'. The 'SLV' is in a bold, dark grey sans-serif font, and 'tec' is in a smaller, lighter grey sans-serif font.

„SLVtec is our answer to the challenges of today's installer: high efficiency, reliable quality and easy installation – without compromise.“

Mark Henrik Körner,
CEO SLV Lighting Group



Fast and reliable delivery 24 h (Germany), 48 h (Europe)



Great value for money



5-year guarantee*



We offer 98 % stock availability



German engineering



OUR PROMISE

EFFICIENT AND MULTIFUNCTIONAL


Discover our new technical product range: SLVtec. With state-of-the-art LED technology, we offer energy-efficient and functional lighting solutions for indoor and outdoor use. From wet room lights to high-bay spotlights – our products impress with quality and multi-functionality. Thanks to Multi-Color, Multi-Lumen and MultiZoom of our new lights, you are flexible in your planning and well equipped for your next project.

Decide in favour of SLVtec and order now from your specialist dealer or contact our sales team with confidence.

OUR PROMISE

Within the SLVtec product line, you also get high-quality products and continue to benefit from high availability and excellent service. The optimal value for money and 5-year guarantee* underline our functional product portfolio.

*Please note the guarantee conditions available at slv.com › Service › Downloads › Guarantee conditions

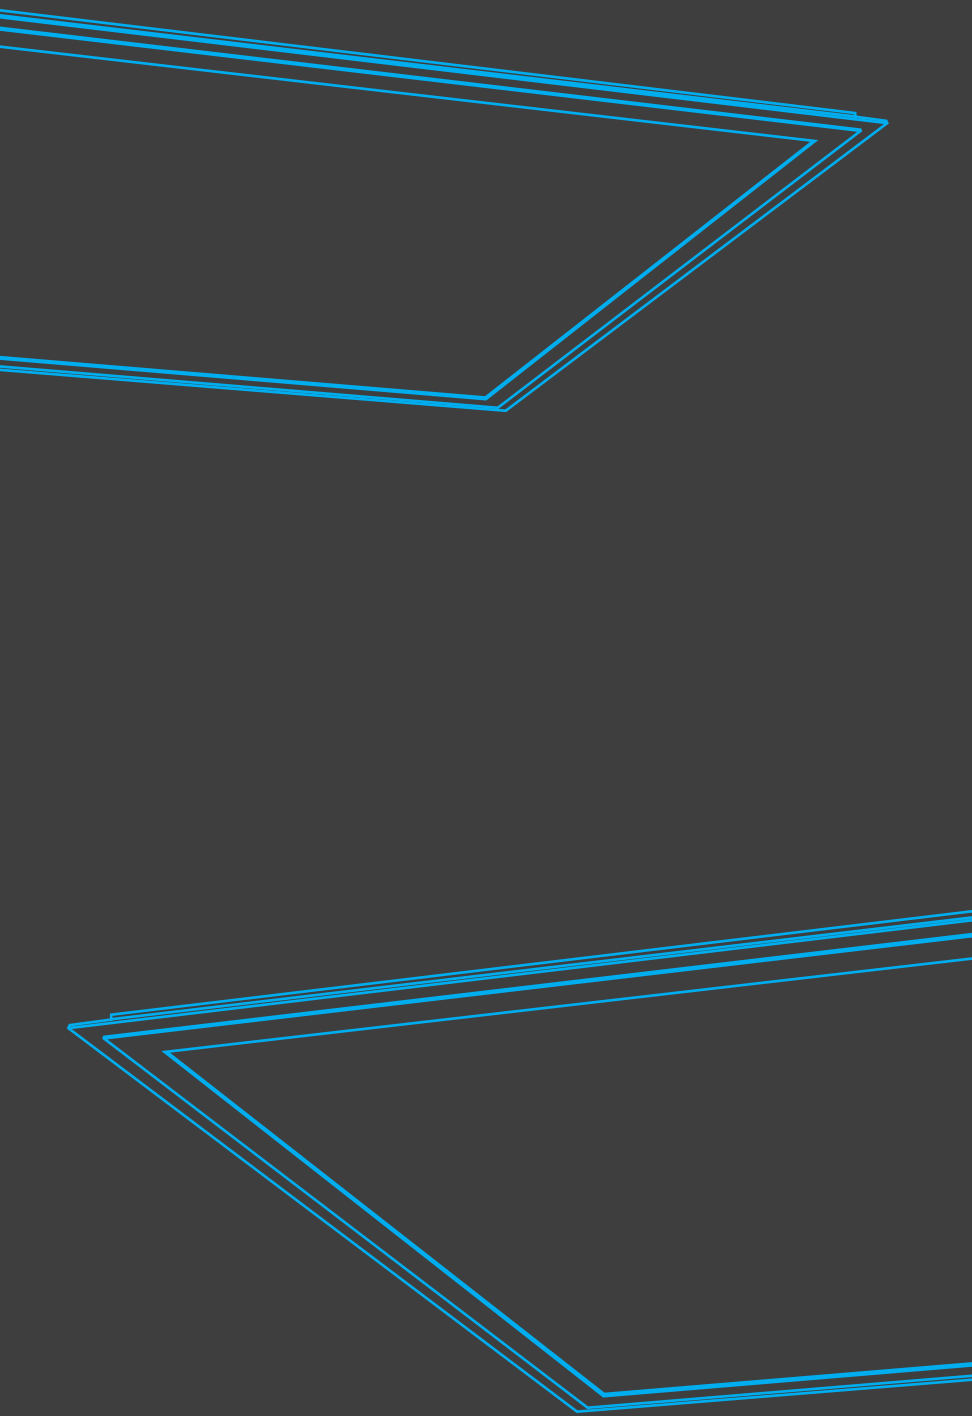

COMBINE



PANEL



Surface-mounted
or recessed
mounting frame



When purchasing a PANEL
the mounting frame is
not included as standard.

PANEL

PRODUCT ADVANTAGES



High energy saving thanks to efficiency of up to 126 lm/W

Can be used as office lighting thanks to UGR<19

Simple change of light colour by means of DIP switch

Solid design and homogeneous light

The external driver enables flexibility and easy installation

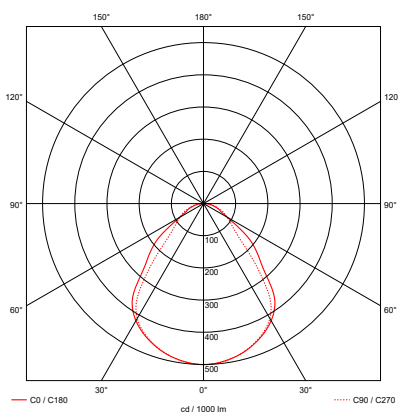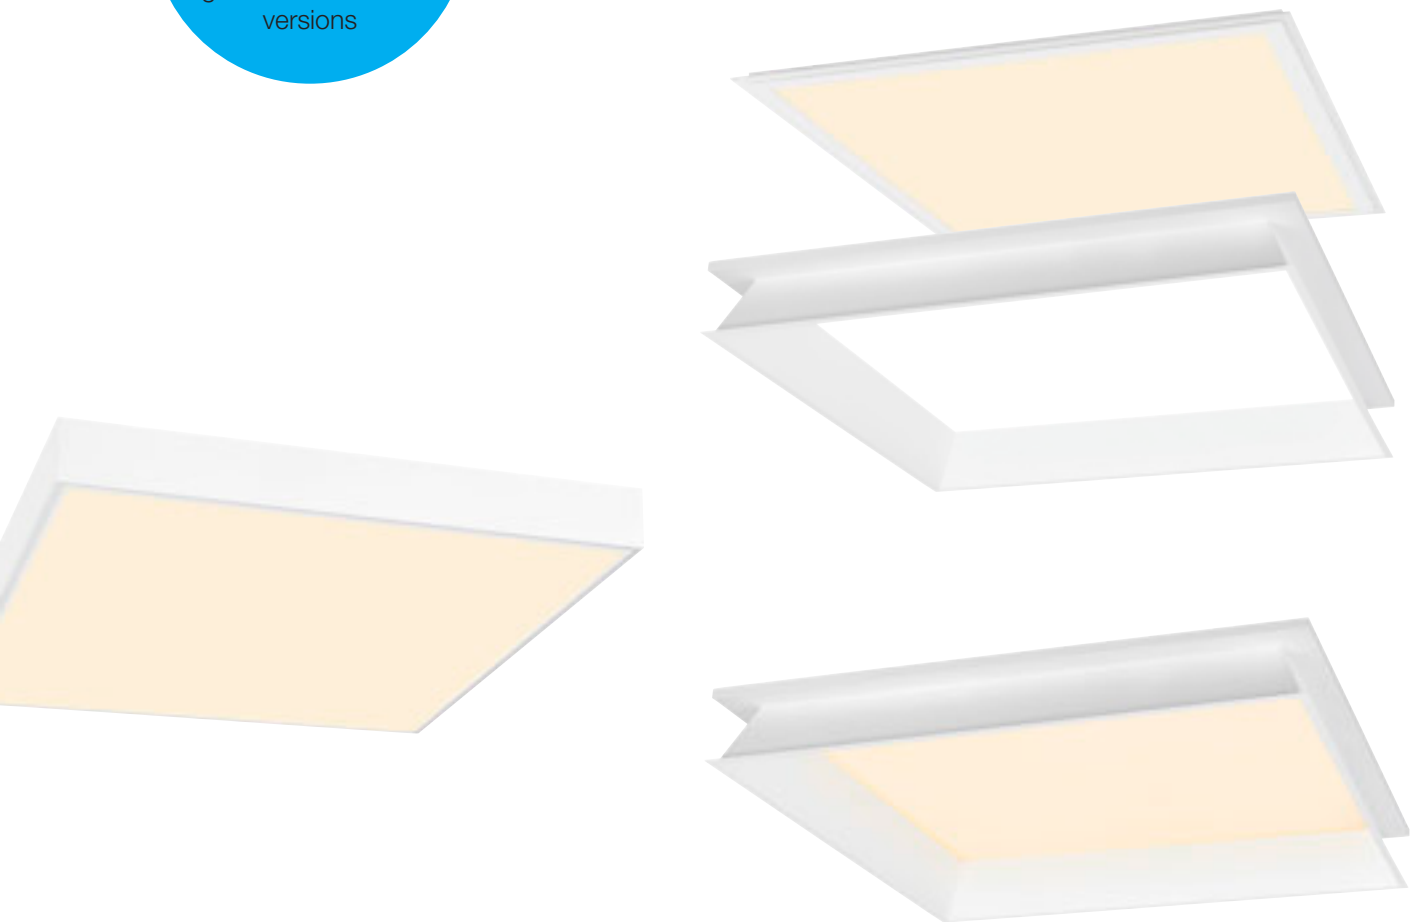

The graphic refers to article 1007498 in 3000 K.

PRODUCT CHARACTERISTICS

Available as classic UGR<22, glare-free UGR<19 and DALI variant

Surface-mounted and recessed installation with separately available mounting frames

Protection rating IP40

Colour rendering CRI>80

Multi-Color: 3000 K / 4000 K

AREAS OF APPLICATION


Office, corridors, conference rooms

PANEL

INDOOR



Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
PANEL V 600 34 W, 830 / 840	○	34 W	220-240 V	□	4100 lm	121 lm/W	3000 K
					4300 lm	126 lm/W	4000 K
PANEL V 600 34 W, 830 / 840, UGR	○	34 W	220-240 V	□	4000 lm	118 lm/W	3000 K
					4200 lm	124 lm/W	4000 K
PANEL V DALI 600 34 W, 830 / 840, UGR	○	34 W	220-240 V	□	4000 lm	118 lm/W	3000 K
					4200 lm	124 lm/W	4000 K
PANEL V 625 34 W, 830 / 840	○	34 W	220-240 V	□	4100 lm	121 lm/W	3000 K
					4300 lm	126 lm/W	4000 K
PANEL V 625 34 W, 830 / 840, UGR	○	34 W	220-240 V	□	4000 lm	118 lm/W	3000 K
					4200 lm	124 lm/W	4000 K
PANEL V DALI 625 34 W, 830 / 840, UGR	○	34 W	220-240 V	□	4000 lm	118 lm/W	3000 K
					4200 lm	124 lm/W	4000 K

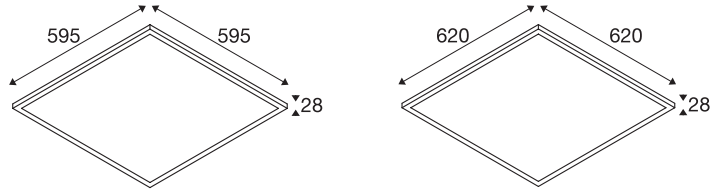

CRI					Service life	UGR	Control	IP	IK	Prod no.	GBP
>80	115°	-	-	-	 L80B10	<22	-	40	-	1007496	56.00
>80	85°	-	-	-	 L80B10	<19	-	40	-	1007498	65.00
>80	85°	-	-	-	 L80B10	<19		40	-	1007504	95.00
>80	115°	-	-	-	 L80B10	<22	-	40	-	1007497	56.00
>80	85°	-	-	-	 L80B10	<19	-	40	-	1007499	65.00
>80	85°	-	-	-	 L80B10	<19		40	-	1007505	95.00



L x W x H (mm):
600 x 600 x 63



600 x 600 x 71



625 x 625 x 63




625 x 625 x 71



Ø x L (mm):
1,5 x 1500

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
PANEL 600 surface-mounted mounting frame		-	-	-	1007474	39.00
PANEL 600 recessed mounting frame		-	-	-	1007575	56.00
PANEL 625 surface-mounted mounting frame		-	-	-	1007475	39.00
PANEL 625 recessed mounting frame		-	-	-	1007576	56.00
PANEL V safety rope 1500 mm		-	-	-	1007577	13.00

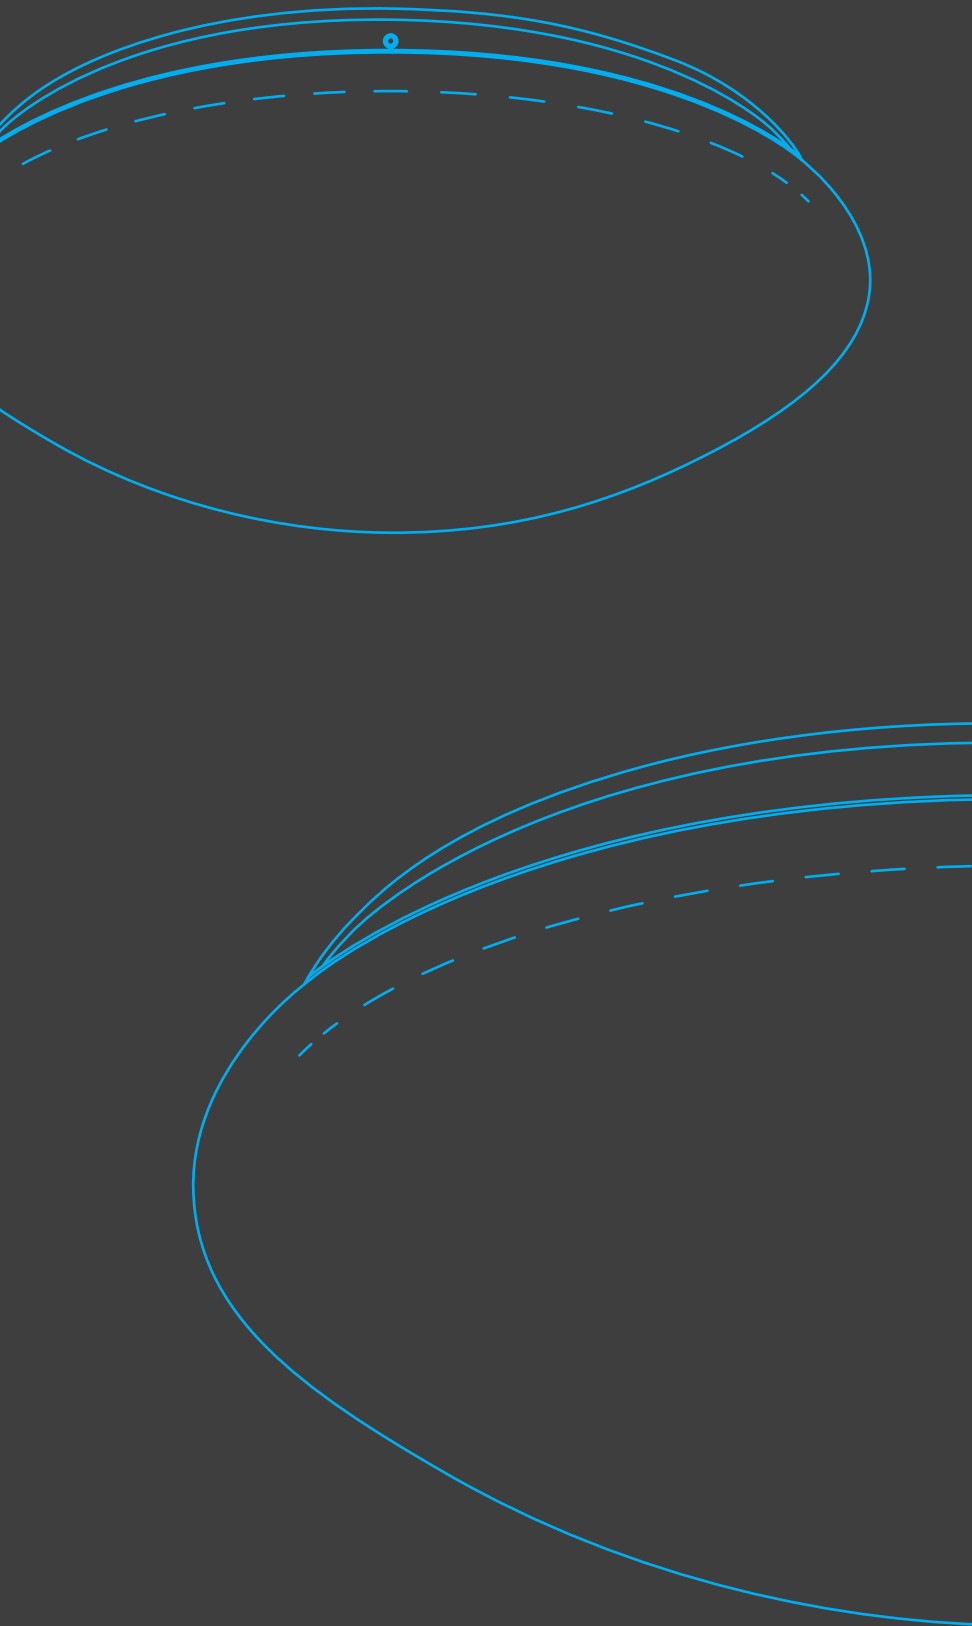

3000 K

or

4000 K




SURFACE

PRODUCT ADVANTAGES

Splash-proof light with IP44 for use in the bathroom, stairwell or cellar

Easy change of colour temperature and total wattage via DIP switch

Convenient installation thanks to removable cover

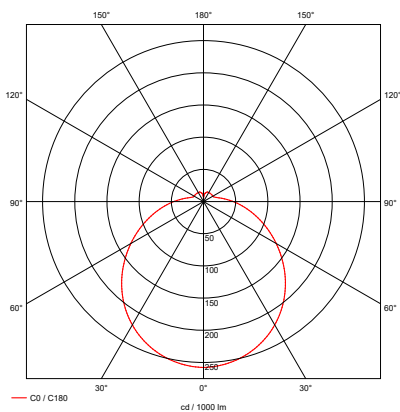

The graphic refers to the article 1007516 in 20 W and 3000 K.

PRODUCT CHARACTERISTICS

Multi-Color: 3000 K / 4000 K

Switchable total wattage 10 W / 15 W / 20 W

Additional version with microwave sensor available

CRI>80

AREAS OF APPLICATION


Stairwells, corridors, bathrooms







SURFACE


INDOOR



Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
SURFACE V 390 <i>10 / 15 / 20 W, 830 / 840, IP44</i>	○	20 W	220-240	⊕	1850 lm	93 lm/W	3000 K
					2000 lm	100 lm/W	4000 K
SURFACE V 390 <i>10 / 15 / 20 W, 830 / 840, IP44, Sensor</i>	○	20 W	220-240	⊕	1850 lm	93 lm/W	3000 K
					2000 lm	100 lm/W	4000 K



	CRI					Service life	UGR	Control	IP	IK	Prod no.	GBP
	>80	120°	-	-	-	 L80B10	-	-	44	-	1007516	43.00
	>80	120°	-	-	-	 L80B10	-	-	44	-	1007517	56.00

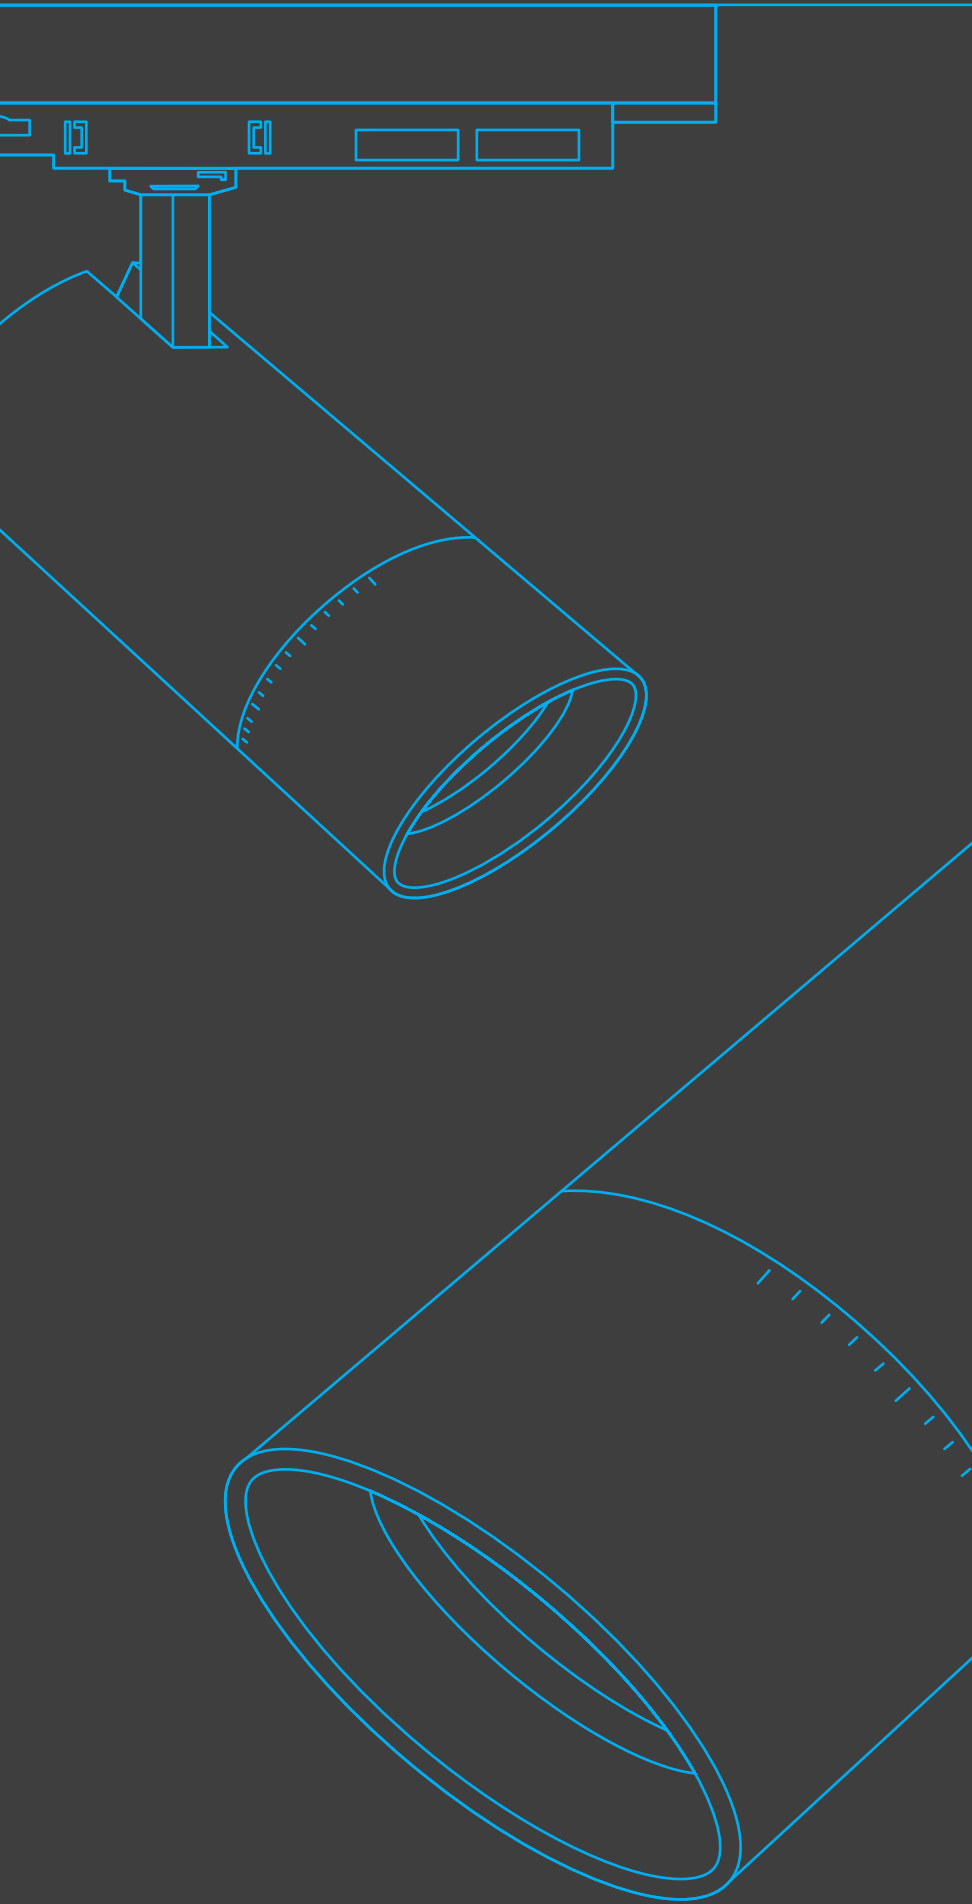

Zoom lens
continuously adjustable
from 24° to 60°
by mechanical rotation



TRACKSPOT

PRODUCT ADVANTAGES

Zoom lens continuously adjustable from 24° to 60° by mechanical rotation


Easy change of light colour and total wattage via DIP switch

High-quality 3-phase track spotlight with excellent light quality thanks to CRI>90

Simple and timeless design



90° vertically and 330° horizontally
rotatable

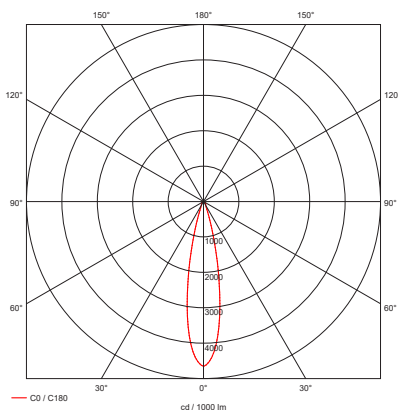

The graphic refers to article 1007656
in 30 W, 3000 K and 24° beam angle.

PRODUCT CHARACTERISTICS

Available in two sizes, in black and white

Switchable total wattage: 10 W / 15 W / 20 W (size S);
25 W / 30 W / 35 W (size M)

Multi-Color: 2700 K / 3000 K / 4000 K

CRI>90

AREAS OF APPLICATION

Fashion shops, supermarkets, hotels

SIMPLE ALL-ROUNDER

The new SLVtec product line is introduced with a highlight: the SLV trackspot. This high-quality 3-phase track spotlight with mechanical zoom lens offers electricians and lighting designers a high-output tool for designing rooms as well as for accent lighting of objects. With the multifunctional settings of the SLV trackspot, you create the right light in different areas of application. The trackspot is available in timeless design and simple colours black and white.



EASILY ADAPTABLE TO ANY LOCATION

- 1 Multi-Zoom: 24° to 60°
- 2 Multi-Color: 2700 K / 3000 K / 4000 K
- 3 Multi-power: 10 W / 15 W / 20 W (size S); 25 W / 30 W / 35 W (size M)
- 4 2 sizes in 2 colours each for 3-phase track system



MULTI-POWER

The switchable total wattage allows you to create different lumen packages. A switch on the light allows you to adjust the light intensity as needed to achieve the desired lighting level.

3-PHASE TRACK SYSTEM

Compatibility with a 3-phase track system ensures easy installation and flexible positioning of the lights.

MULTI-COLOUR

With the Multi-Colour function, you can adjust the light colour to create the desired mood. Using DIP switches, you can easily choose between 2700 K, 3000 K and 4000 K to create the right atmosphere.

HIGH-QUALITY HOUSING

Simple design available in black and white

MAXIMUM FLEXIBILITY

The TRACKSPOT can be rotated 90° vertically and 330° horizontally





MULTI-ZOOM



The zoom lens of the trackspot allows mechanical stepless adjustment of the beam angle from 24° to 60°. This allows you to specifically highlight your highlight and optimally illuminate the room.

TRACKSPOT


INDOOR



Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
Trackspot V 3Ph., 10 / 15 / 20 W, 927 / 930 / 940, 24°-60°, black	●	20 W	220-240 V		1800 lm	90 lm/W	2700 K
					1980 lm	99 lm/W	3000 K
					1920 lm	96 lm/W	4000 K
Trackspot V 3Ph., 10 / 15 / 20 W, 927 / 930 / 940, 24°-60°, white	○	20 W	220-240 V		1800 lm	90 lm/W	2700 K
					1980 lm	99 lm/W	3000 K
					1920 lm	96 lm/W	4000 K
Trackspot V 3Ph., 25 / 30 / 35 W, 927 / 930 / 940, 24°-60°, black	●	35 W	220-240 V		3090 lm	88 lm/W	2700 K
					3470 lm	99 lm/W	3000 K
					3300 lm	94 lm/W	4000 K
Trackspot V 3Ph., 25 / 30 / 35 W, 927 / 930 / 940, 24°-60°, white	○	35 W	220-240 V		3090 lm	88 lm/W	2700 K
					3470 lm	99 lm/W	3000 K
					3300 lm	94 lm/W	4000 K



CRI					Service life	UGR	Control	IP	IK	Prod no.	GBP
>90	24° - 60°	-	-	-	 L70B50	-	-	20	-	1007655	137.00
>90	24° - 60°	-	-	-	 L70B50	-	-	20	-	1007654	137.00
>90	24° - 60°	-	-	-	 L70B50	-	-	20	-	1007657	154.00
>90	24° - 60°	-	-	-	 L70B50	-	-	20	-	1007656	154.00

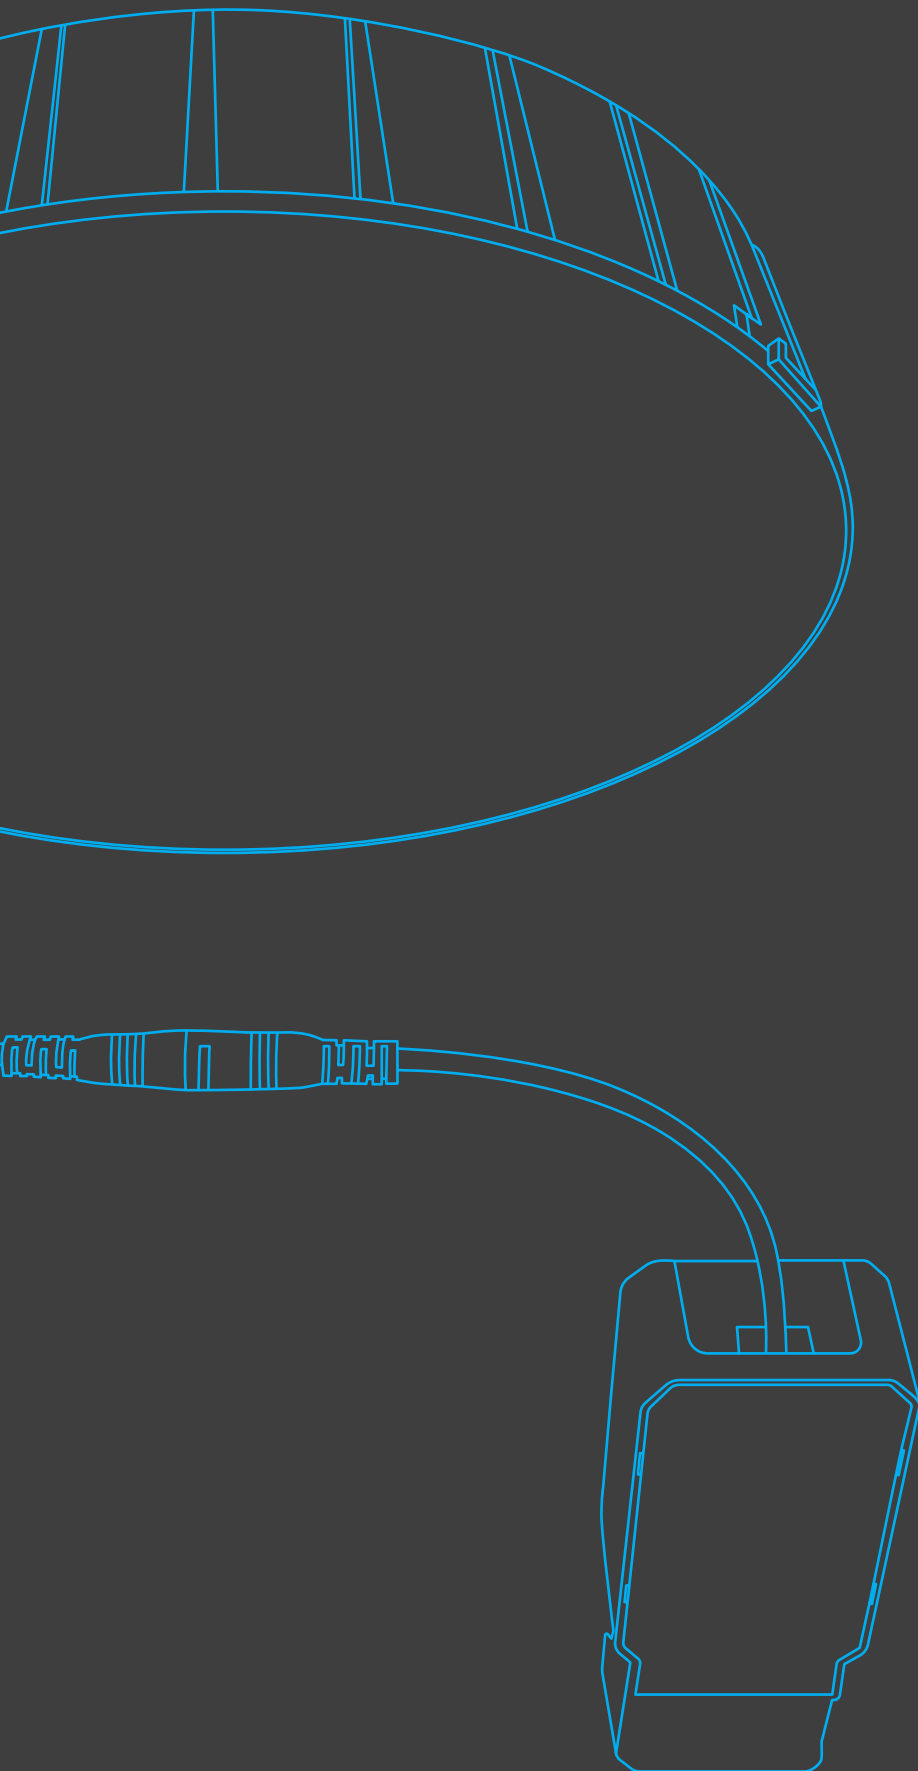

COMBINE



DOWNLIGHT VALUE
100 / 150 / 200

+



Flat or recessed covers
in three sizes and
two colours each

=



When purchasing a DOWNLIGHT
the mounting frame is
not included as standard.

DOWNLIGHT



PRODUCT ADVANTAGES


Simple change of light colour and light intensity by means of DIP switch

Easy change between the slightly recessed and the flat cover thanks to bayonet lock

More convenience during installation due to the integrated quick connector connection box of the LED driver

Less rework on the construction site due to common installation diameters of 100 mm, 150 mm and 200 mm

High energy saving thanks to efficiency of up to 126 lm/W

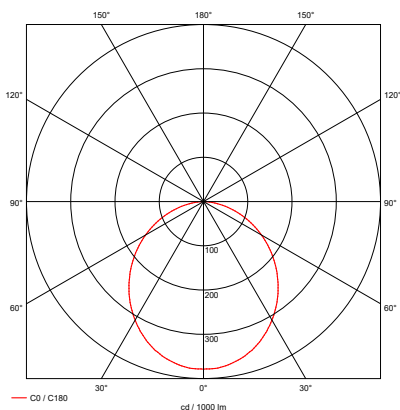

The graphic refers to the article 1007509 in 9 W and 3000 K.

PRODUCT CHARACTERISTICS

Three downlights with switchable total wattages (except DOWNLIGHT V 100) and switchable colour temperatures in the most common installation diameters

Multi-Colour: 3000 K / 4000 K

CRI>80

IP protection class: IP20 / IP54

AREAS OF APPLICATION


Offices, corridors, stairwells

DOWNLIGHT


INDOOR




Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
DOWNLIGHT V 100 6 W, 830 / 840, IP54	●	6 W	220-240 V	□	610 lm	102 lm/W	3000 K
					640 lm	107 lm/W	4000 K
DOWNLIGHT V 150 9 / 15 W, 830 / 840, IP54	●	15 W	220-240 V	□	1750 lm	117 lm/W	3000 K
					1900 lm	127 lm/W	4000 K
DOWNLIGHT V 200 15 / 21 W, 830 / 840, IP54	●	21 W	220-240 V	□	2360 lm	112 lm/W	3000 K
					2490 lm	119 lm/W	4000 K




1007476, 1007477




1007478, 1007479




1007480, 1007481










1007482, 1007483



1007484, 1007485




1007486, 1007487

CRI					Service life	UGR	Control	IP	IK	Prod no.	GBP
>80	105°	-	-	-	 L70B50	-	-	54*	02	1007508	39.00
>80	105°	-	-	-	 L70B50	-	-	54*	02	1007509	46.00
>80	105°	-	-	-	 L70B50	-	-	54*	02	1007510	52.00

*IP20 rear side



Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
DOWNLIGHT V 100 flat cover <i>black</i>	●	-	-	-	1007477	5.00
DOWNLIGHT V 100 flat cover <i>white</i>	○	-	-	-	1007476	5.00
DOWNLIGHT V 100 recessed cover <i>black</i>	●	-	-	-	1007479	5.00
DOWNLIGHT V 100 recessed cover <i>white</i>	○	-	-	-	1007478	5.00
DOWNLIGHT V 150 flat cover <i>black</i>	●	-	-	-	1007481	7.00
DOWNLIGHT V 150 flat cover <i>white</i>	○	-	-	-	1007480	7.00
DOWNLIGHT V 150 recessed cover <i>black</i>	●	-	-	-	1007483	7.00
DOWNLIGHT V 150 recessed cover <i>white</i>	○	-	-	-	1007482	7.00
DOWNLIGHT V 200 flat cover <i>black</i>	●	-	-	-	1007485	9.00
DOWNLIGHT V 200 flat cover <i>white</i>	○	-	-	-	1007484	9.00
DOWNLIGHT V 200 recessed cover <i>black</i>	●	-	-	-	1007487	9.00
DOWNLIGHT V 200 recessed cover <i>white</i>	○	-	-	-	1007486	9.00

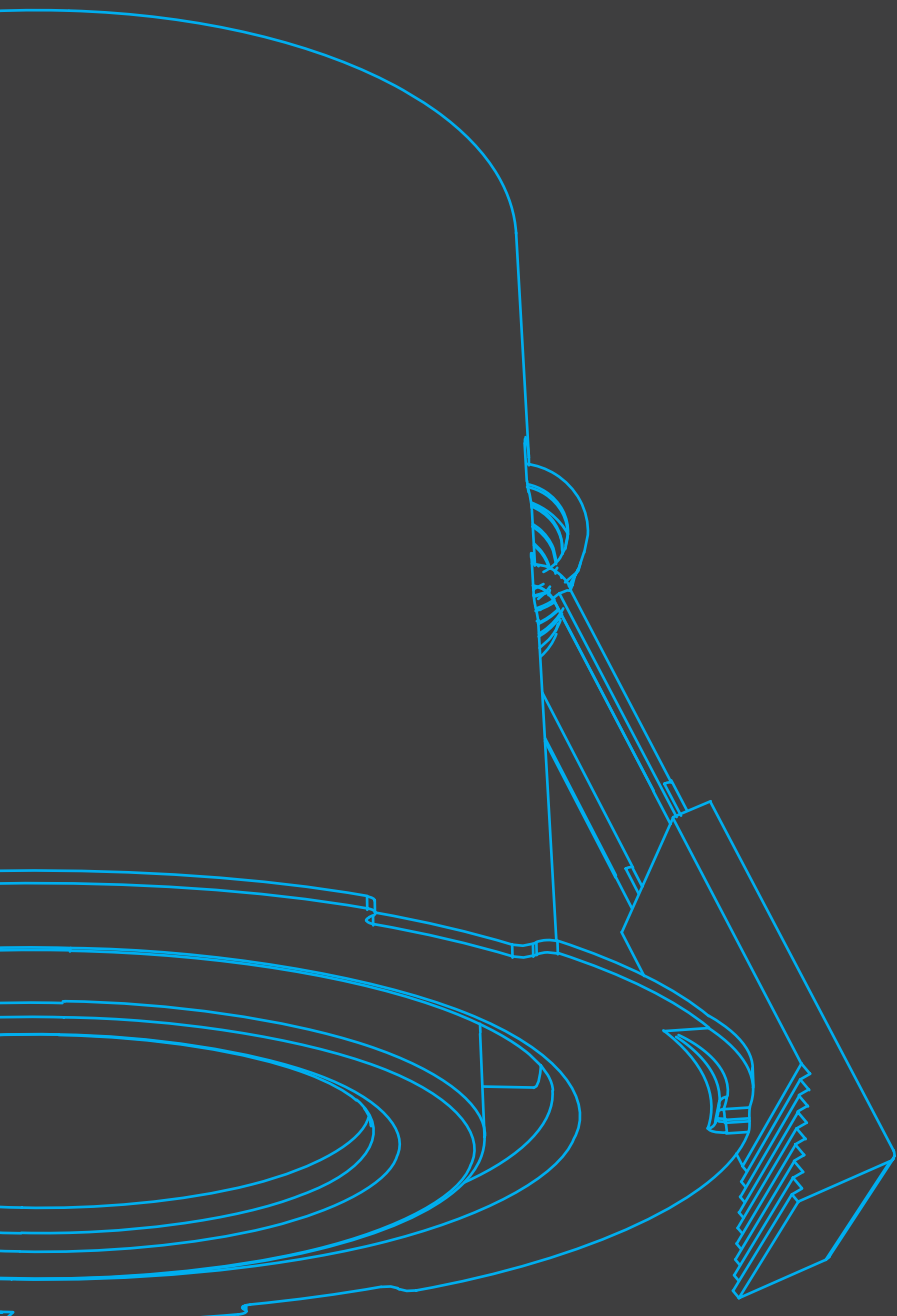

COMBINE



UNIVERSAL
DOWNLIGHT



Front ring in the colours
black, white, gold, gold matt
and brushed aluminium



When purchasing a
UNIVERSAL DOWNLIGHT,
the front ring is not
included as standard.



Would you like to learn
more about this product?
Watch the video now.

UNIVERSAL DOWNLIGHT

PRODUCT ADVANTAGES

Rigid and pivoting version with exchangeable covers

Switchable total wattage and colour temperatures


Low installation depth

Adapts visually and functionally to a wide variety of room situations

Easy to install thanks to quick-connector connection box



Also available
in a multipack
of 12

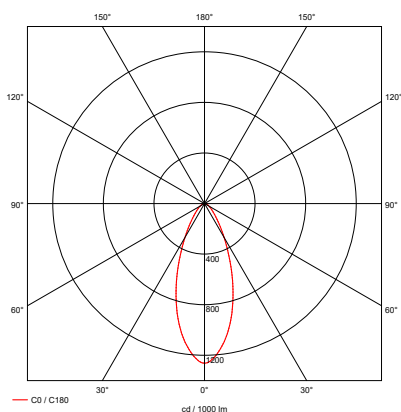

The graphic refers to the article
1007095 in 8 W and 3000 K.

PRODUCT CHARACTERISTICS

Powerful LED module with CRI>90

Switchable total wattage 5 W / 8 W

Multi-Colour: 2700 K / 3000 K / 4000 K / 6500 K

Round and square covers in five colours each available separately

For ceiling cut-out Ø 68 mm

AREAS OF APPLICATION

Residential, office, shop

CONFIGURE YOUR DOWNLIGHT

Unobtrusive and universally applicable: the UNIVERSAL DOWNLIGHT as a rigid and pivoting version are recessed lights that produce a targeted light with their narrow beam angle of 36 degrees. A wide range of colour temperature options (2700 K / 3000 K / 4000 K / 6500 K) can be selected via the CCT switch before installation. Natural colour reproduction is achieved with a CRI of over 90. The Quick Connector Box ensures the downlight is quick and easy to install. Complete your universal downlight with the separately available covers in round or square, each available in black, white, gold, gold matt and brushed aluminium.

CHOOSE YOUR FAVOURITE ...

- 1 version (rigid or pivoting)
- 2 Cover (round or square, in the colours black, white, gold, gold matt and brushed aluminium)
- 3 Colour temperature (2700 K / 3000 K / 4000 K / 6500 K)
- 4 Total wattage (5 W / 8 W)

DONE!



UNIVERSAL DOWNLIGHT

UNIVERSAL DOWNLIGHT



Available as rigid version

UNIVERSAL DOWNLIGHT MOVE



Available as a pivoting version



Exchangeable cover (round or square and in the colours
black, white, gold, gold matt and brushed aluminium)

Adjustable colour temperature
2700 K / 3000 K / 4000 K / 6500 K

Switchable total wattage
5 W / 8 W

High light quality and colour reproduction
thanks to LED with CRI>90

UNIVERSAL DOWNLIGHT

INDOOR




Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
UNIVERSAL DOWNLIGHT MOVE PHASE <i>IP20, pivoting, 5 / 8 W, 2700 / 3000 / 4000 / 6500 K, 38°, no cover</i>	●	8 W	220-240 V	□	560 lm	70 lm/W	2700 K
					610 lm	76 lm/W	3000 K
					680 lm	85 lm/W	4000 K
					640 lm	80 lm/W	6500 K
UNIVERSAL DOWNLIGHT PHASE <i>IP65, 5 / 8 W, 2700 / 3000 / 4000 / 6500 K, 38°, no cover</i>	●	8 W	220-240 V	□	560 lm	70 lm/W	2700 K
					610 lm	76 lm/W	3000 K
					680 lm	85 lm/W	4000 K
					640 lm	80 lm/W	6500 K



L x W x H (mm):

88 x 88 x 35

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
UNIVERSAL DOWNLIGHT cover <i>For downlight IP20, pivoting, square, black</i>	●	-	-	-	1007184	4.00
UNIVERSAL DOWNLIGHT cover <i>For downlight IP20, pivoting, square, white</i>	○	-	-	-	1007185	4.00
UNIVERSAL DOWNLIGHT cover <i>For downlight IP20, pivoting, square, gold</i>	●	-	-	-	1007187	4.00
UNIVERSAL DOWNLIGHT cover <i>For downlight IP20, pivoting, square, gold matt</i>	●	-	-	-	1007194	4.00
UNIVERSAL DOWNLIGHT cover <i>For downlight IP20, pivoting, square, aluminium</i>	●	-	-	-	1007186	4.00
UNIVERSAL DOWNLIGHT cover <i>For downlight IP65, square, black</i>	●	-	-	-	1007180	4.00
UNIVERSAL DOWNLIGHT cover <i>For downlight IP65, square, white</i>	○	-	-	-	1007181	4.00
UNIVERSAL DOWNLIGHT cover <i>For downlight IP65, square, gold</i>	●	-	-	-	1007183	4.00
UNIVERSAL DOWNLIGHT cover <i>For downlight IP65, square, gold matt</i>	●	-	-	-	1007193	4.00
UNIVERSAL DOWNLIGHT cover <i>For downlight IP65, square, aluminium</i>	●	-	-	-	1007182	4.00

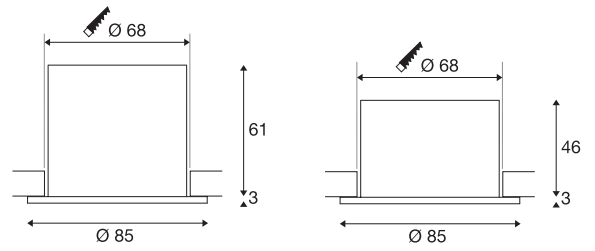

CRI					Service life	UGR	Control	IP	IK	Prod no.	GBP
>90	38°	-	30°	10	 L70B50	<28		20	02	1007090	24.00
>90	38°	-	-	10	 L70B50	<28		65*	02	1007095	23.00

*IP20 rear side



Ø x L (mm):
88 x 35

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
UNIVERSAL DOWNLIGHT cover For downlight IP20, pivoting, round, black		-	-	-	1007091	3.00
UNIVERSAL DOWNLIGHT cover For downlight IP20, pivoting, round, white		-	-	-	1007092	3.00
UNIVERSAL DOWNLIGHT cover For downlight IP20, pivoting, round, gold		-	-	-	1007094	4.00
UNIVERSAL DOWNLIGHT cover For downlight IP20, pivoting, round, gold matt		-	-	-	1007191	4.00
UNIVERSAL DOWNLIGHT cover For downlight IP20, pivoting, round, aluminium		-	-	-	1007093	4.00
UNIVERSAL DOWNLIGHT cover For downlight IP65, round, black		-	-	-	1007096	3.00
UNIVERSAL DOWNLIGHT cover For downlight IP65, round, white		-	-	-	1007097	3.00
UNIVERSAL DOWNLIGHT cover For downlight IP65, round, gold		-	-	-	1007099	4.00
UNIVERSAL DOWNLIGHT cover For downlight IP65, round, gold matt		-	-	-	1007192	4.00
UNIVERSAL DOWNLIGHT cover For downlight IP65, round, aluminium		-	-	-	1007098	4.00

UNIVERSAL DOWNLIGHT


RECESSED CEILING LIGHTS









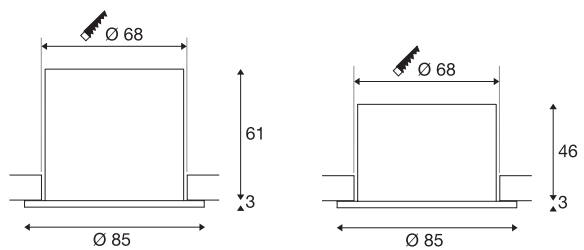






Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
Set consisting of 12 x 1007090 UNIVERSAL DOWNLIGHT MOVE PHASE, IP20, 38° + 1007091 UNIVERSAL DOWNLIGHT Cover, IP20, black	●	8 W	220-240 V		560 lm	70 lm/W	2700 K
					610 lm	76 lm/W	3000 K
					680 lm	85 lm/W	4000 K
					640 lm	80 lm/W	6500 K
Set consisting of 12 x 1007090 UNIVERSAL DOWNLIGHT MOVE PHASE, IP20, 38° + 1007092 UNIVERSAL DOWNLIGHT Cover, IP20, white	○	8 W	220-240 V		560 lm	70 lm/W	2700 K
					610 lm	76 lm/W	3000 K
					680 lm	85 lm/W	4000 K
					640 lm	80 lm/W	6500 K
Set consisting of 12 x 1007095 UNIVERSAL DOWNLIGHT PHASE IP65, 38° + 1007096 UNIVERSAL DOWNLIGHT Cover, IP65, black	●	8 W	220-240 V		560 lm	70 lm/W	2700 K
					610 lm	76 lm/W	3000 K
					680 lm	85 lm/W	4000 K
					640 lm	80 lm/W	6500 K
Set consisting of 12 x 1007095 UNIVERSAL DOWNLIGHT PHASE, IP65, 38° +1007097 UNIVERSAL DOWNLIGHT Cover, IP65, white	○	8 W	220-240 V		560 lm	70 lm/W	2700 K
					610 lm	76 lm/W	3000 K
					680 lm	85 lm/W	4000 K
					640 lm	80 lm/W	6500 K



 12 downlights and
 12 matching rings
 are included in
 each set



	CRI					Service life	UGR	Control	IP	IK	Prod no.	GBP
	>90	38°	-	30°	10	 L70B50	<28		20	02	1007273	309.00
	>90	38°	-	30°	10	 L70B50	<28		20	02	1007274	309.00
	>90	38°	-	-	10	 L70B50	<28		20 / 65	02	1007271	304.00
	>90	38°	-	-	10	 L70B50	<28		20 / 65	02	1007272	304.00

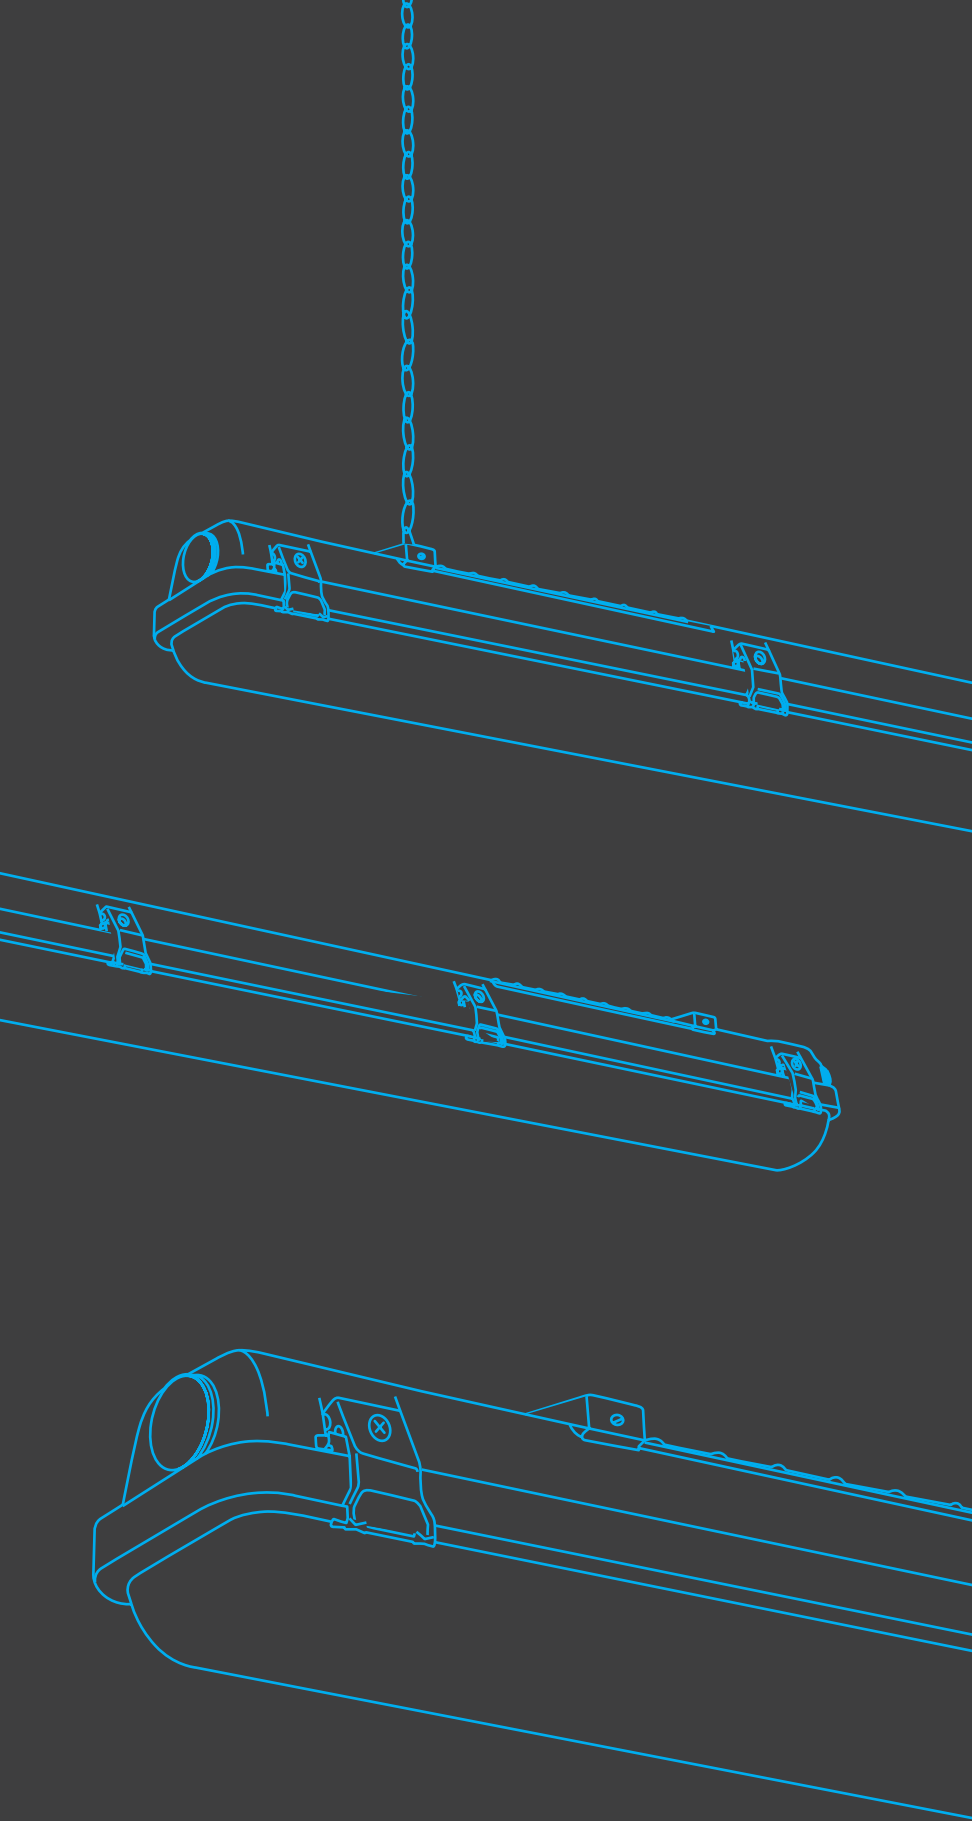

Can be used as
surface-mounted ceiling light
or pendant light




WATERPROOF

PRODUCT ADVANTAGES

Fully dust-tight and protected against strong jets of water by IP66
Easy change of colour temperature and total wattage via DIP switch
Tool-free through-wiring of two lights thanks to the supplied set
High convenience during installation due to removable gear tray
Energy savings of up to 60% compared to fluorescent lights



Multifunctional light
with IP66

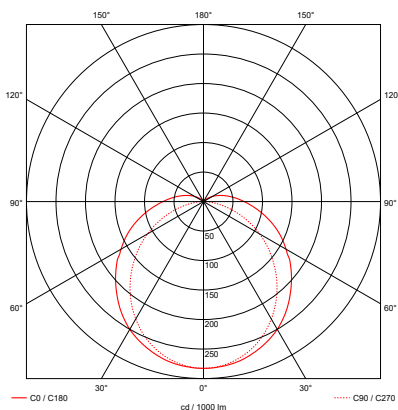

The graphic refers to article
1007490 in 32 W and 3000 K.

PRODUCT CHARACTERISTICS

Wet room light in two lengths: 1200 mm and 1500 mm
Switchable total wattage 18 W / 32 W
Multi-Colour: 3000 K / 4000 K
Available as DALI version with fixed total wattage and 4000 K
Excellent efficiency with over 120 lm/W





AREAS OF APPLICATION



Industrial rooms, garages, workshop

WATERPROOF




INDUSTRY



Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
WATERPROOF V 1200 <i>18 / 32 W, 830 / 840, IP66</i>	●	32 W	220-240 V		3860 lm	121 lm/W	3000 K
					4130 lm	129 lm/W	4000 K
WATERPROOF V DALI 1200 <i>36 W, 840, IP66</i>	●	36 W	220-240 V		4470 lm	124 lm/W	4000 K
WATERPROOF V 1500 <i>26 / 45 W, 830 / 840, IP66</i>	●	45 W	220-240 V		5670 lm	126 lm/W	3000 K
					5970 lm	133 lm/W	4000 K
WATERPROOF V DALI 1500 <i>36 W, 840, IP66</i>	●	50 W	220-240 V		6640 lm	132 lm/W	4000 K



CRI					Service life	UGR	Control	IP	IK	Prod no.	GBP
>80	-	-	-	-	 L80B10	-	-	66	08	1007490	69.00
>80	-	-	-	-	 L80B10	-		66	08	1007493	155.00
>80	-	-	-	-	 L80B10	-	-	66	08	1007491	82.00
>80	-	-	-	-	 L80B10	-		66	08	1007495	168.00

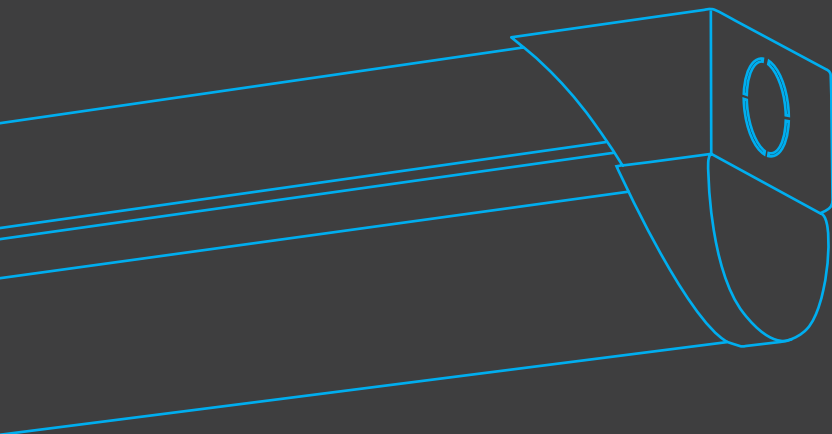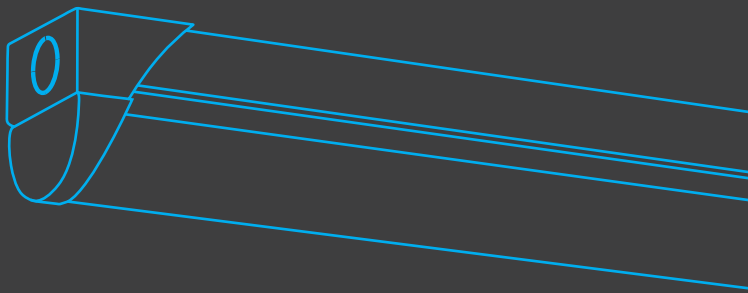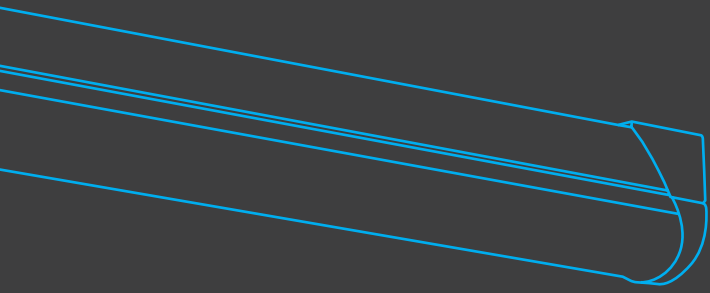

3000 K



4000 K



5700 K

INDUSTRY BATTEN



PRODUCT ADVANTAGES

Easy change of colour temperature and total wattage via DIP switch

Outstanding efficiency with up to 140 lm/W

Replacement product for the conventional T8 lights with up to 5800 lm

Tool-free electrical connection thanks to pressure clamp

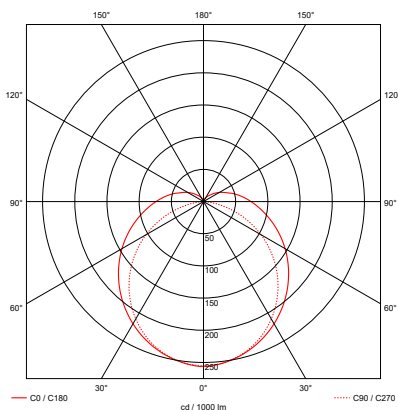

The graphic refers to the article 1007507 in 42 W and 3000 K.

PRODUCT CHARACTERISTICS

Available in two sizes: 1200 mm and 1500 mm

Switchable total wattage

Multi-Colour: 3000 K / 4000 K / 5700 K

CRI>80

AREAS OF APPLICATION


Workshop, industrial rooms, cellar







INDUSTRY BATTEN

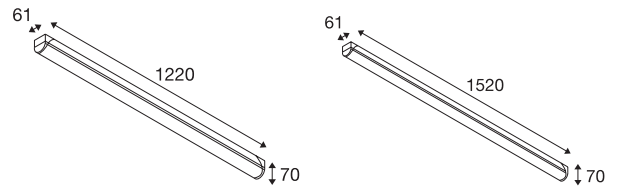
INDUSTRY




Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
INDUSTRY BATTEN V 1200 <i>18 / 32 W, 830 / 840 / 857</i>	○	32 W	220-240 V	⊕	3910 lm	122 lm/W	3000 K
					4350 lm	136 lm/W	4000 K
					4140 lm	129 lm/W	5700 K
INDUSTRY BATTEN V 1500 <i>22 / 42 W, 830 / 840 / 857</i>	○	42 W	220-240 V	⊕	5220 lm	124 lm/W	3000 K
					5760 lm	137 lm/W	4000 K
					5460 lm	130 lm/W	5700 K



CRI					Service life	UGR	Control	IP	IK	Prod no.	GBP
>80	150°	-	-	-	 L70B50	-	-	20	04	1007506	61.00
>80	150°	-	-	-	 L70B50	-	-	20	04	1007507	73.00

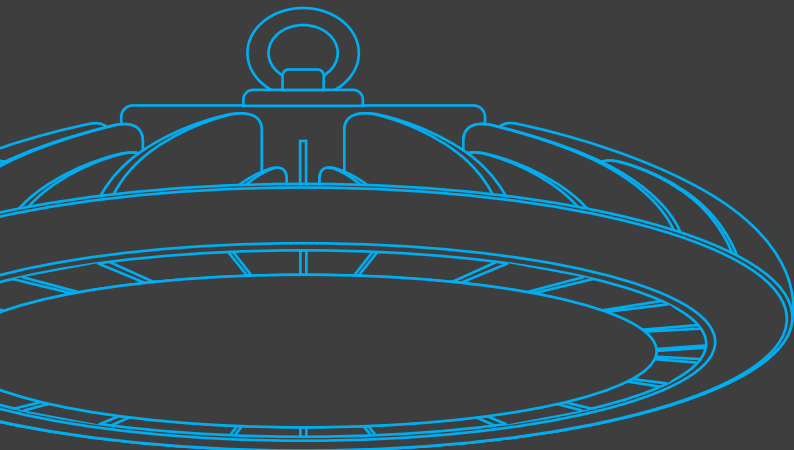

With suspension kit

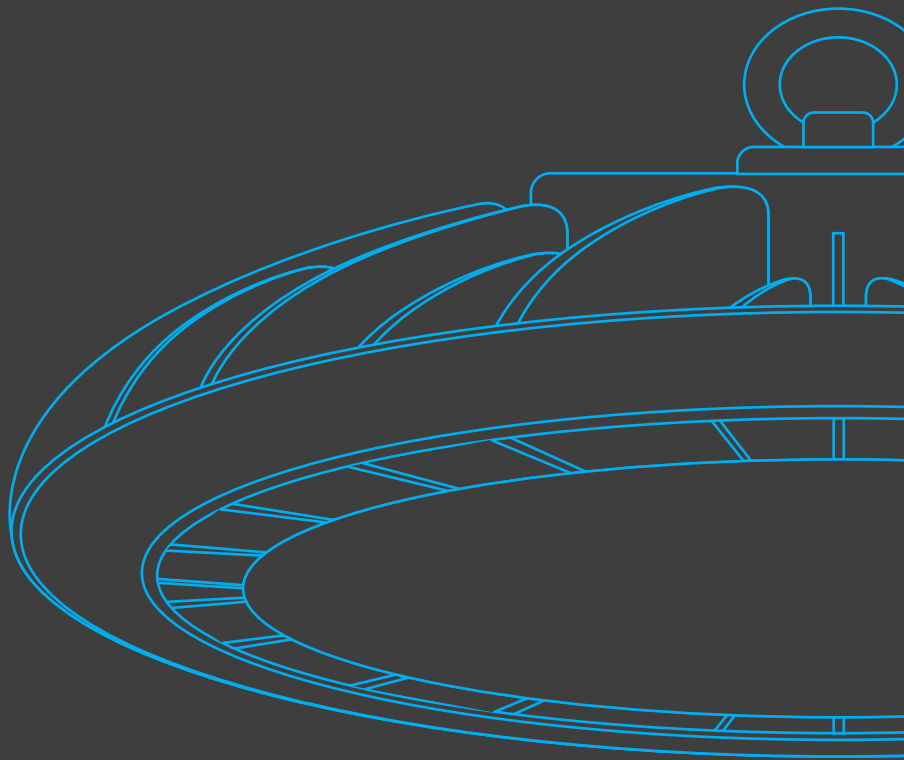

With reflector 100°





With mounting bracket

HIGHBAY

PRODUCT ADVANTAGES

- Energy savings of up to 65 % compared to conventional high-bay lights
- Easy change of total wattage via DIP switch
- Additional reflector available to reduce glare
- Optimised weight and size due to compact design
- High-quality appearance and modern design

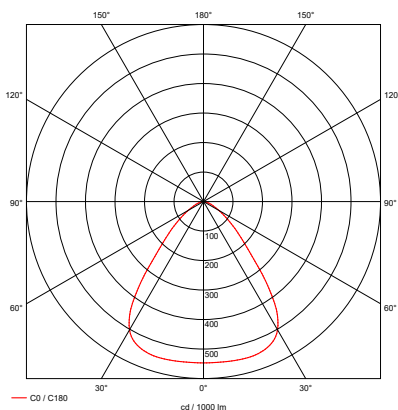

The graphic refers to article 1007679 in 200 W.

PRODUCT CHARACTERISTICS

- Switchable total wattage: 100 W / 120 W / 170 W / 200 W
- Luminous flux up to 32000 lm
- 4000 K
- Robust and universally applicable thanks to IK08 and IP65

AREAS OF APPLICATION


- Airports, industrial halls, warehouses

HIGHBAY

INDUSTRY



Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature	
HIGHBAY V 330 100 / 120 / 170 / 200 W, 840, 90°	●	200 W	220-240 V	⊕	32000 lm	160 lm/W	4000 K	



CRI					Service life	UGR	Control	IP	IK	Prod no.	GBP
>80	90°	-	-	-	L80B50	-	-	65	08	1007679	202.00



Ø x H (mm):
435 x 130




Ø x L (mm):
19,2 x 1500



L x W x H (mm):
202,5 x 49,6 x 132

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
HIGHBAY V 330 reflector 100°		-	-	-	1007677	43.00
HIGHBAY V suspension set 1500 mm	-	-	-	-	1007676	21.00
HIGHBAY V mounting bracket 60° adjustable black		-	-	-	1007678	21.00

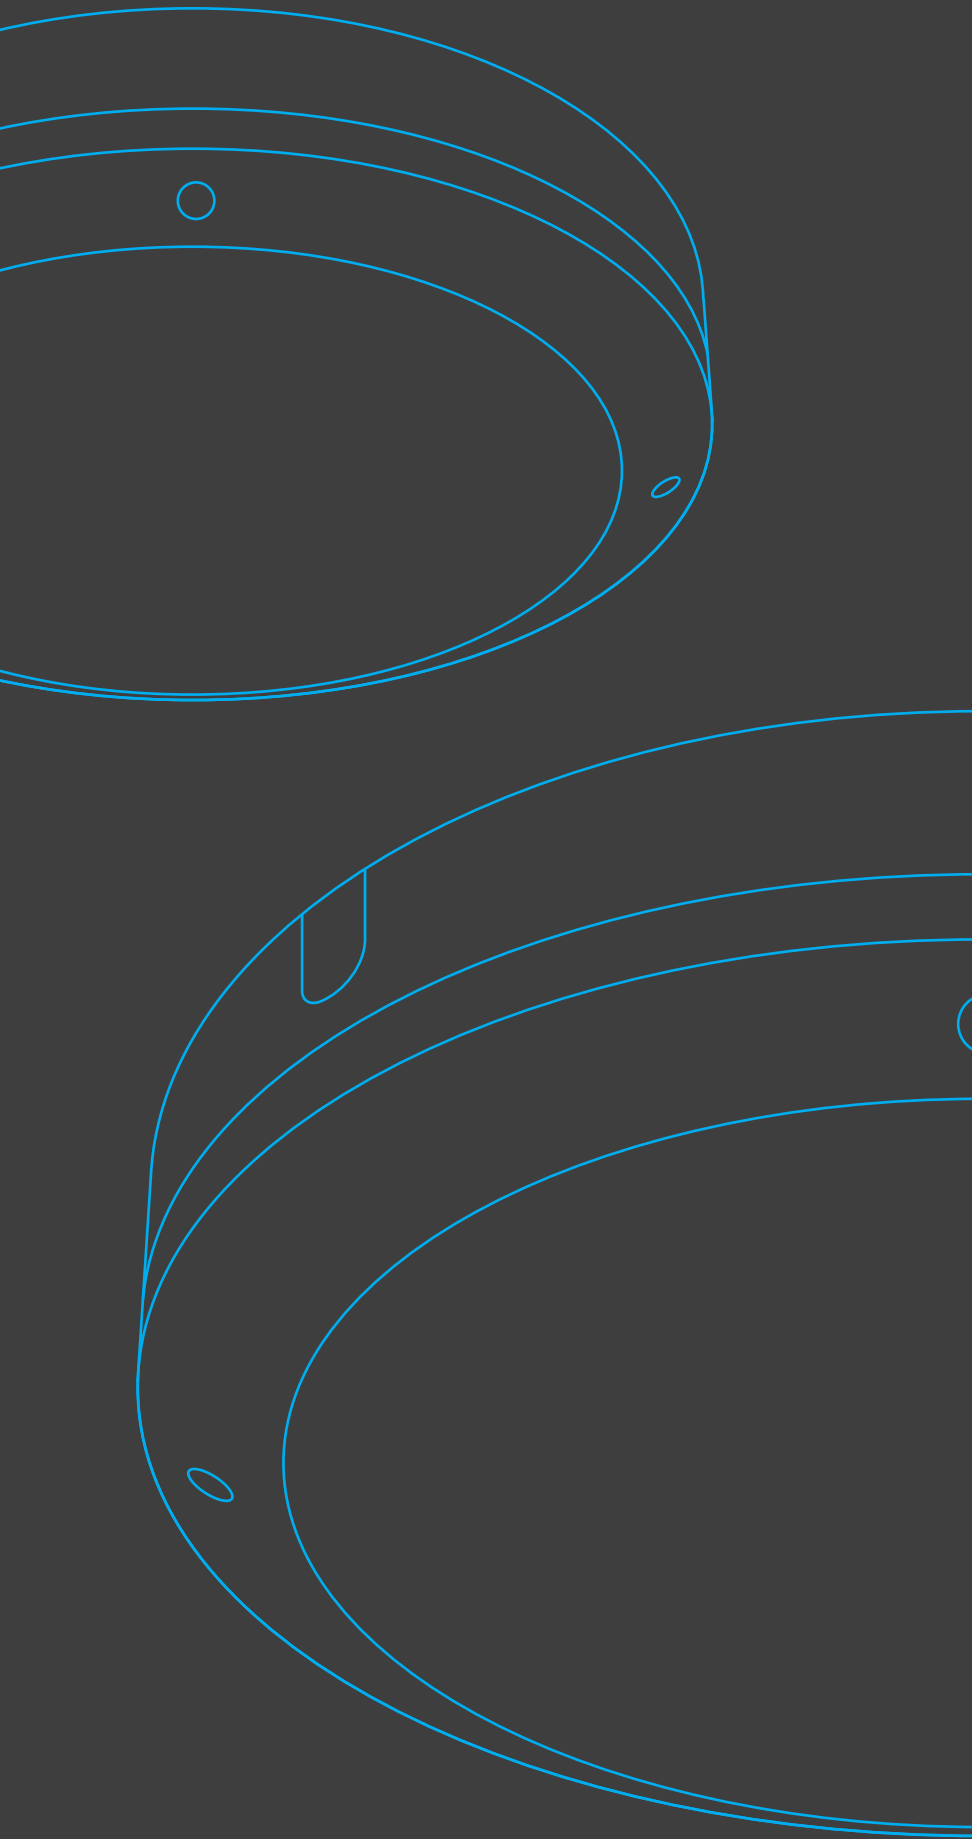

3000 K



4000 K



6500 K

OUTDOOR BULKHEAD



Robust and
vandal-proof
with IK10

PRODUCT ADVANTAGES


Robust outdoor light with a high protection against vandalism thanks to IK10

Easy change of colour temperature via DIP switch

High convenience during installation due to removable gear tray

High-quality light with homogeneous light emission

Energy savings of up to 55 % compared to lights with compact fluorescent lamps (CFLs)

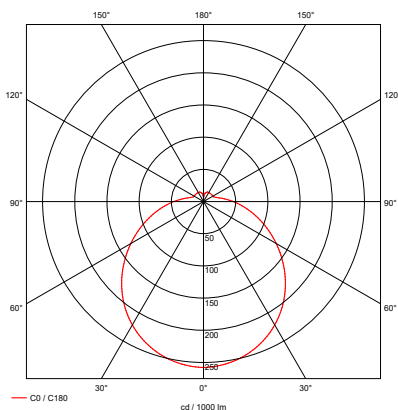

The graphic refers to the article
1007514 in 3000 K.

PRODUCT CHARACTERISTICS

Excellent protection thanks to IP65 and IK10

Multi-Colour: 3000 K / 4000 K / 6500 K

CRI>80

Additional version with microwave sensor available

AREAS OF APPLICATION


Public areas, facades, subways







OUTDOOR BULKHEAD


OUTDOOR



Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
OUTDOOR BULKHEAD V 360 <i>20 W, 830 / 840, IP65, IK10</i>	●	20 W	220-240 V	⊕	1750 lm	87,5 lm/W	3000 K
					1850 lm	92,5 lm/W	4000 K
					1900 lm	95 lm/W	6500 K
OUTDOOR BULKHEAD V 360 <i>20 W, 830 / 840, IP65, IK10, Sensor</i>	●	20 W	220-240 V	⊕	1750 lm	87,5 lm/W	3000 K
					1850 lm	92,5 lm/W	4000 K
					1900 lm	95 lm/W	6500 K



	CRI					Service life	UGR	Control	IP	IK	Prod no.	GBP
	>80	110°	-	-	-	 L80B50	-	-	65	10	1007514	73.00
	>80	110°	-	-	-	 L80B50	-	-	65	10	1007515	95.00

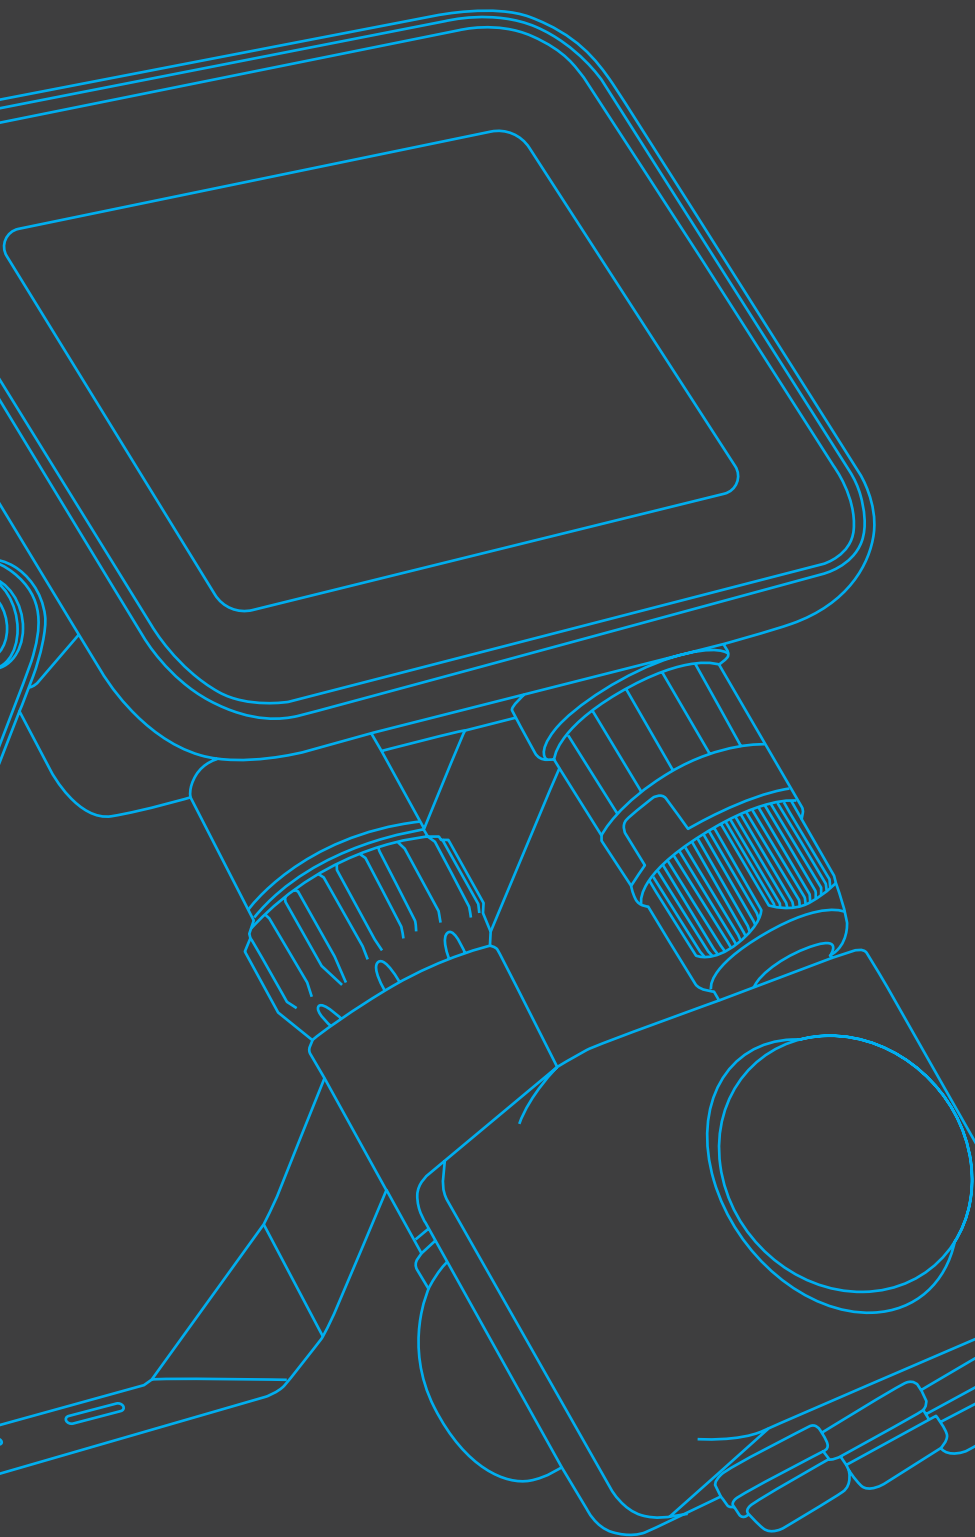

+



=



Motion sensor
available separately

FLOODI


PRODUCT ADVANTAGES

Energy savings of up to 90% compared to halogen lamp spotlights

Programmable sensor (available as accessory) enables illumination to be optimised as required

Easy adjustment of sensor range, daylight detection and dwell time

Easy installation thanks to integrated waterproof connection terminal

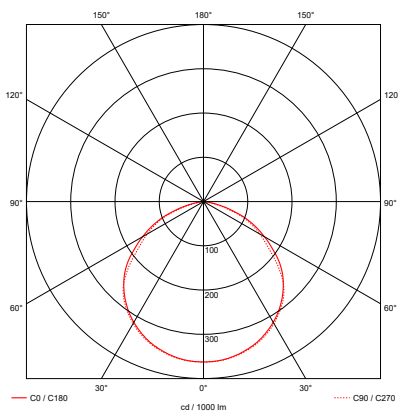

The graphic refers to article 1006193.

PRODUCT CHARACTERISTICS

Available in three sizes and power variants: 9.3 W / 30 W / 48 W

3000 K

High protection thanks to IP65 and IK06

CRI>80

AREAS OF APPLICATION


Area lighting, construction sites

FLOODI

OUTDOOR



Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
FLOODI S <i>9,3 W, 3000 K, 100°, anthracite / transparent</i>	●	9.3	220-240	⊕	1040 lm	111 lm/W	3000 K
FLOODI M <i>30 W, 3000 K, 100°, anthracite / transparent</i>	●	30	220-240	⊕	2980 lm	99 lm/W	3000 K
FLOODI L <i>48 W, 3000 K, 100°, anthracite / transparent</i>	●	48	220-240	⊕	5150 lm	107 lm/W	3000 K

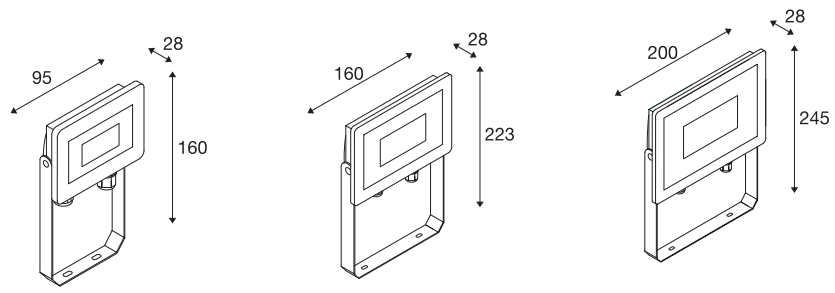


CRI					Service life	UGR	Control	IP	IK	Prod no.	GBP
>80	100°	-	-	-	 L70B50	-	-	65	06	1006191	26.00
>80	100°	-	-	-	 L70B50	-	-	65	06	1006192	39.00
>80	100°	-	-	-	 L70B50	-	-	65	06	1006193	52.00



L x W x H (mm):
44 x 69 x 57



Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
FLOODI motion sensor <i>black</i>		220-240 V	-	-	1006326	25.00

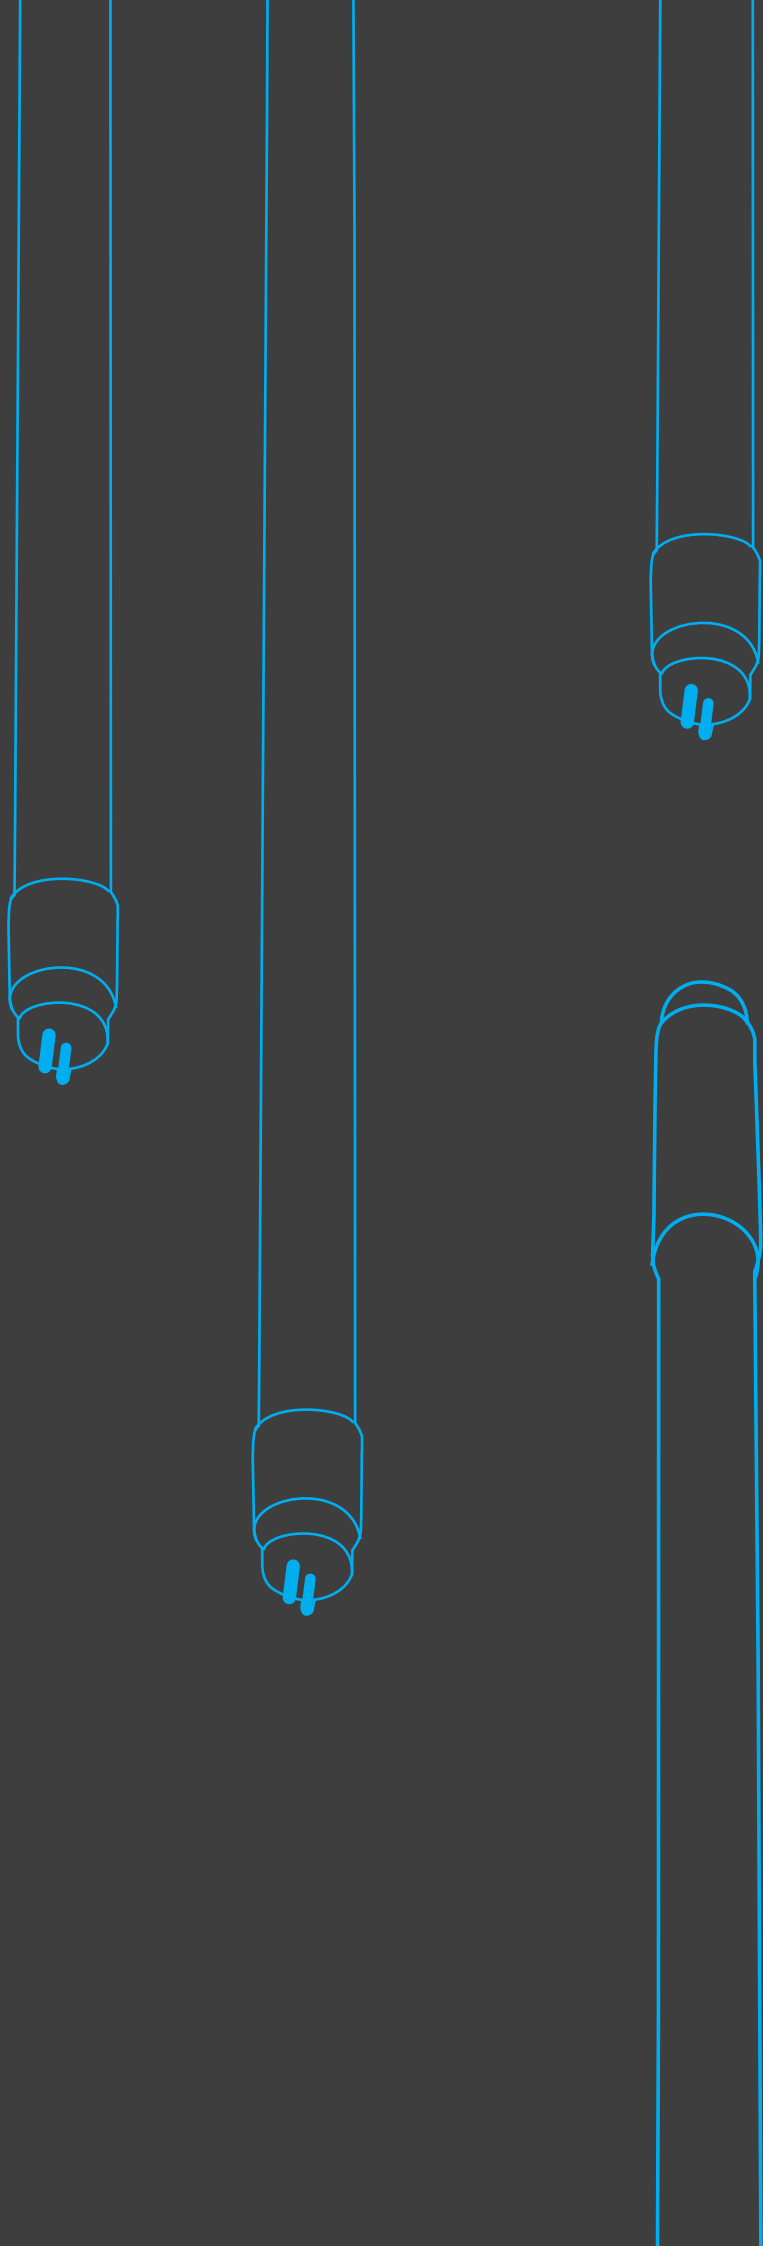

3000 K
4000 K
6500 K

LED TUBE

PRODUCT ADVANTAGES


EU-compliant LED replacement products for linear fluorescent lamps T5 and T8

High energy efficiency up to 150 lm/W

Splinter protection due to high-quality PET coating

Glass tubes prevent the product from sagging

Energy saving up to 60% compared to T8 fluorescent lamps

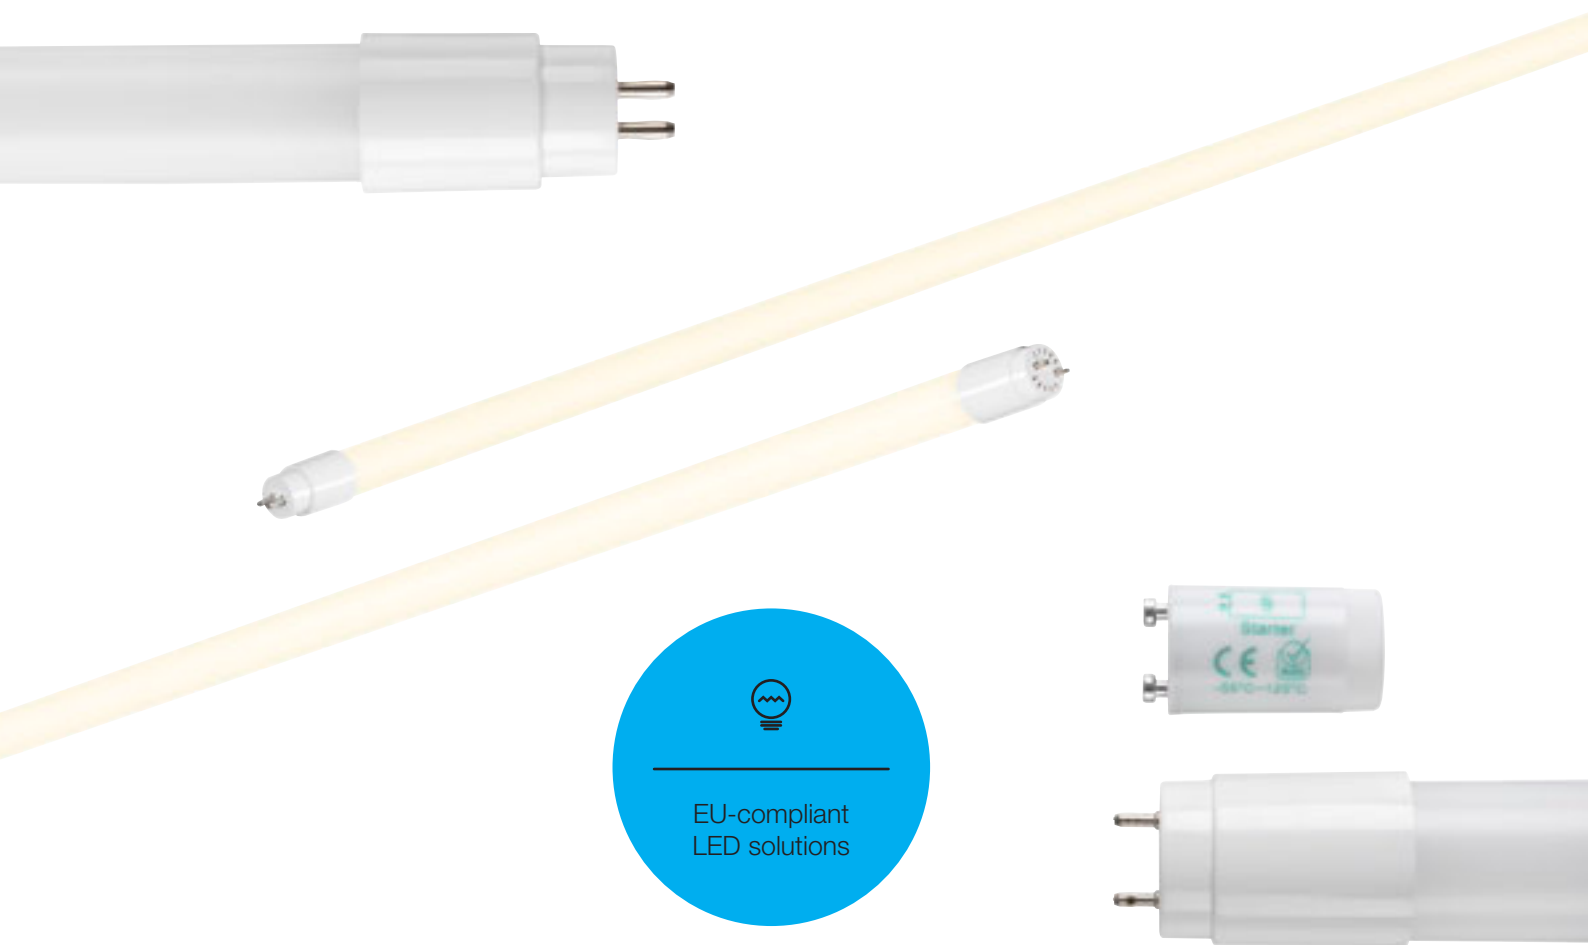

PRODUCT CHARACTERISTICS

All variants available in two sizes: 1200 mm and 1500 mm

Available colour temperatures: 3000 K, 4000 K, 6500 K

IP20

CRI>80

Light distribution: 200°

AREAS OF APPLICATION























Industry, supermarkets, garages








LED TUBE

LAMP



Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
LED Tube V T8 <i>Mains & Magnetic 1200, 16 W, 830</i>	○	16 W	220-240 V	-	1850 lm	116 lm/W	3000 K
LED Tube V T8 <i>Mains & Magnetic 1200, 16 W, 840</i>	○	16 W	220-240 V	-	2000 lm	125 lm/W	4000 K
LED Tube V T8 <i>Mains & Magnetic 1200, 16 W, 865</i>	○	16 W	220-240 V	-	2000 lm	125 lm/W	6500 K
LED Tube V T8 <i>Mains & Magnetic 1500, 22 W, 830</i>	○	22 W	220-240 V	-	2500 lm	114 lm/W	3000 K
LED Tube V T8 <i>Mains & Magnetic 1500, 22 W, 840</i>	○	22 W	220-240 V	-	2700 lm	123 lm/W	4000 K
LED Tube V T8 <i>Mains & Magnetic 1500, 22 W, 865</i>	○	22 W	220-240 V	-	2700 lm	123 lm/W	6500 K
LED Tube C T8 <i>Mains & Magnetic 1200, 16 W, 830</i>	○	16 W	220-240 V	-	2200 lm	138 lm/W	3000 K
LED Tube C T8 <i>Mains & Magnetic 1200, 16 W, 840</i>	○	16 W	220-240 V	-	2400 lm	150 lm/W	4000 K
LED Tube C T8 <i>Mains & Magnetic 1200, 16 W, 865</i>	○	16 W	220-240 V	-	2400 lm	150 lm/W	6500 K
LED Tube C T8 <i>Mains & Magnetic 1500, 24 W, 830</i>	○	24 W	220-240 V	-	3300 lm	138 lm/W	3000 K
LED Tube C T8 <i>Mains & Magnetic 1500, 24 W, 840</i>	○	24 W	220-240 V	-	3600 lm	150 lm/W	4000 K
LED Tube C T8 <i>Mains & Magnetic 1500, 24 W, 865</i>	○	24 W	220-240 V	-	3600 lm	150 lm/W	6500 K
LED Tube C T5 <i>Mains 1200, 26 W, 830</i>	○	26 W	220-240 V	-	3600 lm	138 lm/W	3000 K
LED Tube C T5 <i>Mains 1200, 26 W, 840</i>	○	26 W	220-240 V	-	3900 lm	150 lm/W	4000 K
LED Tube C T5 <i>Mains 1200, 26 W, 865</i>	○	26 W	220-240 V	-	3900 lm	150 lm/W	6500 K
LED Tube C T5 <i>Mains 1500, 34 W, 830</i>	○	34 W	220-240 V	-	4600 lm	135 lm/W	3000 K
LED Tube C T5 <i>Mains 1500, 34 W, 840</i>	○	34 W	220-240 V	-	5100 lm	150 lm/W	4000 K
LED Tube C T5 <i>Mains 1500, 34 W, 865</i>	○	34 W	220-240 V	-	5100 lm	150 lm/W	6500 K

CRI					Service life	UGR	Control	IP	IK	Prod no.	GBP
>80	-	-	-	-	 L70B50	-	On/Off	20	-	1007778	8.00
>80	-	-	-	-	 L70B50	-	On/Off	20	-	1007779	8.00
>80	-	-	-	-	 L70B50	-	On/Off	20	-	1007780	8.00
>80	-	-	-	-	 L70B50	-	On/Off	20	-	1007781	10.00
>80	-	-	-	-	 L70B50	-	On/Off	20	-	1007782	10.00
>80	-	-	-	-	 L70B50	-	On/Off	20	-	1007783	10.00
>80	-	-	-	-	 L70B50	-	On/Off	20	-	1007784	13.00
>80	-	-	-	-	 L70B50	-	On/Off	20	-	1007785	13.00
>80	-	-	-	-	 L70B50	-	On/Off	20	-	1007786	13.00
>80	-	-	-	-	 L70B50	-	On/Off	20	-	1007787	14.00
>80	-	-	-	-	 L70B50	-	On/Off	20	-	1007788	14.00
>80	-	-	-	-	 L70B50	-	On/Off	20	-	1007789	14.00
>80	-	-	-	-	 L70B50	-	On/Off	20	-	1007796	31.00
>80	-	-	-	-	 L70B50	-	On/Off	20	-	1007797	31.00
>80	-	-	-	-	 L70B50	-	On/Off	20	-	1007798	31.00
>80	-	-	-	-	 L70B50	-	On/Off	20	-	1007799	37.00
>80	-	-	-	-	 L70B50	-	On/Off	20	-	1007800	37.00
>80	-	-	-	-	 L70B50	-	On/Off	20	-	1007801	37.00

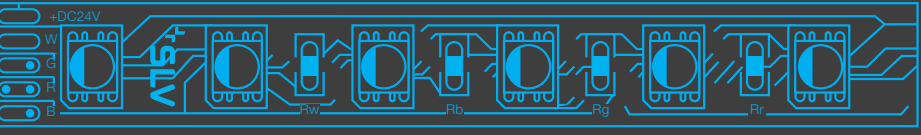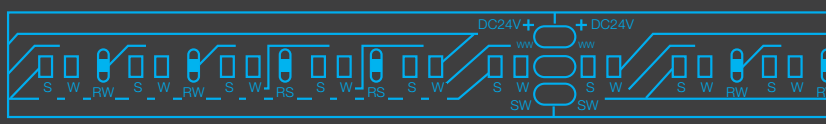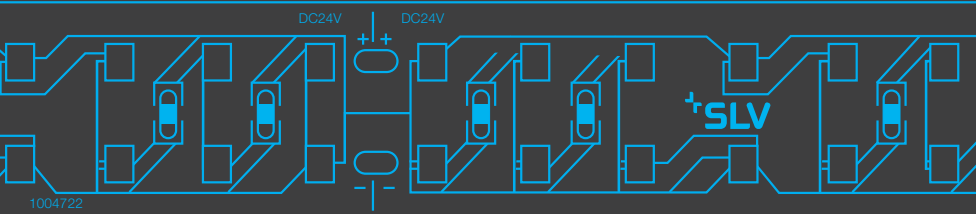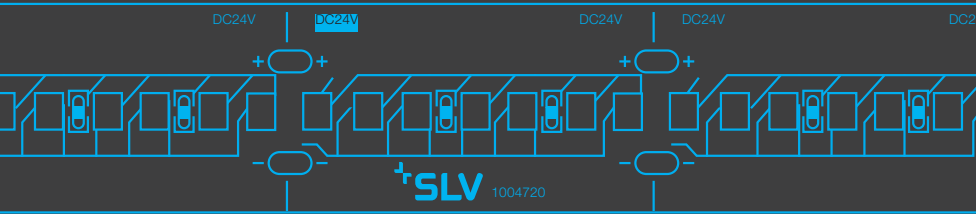

With RGB+W or TUNEABLE WHITE function



GRAZIA

PRODUCT ADVANTAGES

Wide range of high-quality LED strips for indirect lighting

Simple assembly thanks to pre-wired feed cables and high-quality 3M adhesive tape

Gold-plated solder pads simplify the soldering of cables



Outstanding
colour rendering
index CRI>90

PRODUCT CHARACTERISTICS

Flexible and cuttable

Smallest divisible unit between 36 mm and 100 mm, depending on product variant

Dimmable with SLV LED drivers

CRI>90

Pre-soldered cables at the ends

AREAS OF APPLICATION

Hotels, office, fashion shops

L x W x H:

5000 x 10 x 1,2 mm



Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
GRAZIA FLEXSTRIP LED 24 V, 10 mm, 5 m	○	-	24 V	III	3500 lm	-	2700 K
					3500 lm		3000 K
					3750 lm		4000 K

L x W x H:



5000 x 10 x 1,2 mm



Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
GRAZIA PRO FLEXSTRIP 24 V, 10 mm, 5 m	○	-	24 V	III	6500 lm	-	2700 K
					6500 lm		3000 K
					7000 lm		4000 K
GRAZIA PRO FLEXSTRIP 24 V, 10 mm, 5 m	○	-	24 V	III	8500 lm	-	2700 K
					8500 lm		3000 K
					9100 lm		4000 K
					9100 lm		6500 K

L x W x H:


5000 x 20 x 1,5 mm








Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
GRAZIA PRO MAX FLEXSTRIP 24 V, 20 mm, 5 m	○	-	24 V	III	12500 lm	-	3000 K
					13000 lm		4000 K
GRAZIA PRO MAX FLEXSTRIP 24 V, 20 mm, 5 m, 20000 lm	○	-	24 V	III	20000 lm	-	3000 K
					21400 lm		4000 K







L x W x H:







5000 x 10 x 1,2 mm 5000 x 12 x 2,2 mm









Product designation	Colour	Total wattage	Mains voltage	Protection class	Luminous flux	Efficiency	Colour temperature
GRAZIA PRO FLEXSTRIP 24 V, 10 mm, 2700-6500 K	○	-	24 V	III	-	-	D2W 2700-6500 K
GRAZIA PRO FLEXSTRIP 24 V, 12 mm, RGBW	○	-	24 V	III	-	-	-

	CRI					Service life	UGR	Control	IP	IK	Prod no.	GBP
	>90	120°	-	-	-		-	-	20	-	1004708	67.00
											1004709	67.00
											1004710	67.00

	CRI					Service life	UGR	Control	IP	IK	Prod no.	GBP
	>90	120°	-	-	-		-	-	20	-	1004712	108.00
											1004713	108.00
											1004714	108.00
	>90	120°	-	-	-		-	-	20	-	1004716	125.00
											1004717	125.00
											1004718	125.00
											1004719	125.00

	CRI					Service life	UGR	Control	IP	IK	Prod no.	GBP
	>90	120°	-	-	-		-	-	20	-	1004720	171.00
											1004721	171.00
	>90	120°	-	-	-		-	-	20	-	1004722	301.00
											1004723	301.00

	CRI					Service life	UGR	Control	IP	IK	Prod no.	GBP
	>90	120°	-	-	-		-	-	20	-	1004725	132.00
	>90	120°	-	-	-		-	-	20	-	1004727	133.00

FLEX STRIPS

OVERVIEW

GRAZIA LED

1004708
1004709
1004710

70 LEDs/m

GRAZIA PRO

1004712
1004713
1004714




126 LEDs/m

GRAZIA PRO

1004716
1004717
1004718
1004719

168 LEDs/m

5000
mm

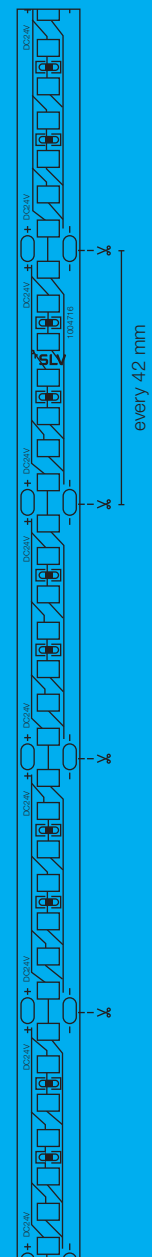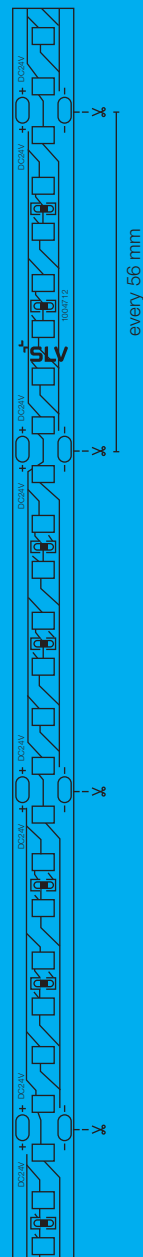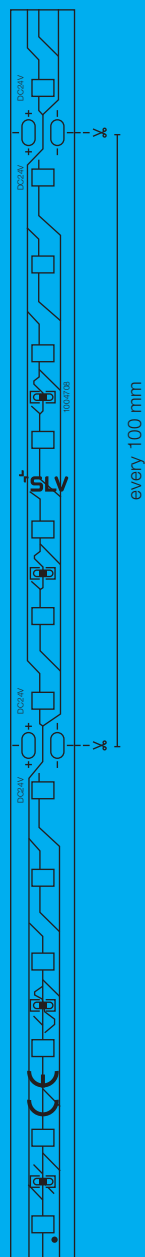



All GRAZIA LED strips are based on 24 V.
Matching drivers and additional accessories
can be found on pages 64–71.

GRAZIA PRO MAX

1004720
1004721

196 LEDs/m

GRAZIA PRO MAX

1004722
1004723

196 LEDs/m

GRAZIA PRO MAX TUNABLE WHITE

1004725





224 LEDs/m

GRAZIA PRO MAX

RGBW

1004727

70 LEDs/m

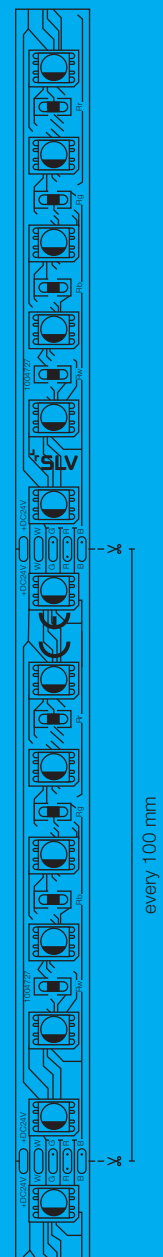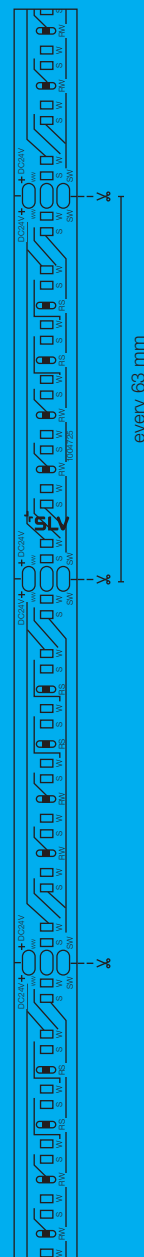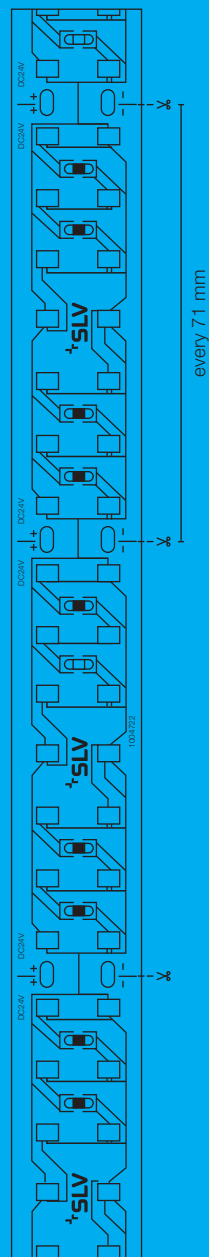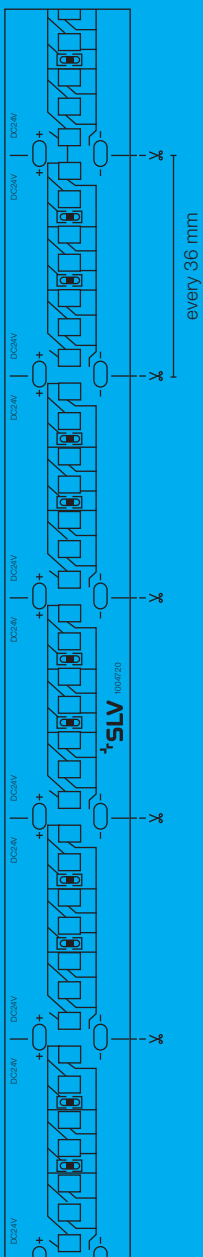


GRAZIA 10


FLEX STRIPS ACCESSORIES



L x W x H (mm):
2000 x 30 x 16,2

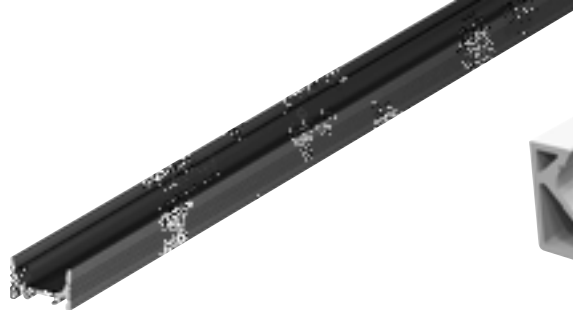

2000 x 17,5 x 11

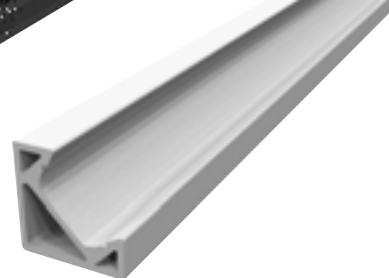

2000 x 19,5 x 19,5

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
GRAZIA 10 <i>Recessed profile, LED, 2 m, black</i>	●	-	-	-	1000459	28.00
GRAZIA 10 <i>Recessed profile, LED, 2 m, white</i>	○	-	-	-	1000458	28.00

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
GRAZIA 10 <i>Surface-mounted profile, LED, flat, grooved, 2 m, black</i>	●	-	-	-	1000462	25.00
GRAZIA 10 <i>Surface-mounted profile, LED, flat, grooved, 2 m, white</i>	○	-	-	-	1000461	25.00

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
GRAZIA 10 EDGE <i>2 m, white</i>	○	-	-	-	1004890	34.00
GRAZIA 10 EDGE <i>2 m, aluminium</i>	●	-	-	-	1004889	34.00





L x W x H (mm):
2000 x 15,8 x 4

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
COVER FLAT DESIGN <i>For GRAZIA 10, 2 m, frosted</i>	○	-	-	-	1000468	21.00
COVER FLAT DESIGN <i>For GRAZIA 10, 2 m, milky</i>	○	-	-	-	1000466	16.00
COVER FLAT DESIGN <i>For GRAZIA 10, 2 m, satin finish</i>	○	-	-	-	1000469	21.00



L x W x H (mm):
30 x 16,2 x 11

17,5 x 11 x 5,5

20 x 7 x 20

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
END CAPS <i>For GRAZIA 10 recessed profile, 2 pieces, black</i>	●	-	-	-	1000474	6.00
END CAPS <i>For GRAZIA 10 recessed profile, 2 pieces, white</i>	○	-	-	-	1000473	6.00
END CAPS FLAT DESIGN <i>For GRAZIA 10 surface-mounted profile flat, 2 pieces, black</i>	●	-	-	-	1000477	6.00
END CAPS FLAT DESIGN <i>For GRAZIA 10 surface-mounted profile flat, 2 pieces, white</i>	○	-	-	-	1000476	6.00
END CAPS <i>For GRAZIA 10 EDGE, white</i>	○	-	-	-	1004894	2.00
END CAPS <i>For GRAZIA 10 EDGE, aluminium</i>	●	-	-	-	1004893	2.00



L x W x H (mm):
15,3 x 3 x 10

22,5 x 150 x 22,5

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
MOUNTING CLIP <i>For GRAZIA 10 surface-mounted profile, invisible, 2 pieces</i>	●	-	-	-	1000487	4.00
MOUNTING CLIP <i>For GRAZIA 10 surface-mounted profile, grooved, 45°, visible, 2 pieces</i>	○	-	-	-	1000489	5.00
MOUNTING CLIP <i>For GRAZIA 10 EDGE</i>	●	-	-	-	1004895	4.00

GRAZIA 20

FLEX STRIPS ACCESSORIES




L x W x H (mm):

3000 x 52 x 32



3000 x 35 x 32

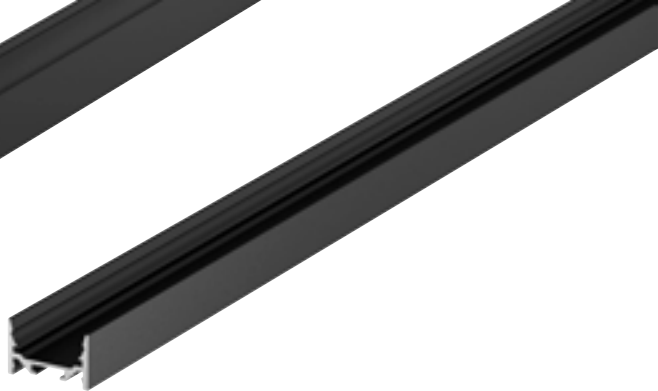

3000 x 35 x 22

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
GRAZIA 20 <i>Recessed profile, LED, 3 m, black</i>	●	-	-	-	1000498	91.00
GRAZIA 20 <i>Recessed profile, LED, 3 m, white</i>	○	-	-	-	1000497	91.00

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
GRAZIA 20 <i>Surface mounted profile, LED, standard, smooth, 3 m, black</i>	●	-	-	-	1000525	77.00
GRAZIA 20 <i>Surface mounted profile, LED, standard, smooth, 3 m, white</i>	○	-	-	-	1000524	77.00

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
GRAZIA 20 <i>Surface mounted profile, LED, flat, smooth, 3 m, black</i>	●	-	-	-	1000534	65.00
GRAZIA 20 <i>Surface mounted profile, LED, flat, smooth, 3 m, white</i>	○	-	-	-	1000533	65.00





L x W x H (mm):
3000 x 32 x 6

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
COVER FLAT DESIGN <i>For GRAZIA 20, plastic, 3 m, frosted</i>	○	-	-	-	1000546	36.00
COVER FLAT DESIGN <i>For GRAZIA 20, plastic, 3 m, milky</i>	○	-	-	-	1000549	36.00
COVER FLAT DESIGN <i>For GRAZIA 20, plastic, 3 m, satin finish</i>	○	-	-	-	1000540	36.00



L x W x H (mm):
52 x 32 x 16

35 x 22 x 10

35 x 32 x 10

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
END CAPS <i>For GRAZIA 20 recessed profile, 2 pieces, black</i>	●	-	-	-	1000558	8.00
END CAPS <i>For GRAZIA 20 recessed profile, 2 pieces, white</i>	○	-	-	-	1000557	8.00
END CAPS FLAT DESIGN <i>For GRAZIA 20 surface-mounted profile flat, 2 pieces, black</i>	●	-	-	-	1000561	8.00
END CAPS FLAT DESIGN <i>For GRAZIA 20 surface-mounted profile flat, 2 pieces, white</i>	○	-	-	-	1000560	8.00
END CAPS FLAT DESIGN <i>For GRAZIA 20 surface-mounted profile flat, 2 pieces, black</i>	●	-	-	-	1000567	8.00
END CAPS FLAT DESIGN <i>For GRAZIA 20 surface-mounted profile flat, 2 pieces, white</i>	○	-	-	-	1000566	8.00



L x W x H (mm):
30 x 8 x 20

55 x 70 x 23

38 x 14 x 4

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
MOUNTING SPRING <i>For GRAZIA 20, chrome / aluminium, 2 pieces</i>	●	-	-	-	1004932	19.00
LONGITUDINAL CONNECTOR <i>For GRAZIA 20, 2 pieces</i>	●	-	-	-	1000571	11.00
PENDANT SUSPENSION <i>FOR GRAZIA 20 surface-mounted profile, 2 m, LED, 2 pieces</i>	●	-	-	-	1000535	24.00
MOUNTING CLIP <i>FOR GRAZIA 20 surface-mounted profile, LED, invisible, 2 pieces</i>	●	-	-	-	1000536	4.00

GRAZIA 60

FLEX STRIPS ACCESSORIES



L x W x H (mm):

1500/3000 x 86 x 33

1500 x 61 x 12

1500/3000 x 70 x 95

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
GRAZIA 60 <i>Profile recessed, 1.5 m, black</i>	●	-	-	-	1004905	58.00
GRAZIA 60 <i>Profile recessed, 1.5 m, white</i>	○	-	-	-	1004906	58.00
GRAZIA 60 <i>Profile recessed, 3 m, black</i>	●	-	-	-	1004907	115.00
GRAZIA 60 <i>Profile recessed, 3 m, white</i>	○	-	-	-	1004908	115.00

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
GRAZIA 60 <i>Profile surface-mounted, 1.5 m, black</i>	●	-	-	-	1004902	31.00
GRAZIA 60 <i>1.5 m, black</i>	●	-	-	-	1004896	92.00
GRAZIA 60 <i>1.5 m, white</i>	○	-	-	-	1004897	92.00
GRAZIA 60 <i>3 m, black</i>	●	-	-	-	1004898	189.00
GRAZIA 60 <i>3 m, white</i>	○	-	-	-	1004899	189.00

L x W x H (mm):

80 x 42 x 24



Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
FEED-IN SET <i>For GRAZIA 60</i>	●	-	-	-	1004904	12.00





L x W x H (mm):
1500 x 65 x 6,5

3000 x 65 x 6,5

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
COVER For GRAZIA 60, 1.5 m, black	●	-	-	-	1004912	25.00
COVER For GRAZIA 60, 1.5 m, white	○	-	-	-	1004913	25.00
PC COVER For GRAZIA 60, 1.5 m, frosted	○	-	-	-	1004914	16.00
PMMA COVER For GRAZIA 60, 1.5 m, frosted	○	-	-	-	1004916	20.00
PC COVER For GRAZIA 60, 3 m, frosted	○	-	-	-	1004915	31.00
PMMA COVER For GRAZIA 60, 3 m, frosted	○	-	-	-	1004917	38.00



L x W x H (mm):
86 x 33 x 25

70 x 95 x 20

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
END CAPS For GRAZIA 60 recessed, black	●	-	-	-	1004909	8.00
END CAPS For GRAZIA 60 recessed, white	○	-	-	-	1004910	8.00
END CAPS For GRAZIA 60 recessed, black	●	-	-	-	1004900	11.00
END CAPS For GRAZIA 60, white	○	-	-	-	1004901	11.00




L x W x H (mm):
130 x 28 x 40

80 x 42 x 10

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
MOUNTING CLIPS For GRAZIA 60 recessed	●	-	-	-	1004911	14.00
LONGITUDINAL CONNECTOR For GRAZIA 60	●	-	-	-	1004903	11.00

UNIVERSAL DEVICES

OPERATING DEVICES & CONTROLLERS



L x W x H (mm):

145 x 46,5 x 16

115 x 41 x 25

300 x 30 x 16

ø x H (mm):

55 x 25

55 x 22

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
CONTROLLER CCT, RGBW, 12-24 V, ZigBee 3.0	○	12 V	⚡	-	1006348	69.00
LED POWER SUPPLY 20 W, 12 / 24 V	○	220-240 V	□	-	1005381	34.00
LED POWER SUPPLY 30 W, 24 V, weiß	○	220-240 V	□	-	1007250	43.00
LED POWER SUPPLY 15 W, 12 V	○	200-240 V	□	-	1005444	26.00
LED POWER SUPPLY 15 W, 24 V	○	200-240 V	□	-	1005445	26.00



L x W x H (mm):

128 x 52 x 30

184 x 61 x 32

210 x 67 x 34

116 x 42 x 18

202 x 58 x 30

347 x 40 x 22

Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
LED POWER SUPPLY 25 W, 24 V, white, dimmable	○	220-240 V	□	Ⓢ	1006336	31.00
LED POWER SUPPLY 50 W, 24 V, TRIAC dimmable	○	220-240 V	□	Ⓢ	1003104	43.00
LED POWER SUPPLY 100 W, 24 V, TRIAC dimmable	○	220-240 V	□	Ⓢ	1003105	104.00
DALI PUSH-DIM CONTROL 24 V	○	10 V	□	Ⓢ	1003106	55.00
LED POWER SUPPLY 60 W, DALI, 24 V, 2 channel Tunable White	○	220-240 V	□	Ⓢ	1006133	132.00
LED POWER SUPPLY 100 W, DALI, 24 V, 2 channel Tunable	○	220-240 V	□	Ⓢ	1006134	158.00



L x W x H (mm):

300 x 30 x 16

350 x 30 x 18





350 x 30 x 18

350 x 30 x 18

350 x 30 x 18

400 x 40 x 22

400 x 40 x 22


Product designation	Colour	Mains voltage	Protection class	Control	Prod no.	GBP
LED POWER SUPPLY 30 W, 24 V, white, DALI	○	220-240 V	□		1007254	52.00
LED POWER SUPPLY 100 W, 24 V, white, DALI	○	200-240 V	□		1007255	95.00
LED POWER SUPPLY 100 W, 24 V, white	○	200-240 V	□	-	1007251	69.00
LED POWER SUPPLY 150 W, 24 V, white, DALI	○	220-240 V	□		1007256	121.00
LED POWER SUPPLY 150 W, 24 V, white	○	220-240 V	□	-	1007252	86.00
LED POWER SUPPLY 250 W, 24 V, white, DALI	○	220-240 V	□		1007257	138.00
LED POWER SUPPLY 250 W, 24 V, white	○	220-240 V	□	-	1007253	103.00



COLOUR EXPLANATION




Anthracite



Black



Grey



White



Chrome



Silver




Aluminium



Gold

EXPLANATION OF SYMBOLS



Dimmable with:

- **C** = Trailing-edge phase dimmer
- **L** = Leading-edge phase dimmer
- **DALI** = DALI bus system



Protection classes:

- Protection class I / protective conductor
- Protection class II / protection by double or reinforced insulation



Half-diffusion angle:

Describes the beam angle in degrees. The smaller the angle, the more concentrated the light will be.



Pivoting capacity in degrees:



Through-wiring possible



Service life

A large part of the products shown in this brochure are protected by trademarks, registered designs, utility models or patents. Any violation of these property rights or the use of text and layout design or copyrighted images without our authorisation will be prosecuted. The illustrations and information contained in this brochure are for illustrative purposes only and are not legally binding in terms of colour, shape, design or technical details. Product descriptions and specifications are subject to correction and amendment.

All products in our range are subject to our strict quality assurance procedures and comply with generally applicable standards. This brochure contains a general range and is not country specific. Any deviations from country-specific guidelines must be clarified before ordering. SLV cannot be held responsible for any deviations in terms of technical standards. All weights and dimensions are given in kg and cm respectively unless stated otherwise. We reserve the right to make technical changes!

SLV is entitled to adjust the respective price list to changing market conditions, in the event of significant changes in procurement costs, changes in value added tax or procurement prices.

SLV GmbH | Daimlerstraße 21-23, 52531 Uebach-Palenberg, Germany, +49 (0) 2451 4833 - 333, info@slv.de
SLV Austria | +49 (2451) 4833 355, export@slv.de
SLV Belgium | Herentalsebaan 429, B-2160 Wommelgem, +32 (0) 3/385 30 08, info@slv.be
SLV Nordics | Flade Engvej 4, 9900 Frederikshavn, Denmark, +45 9310 7474, info@nordics.slv.com
SLV France | Zac du Martelet, 88, rue Henri Dépaigneux, F-69400 Limas, +33 4 74 02 71 20, infofr@slv.com
SLV LIGHTING UK LTD | Unit E Chiltern Park, Boscombe Road, Dunstable, LU5 5LT, +44 (0)203 968 11 00, sales@uk.slv.com
SLV Italia S.r.l. | Via Lecco, 19/D, 23896 Bevera di Sirtori (LC), +39 039 5983575, infoit@slv.com
SLV Nederland | Kazernestraat 19, 5928 NL Venlo, +31 773204343, info@slv.nl
SLV i Norge, del av SLV Nordics | Tors veg 9B, 7035 Trondheim, +47 4777 1080, post-no@slv.com
SLV Poland | +48 (22) 7224975, slv@slv.pl
SLV Portugal | R. Margarida de Abreu, no13 – Lj2, 1900-314 Lisboa, +351 210 185 961, info@pt.slv.com
SLV Swiss SA | Route du Bey 6 Box 1-4, Z.I. La Jonnaire, CH-1847 Rennaz, +41 218113232, info@slv-swiss.ch
SLV d.o.o | Barjanska cesta 50, SI-1000 Ljubljana, +386 1 2009 730, info@slv.si
SLV Spain | Antic Camí Ral Valencia, 38, L17, 08860 Castelldefels, Barcelona, 931 168 161, info@slv.es
SLV Czech s.r.o. | V Sedlci 28/17, CZ-160 00 Praha 6, +420 739 282 151, info@cz.slv.com